

GOLD

Dalgıç Pompa Submersible Pump



GOLD

Dalgıç Pompa Submersible Pump



PASLANMAZ POMPA SERİSİ STAINLESS STEEL PUMP SERIES

5" GP 520 - GP 530

6" GP 610 - GP 617 - GP 620 - GP630
GP 646 - GP 660 - GP 675 - GP 695

8" GP 877 - GP 895 - GP 8110 - GP 8125 - GP 8160

10" GP 10216



GOLD

Dalgıç Pompa Submersible Pump

Product key Type

ürün tipi:

GP : 8125/03

GP : Company name

Pompa tipi

8" : Pump Diameter

Pompa Çapı

125 : Best efficiency point (m3/h)

En iyi verimlilik noktası

(m3/h)

3 : Number of stages

Kademe sayısı



Specifications: Özellikler:

- Pumps are produced as standard from AISI 304 stainless steel

Pompalar standart olarak AISI 304 paslanmaz çelikten üretilmektedir

- Stage and impeller stainless steel (AISI 304).

kademe ve fan paslanmaz çelik (AISI 304).

- Suction – outlet stainless steel (AISI 304).

Emici ve çıkış paslanmaz çelik (AISI 304).

- Pump can supply water up to 270 m3/h.

Pompa 270 m3/h kadar su sağlayabilir.

- Max. sand content : 50 gr/m3.

Maks. kum içeriği: 50 gr / m3.



GOLD

Dalgıç Pompa Submersible Pump

**GP
520**

HP (1 - 40) hp
Q best efficiency 20m³/h

**GP
530**

HP (1.5 - 60)hp
Q best efficiency 30m³/h

**GP
610**

HP (0.75 - 30)hp
Q best efficiency 10m³/h

**GP
617**

HP (0.75 - 50)hp
Q best efficiency 17m³/h

**GP
620**

HP (1 - 60) hp
Q best efficiency 20m³/h

**GP
630**

HP (1.5 - 70)hp
Q best efficiency 30m³/h

**GP
646**

HP (2 - 100)hp
Q best efficiency 46m³/h

**GP
660**

HP (3 - 110)hp
Q best efficiency 60m³/h



GOLD

Dalgıç Pompa Submersible Pump

**GP
675**

HP (4 - 75) hp
Q best efficiency 75m³/h

**GP
695**

HP (5.5 - 80)hp
Q best efficiency 95m³/h

**GP
877**

HP (5.5 - 125)hp
Q best efficiency 77m³/h

**GP
895**

HP (7.5 - 150)hp
Q best efficiency 95m³/h

**GP
8110**

HP (10 -200) hp
Q best efficiency 110m³/h

**GP
8125**

HP (10 - 200)hp
Q best efficiency 125m³/h

**GP
8160**

HP (12.5 - 225)hp
Q best efficiency 160m³/h

**GP
10216**

HP (20 - 250)hp
Q best efficiency 216m³/h



GOLD

Dalgıç Pompa Submersible Pump



GOLD

Dalgıç Pompa Submersible Pump



GP PASLANMAZ ÇELİK DALGIÇ POMPALARI

GP STAINLESS STEEL SUBMERSIBLE PUMPS



- 1- Çıkış
outlet
- 2- Klepe
Valve
- 3- Fan
Impeller
- 4- Fan Lastiği
Neckring
- 5- Mil Lastiği
Bearing
- 6- Kademe
Diffuser
- 7- Fan
Impeller
- 8- Emiş Kutusu
Suction Case
- 9- Mil
Shaft
- 10- Kaplin
Coupling




Paslanmaz Dalgıç Pompa / 520 Serisi


Stainless Steel Submersible Pumps / 520 Series 50HZ

Pompa Tipi Pumps Type	Güç Power		Debi / Flow								Pompa Ağırlık	Pompa Boy	Çıkış Out Inch	
			m³/h	0.0	14.0	16.0	18.0	20.0	22.0	24.0	26.0	Pump Weight		Pump length
	l/s	0.00	3.89	4.44	5.00	5.56	6.11	6.67	7.22	Kg	cm			
GP 520 / 01	0.75	1	Basma Yüksekliği mSS / Head mSS	12	10	9	8	7	6	5	4	6	33	2½"
GP 520 / 02	1.5	2		19	14	12	10	9	8	7	6	8	42	
GP 520 / 03	2.2	3		30	22	20	18	15	13	11	9	10	51	
GP 520 / 04	2.2	3		41	31	30	28	26	22	16	14	13	60	
GP 520 / 05	3	4		52	40	39	37	34	30	24	20	15	69	
GP 520 / 06	4	5.5		63	49	47	45	41	37	31	26	17	79	
GP 520 / 07	4	5.5		74	58	54	52	47	43	37	31	20	88	
GP 520 / 08	5.5	7.5		85	67	63	59	55	49	42	35	22	97	
GP 520 / 09	5.5	7.5		96	75	71	67	62	55	48	39	24	106	
GP 520 / 10	5.5	7.5		105	84	79	75	69	62	54	44	27	115	
GP 520 / 11	7.5	10		116	92	88	82	76	68	60	49	29	124	
GP 520 / 12	7.5	10		127	101	96	89	83	74	65	53	31	133	
GP 520 / 13	7.5	10		137	109	103	97	90	81	70	57	33	142	
GP 520 / 14	9.2	12.5		148	117	110	104	97	87	76	61	36	151	
GP 520 / 15	9.2	12.5		157	126	118	111	104	93	81	66	38	160	
GP 520 / 16	9.2	12.5		168	134	126	118	111	99	86	70	40	170	
GP 520 / 17	11	15		177	143	134	126	118	105	91	75	43	179	
GP 520 / 18	11	15		188	151	142	133	124	111	97	79	45	188	
GP 520 / 19	11	15		198	159	150	141	131	117	102	83	47	197	
GP 520 / 20	11	15		210	167	158	149	138	124	107	88	50	206	
GP 520 / 21	13	17.5		221	175	166	157	145	130	112	92	52	215	
GP 520 / 22	13	17.5		232	183	175	164	152	137	118	97	54	224	
GP 520 / 23	13	17.5		242	192	182	171	159	143	123	101	56	233	
GP 520 / 24	15	20		253	201	190	178	166	149	128	105	59	242	
GP 520 / 25	15	20		263	209	197	186	173	156	134	109	61	251	

Paslanmaz Dalgıç Pompa / 520 Serisi
Stainless Steel Submersible Pumps / 520 Series 50HZ

Pompa Tipi Pumps Type	Güç Power		Debi / Flow								Pompa Ağırlık	Pompa Boy	Çıkış Out Inch	
			m³/h	0.0	14.0	16.0	18.0	20.0	22.0	24.0	26.0	Pump Weight		Pump length
	Kw	Hp	l/s	0.00	3.89	4.44	5.00	5.56	6.11	6.67	7.22	Kg		cm
GP 520 / 26	15	20	Basma Yüksekliği mSS / Head mSS	274	217	205	194	180	161	139	114	71	261	2½"
GP 520 / 27	18.5	25		284	226	213	202	186	167	145	119	74	270	
GP 520 / 28	18.5	25		295	234	221	209	193	174	150	123	76	279	
GP 520 / 29	18.5	25		306	242	229	216	200	180	156	127	78	288	
GP 520 / 30	18.5	25		316	251	337	224	207	185	161	132	81	297	
GP 520 / 31	18.5	25		327	259	245	231	214	191	166	136	83	306	
GP 520 / 32	18.5	25		336	268	254	237	221	198	171	141	85	315	
GP 520 / 33	22	30		346	276	262	245	228	204	176	145	88	324	
GP 520 / 34	22	30		356	284	270	253	235	210	181	149	90	333	
GP 520 / 35	22	30		366	292	278	261	242	215	186	153	92	342	
GP 520 / 36	22	30		376	300	286	269	250	221	190	158	94	352	
GP 520 / 37	22	30		386	308	294	277	257	226	195	162	97	361	
GP 520 / 38	22	30		396	316	302	285	264	232	200	166	99	370	
GP 520 / 39	30	40		406	324	310	293	271	238	205	170	101	379	
GP 520 / 40	30	40		416	332	318	301	278	243	210	174	104	388	
GP 520 / 41	30	40		426	340	326	309	286	249	214	179	106	397	
GP 520 / 42	30	40		436	348	334	317	293	254	219	183	108	406	
GP 520 / 43	30	40		446	356	342	325	300	260	224	187	111	415	
GP 520 / 44	30	40		456	364	350	333	307	266	229	191	113	424	
GP 520 / 45	30	40		466	372	358	341	314	271	234	195	115	433	
GP 520 / 46	30	40		476	380	366	349	322	277	238	200	117	443	
GP 520 / 47	30	40		486	388	374	357	329	282	243	204	120	452	
GP 520 / 48	30	40		496	396	382	365	336	288	248	208	122	461	
GP 520 / 49	30	40		506	404	390	373	343	294	253	212	124	470	
GP 520 / 50	30	40		516	412	398	381	350	299	258	216	127	479	

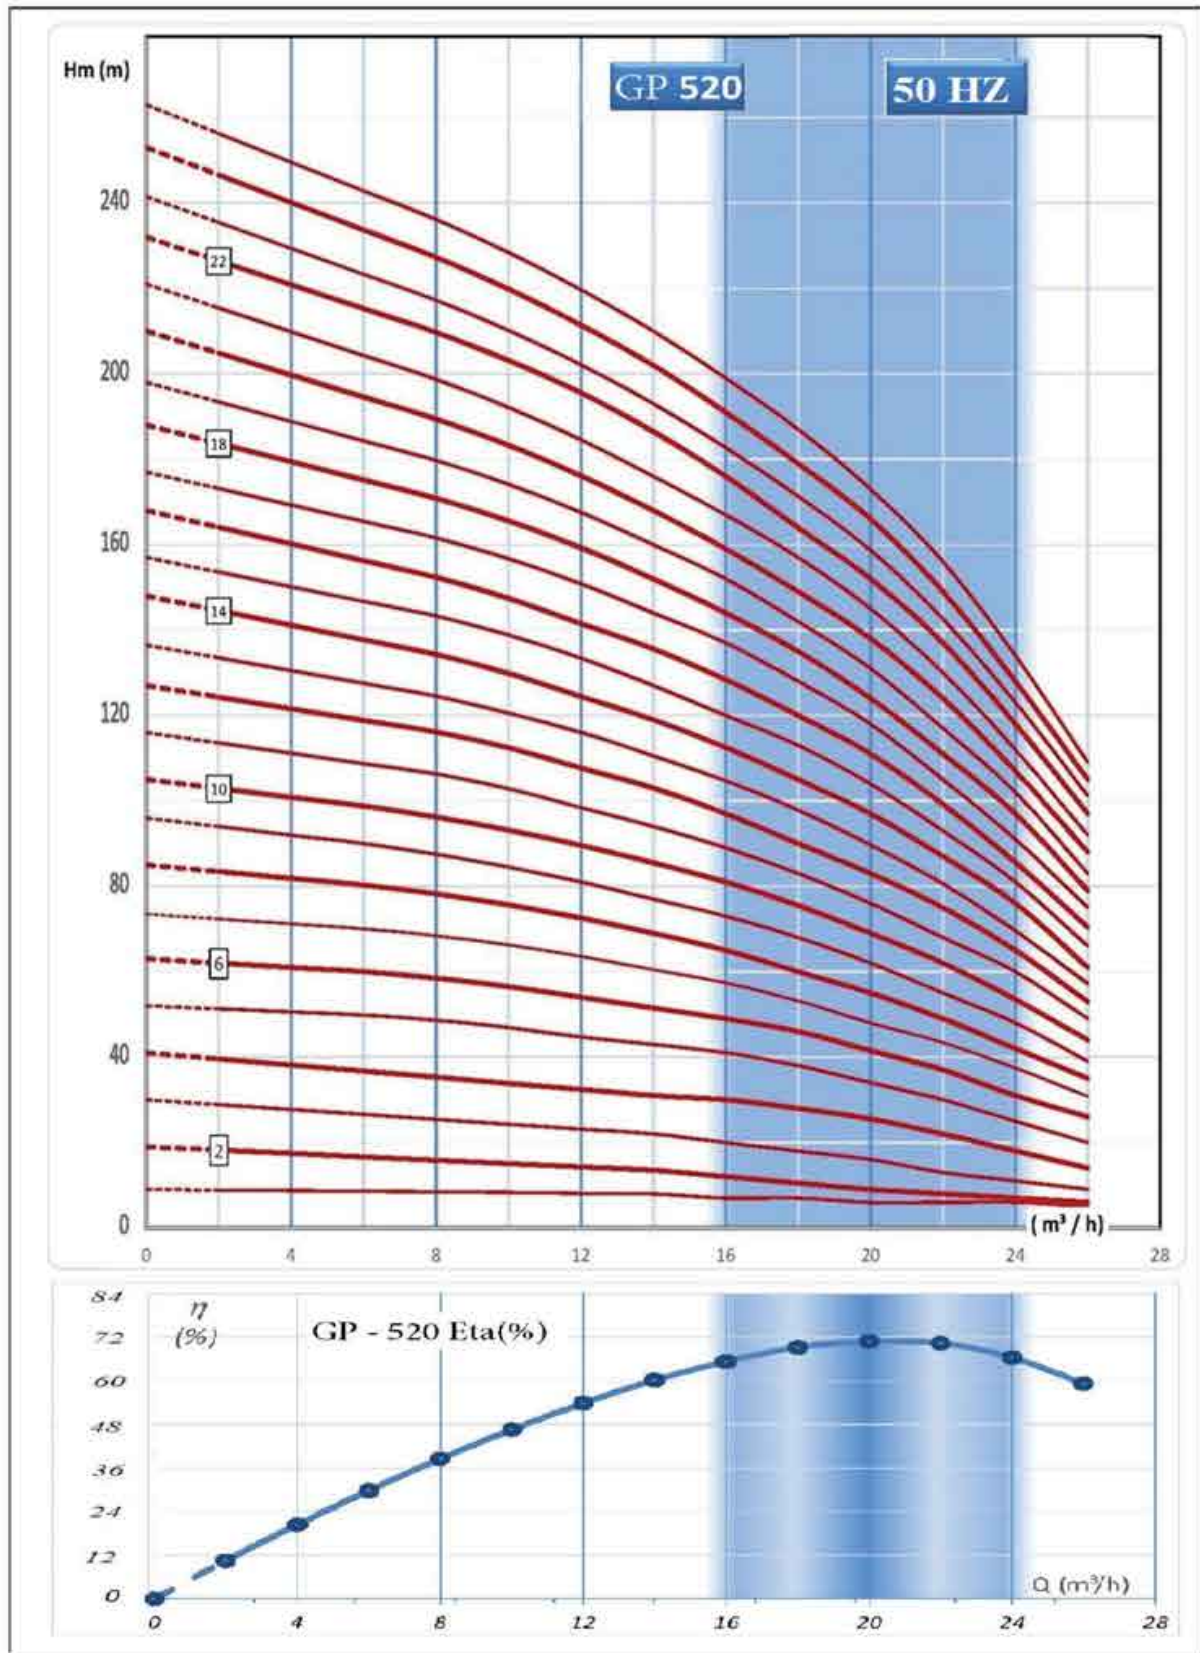

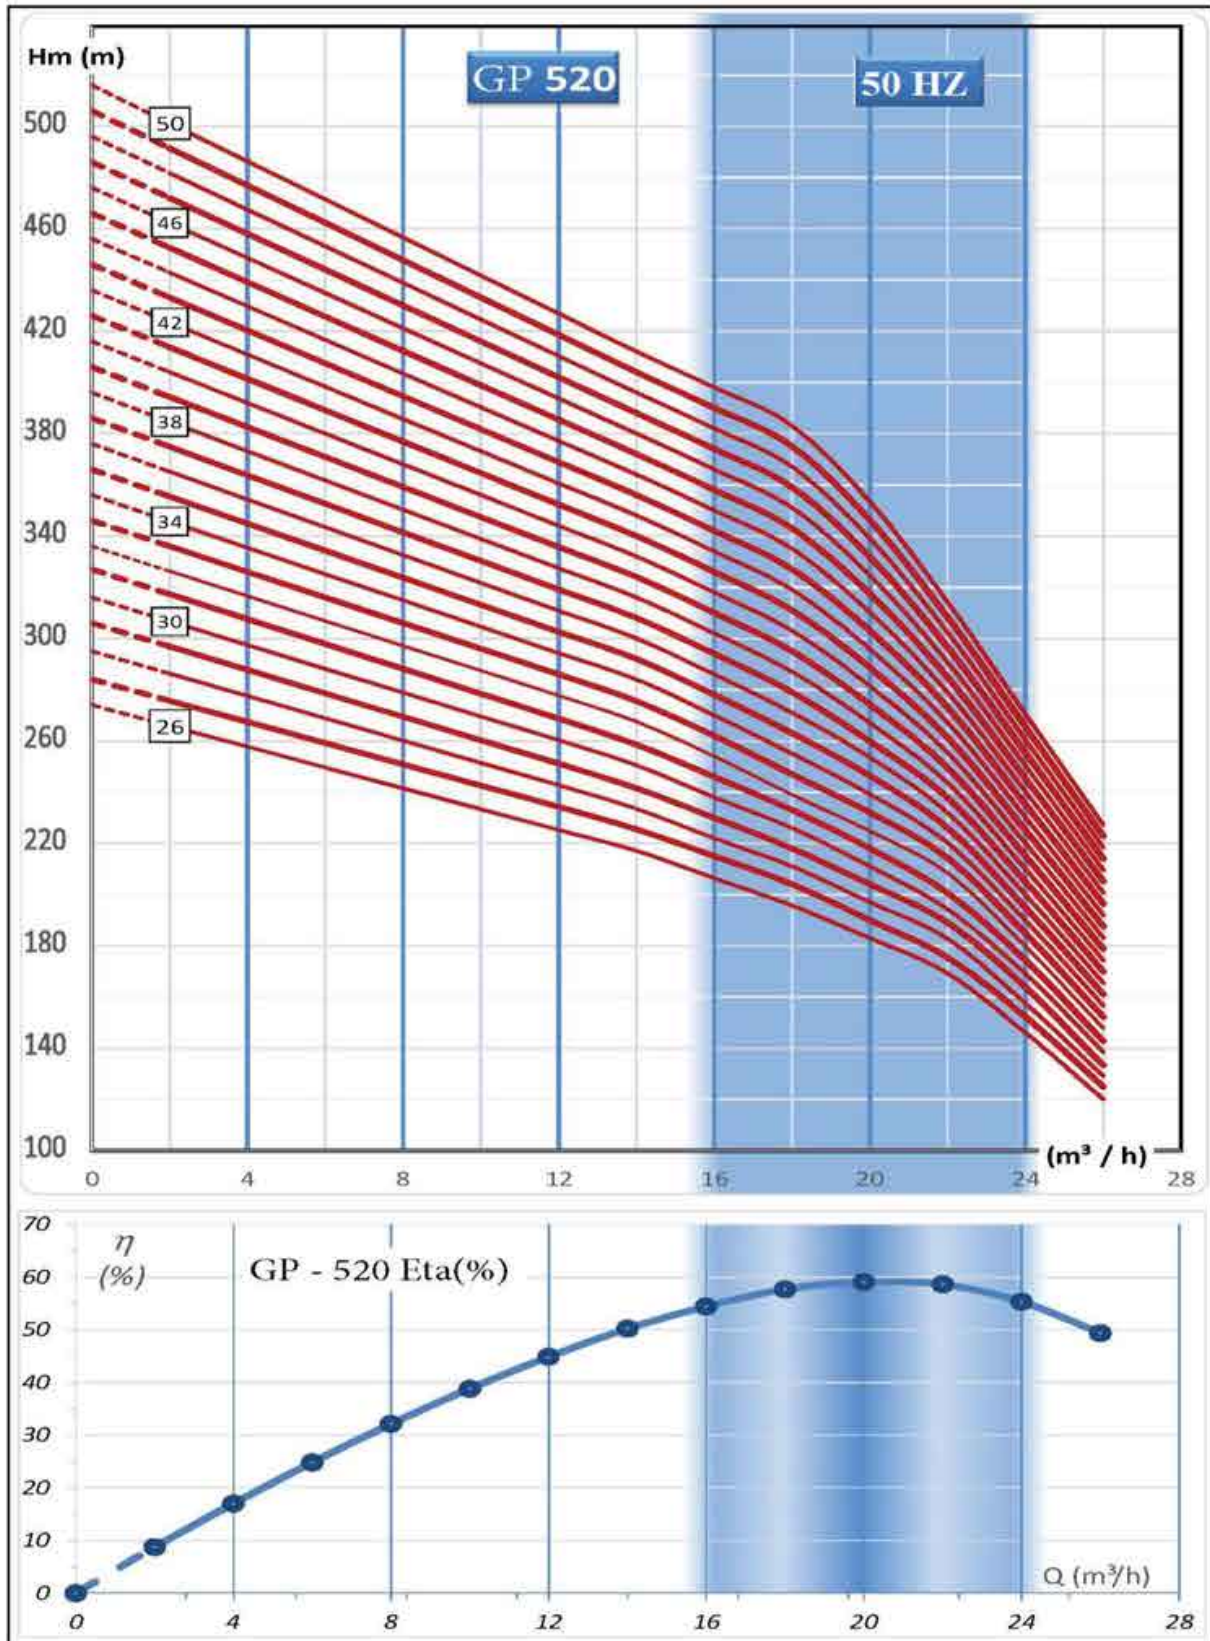

Paslanmaz Dalgıç Pompa / 530 Serisi
Stainless Steel Submersible Pumps / 530 Series **50HZ**


Pompa Tipi Pump Type	Güç Power		Debi / Flow								Pompa Ağırlık Pump Weight	Pompa Boy Pump length	Çıkış Out Inch
	Kw	Hp	m³/h	0.0	16.0	20.0	26.0	30.0	34.0	36.0			
			l/s	0.00	4.44	5.56	7.22	8.33	9.44	10.00			
GP 530 / 01	1.1	1.5	Basma Yüksekliği mSS / Head mSS	12	11	10	8	6	5	4	6	33	2 1/2"
GP 530 / 02	2.2	3		24	21	20	17	13	10	8	8	42	
GP 530 / 03	2.2	3		37	32	30	26	20	15	13	10	51	
GP 530 / 04	3	4		49	42	40	35	27	20	17	13	60	
GP 530 / 05	4	5.5		62	53	50	44	38	25	22	15	69	
GP 530 / 06	5.5	7.5		74	63	60	53	41	30	26	17	79	
GP 530 / 07	5.5	7.5		87	74	70	62	48	35	31	20	88	
GP 530 / 08	7.5	10		99	84	80	71	61	40	35	22	97	
GP 530 / 09	7.5	10		112	95	90	80	62	45	40	24	106	
GP 530 / 10	9.2	12.5		124	105	100	89	69	50	44	27	115	
GP 530 / 11	9.2	12.5		137	116	110	98	76	55	49	29	124	
GP 530 / 12	11	15		149	126	120	107	83	60	53	31	133	
GP 530 / 13	11	15		162	137	130	116	90	65	58	33	142	
GP 530 / 14	13	17.5		174	147	140	125	97	70	62	36	151	
GP 530 / 15	13	17.5		187	158	150	134	104	75	67	38	160	
GP 530 / 16	13	17.5		199	168	160	143	111	80	71	40	170	
GP 530 / 17	15	20		212	179	170	152	118	85	76	43	179	
GP 530 / 18	15	20		224	189	180	161	125	90	80	45	188	
GP 530 / 19	18.5	25		237	200	190	170	132	95	85	47	197	
GP 530 / 20	18.5	25		249	210	200	179	139	100	89	50	206	
GP 530 / 21	18.5	25		262	221	210	188	146	105	94	52	215	
GP 530 / 22	18.5	25		274	231	220	197	153	110	98	54	224	
GP 530 / 23	22	30		287	242	230	206	160	115	103	56	233	
GP 530 / 24	22	30		299	252	240	215	167	120	107	59	242	
GP 530 / 25	22	30		312	263	250	224	174	125	112	61	251	


Paslanmaz Dalgıç Pompa / 530 Serisi

Stainless Steel Submersible Pumps / 530 Series

50HZ

Pompa Tipi Pumps Type	Güç Power		Debi / Flow							Pompa Ağırlık Pump Weight	Pompa Boy Pump length	Çıkış Out	
	Kw	Hp	m³/h	0.0	16.0	20.0	26.0	30.0	34.0	36.0			
			l/s	0.00	4.44	5.56	7.22	8.33	9.44	10.00	Kg		cm
GP 530 / 26	22	30	Basma Yüksekliği mSS / Head mSS	324	273	260	233	181	130	116	71	261	2½"
GP 530 / 27	22	30		337	284	270	242	188	135	121	74	270	
GP 530 / 28	26	35		349	294	280	251	195	140	125	76	279	
GP 530 / 29	26	35		362	305	290	260	202	145	130	78	288	
GP 530 / 30	26	35		374	315	300	269	209	150	134	81	297	
GP 530 / 31	26	35		387	326	310	278	216	155	139	83	306	
GP 530 / 32	30	40		399	336	320	287	223	160	143	85	315	
GP 530 / 33	30	40		412	347	330	296	230	165	148	88	324	
GP 530 / 34	30	40		424	357	340	305	237	170	152	90	333	
GP 530 / 35	30	40		437	368	350	314	244	175	157	92	342	
GP 530 / 36	37	50		449	378	360	323	251	180	161	94	352	
GP 530 / 37	37	50		462	389	370	332	258	185	166	97	361	
GP 530 / 38	37	50		474	399	380	341	265	190	170	99	370	
GP 530 / 39	37	50		487	410	390	350	272	195	175	101	379	
GP 530 / 40	37	50		499	420	400	359	279	200	179	104	388	
GP 530 / 41	37	50		512	431	410	368	286	205	184	106	397	
GP 530 / 42	37	50		524	441	420	377	293	210	188	108	406	
GP 530 / 43	37	50		537	452	430	386	300	215	193	111	415	
GP 530 / 44	37	50		549	462	440	395	307	220	197	113	424	
GP 530 / 45	45	60		562	473	450	404	314	225	202	115	433	
GP 530 / 46	45	60		574	483	460	413	321	230	206	117	443	
GP 530 / 47	45	60		587	494	470	422	328	235	211	120	452	
GP 530 / 48	45	60		599	504	480	431	335	240	215	122	461	
GP 530 / 49	45	60		612	515	490	440	342	245	220	124	470	
GP 530 / 50	45	60		624	525	500	449	349	250	224	127	479	

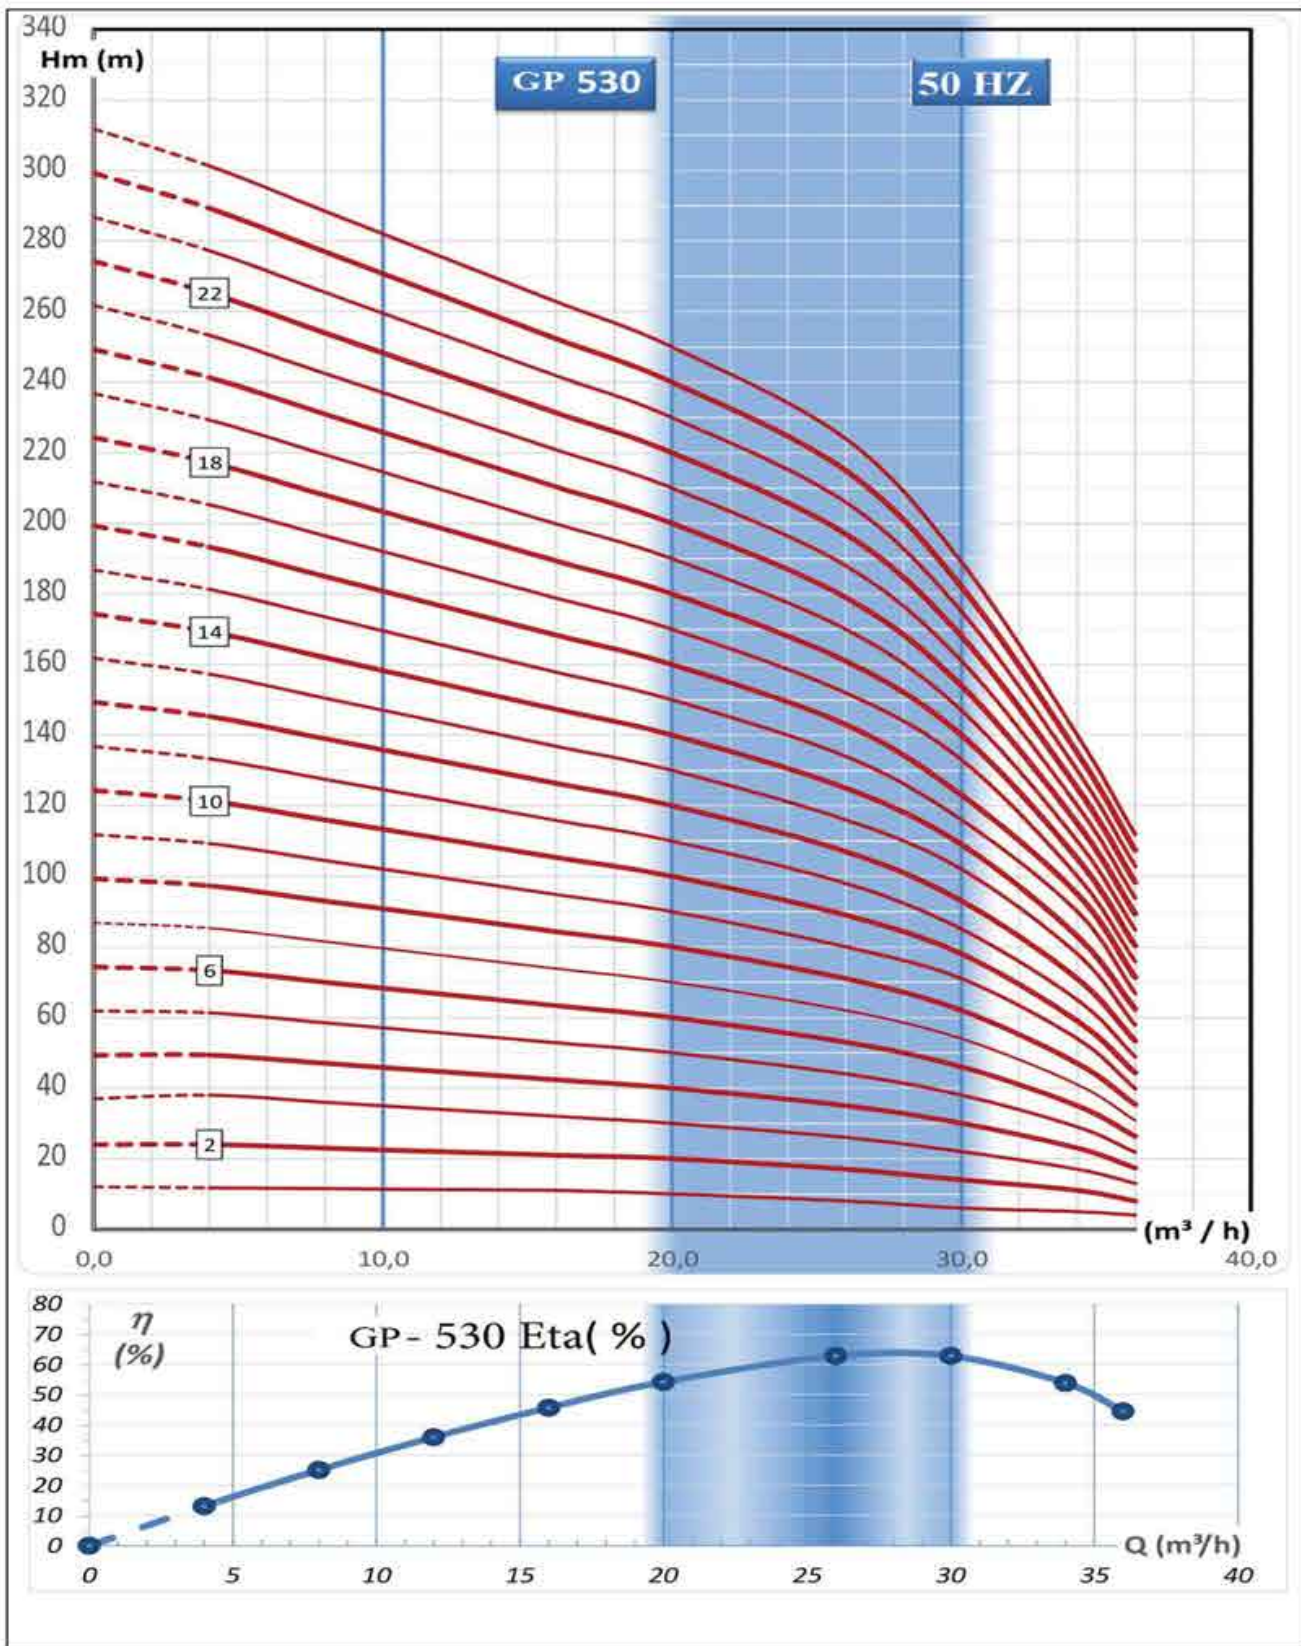

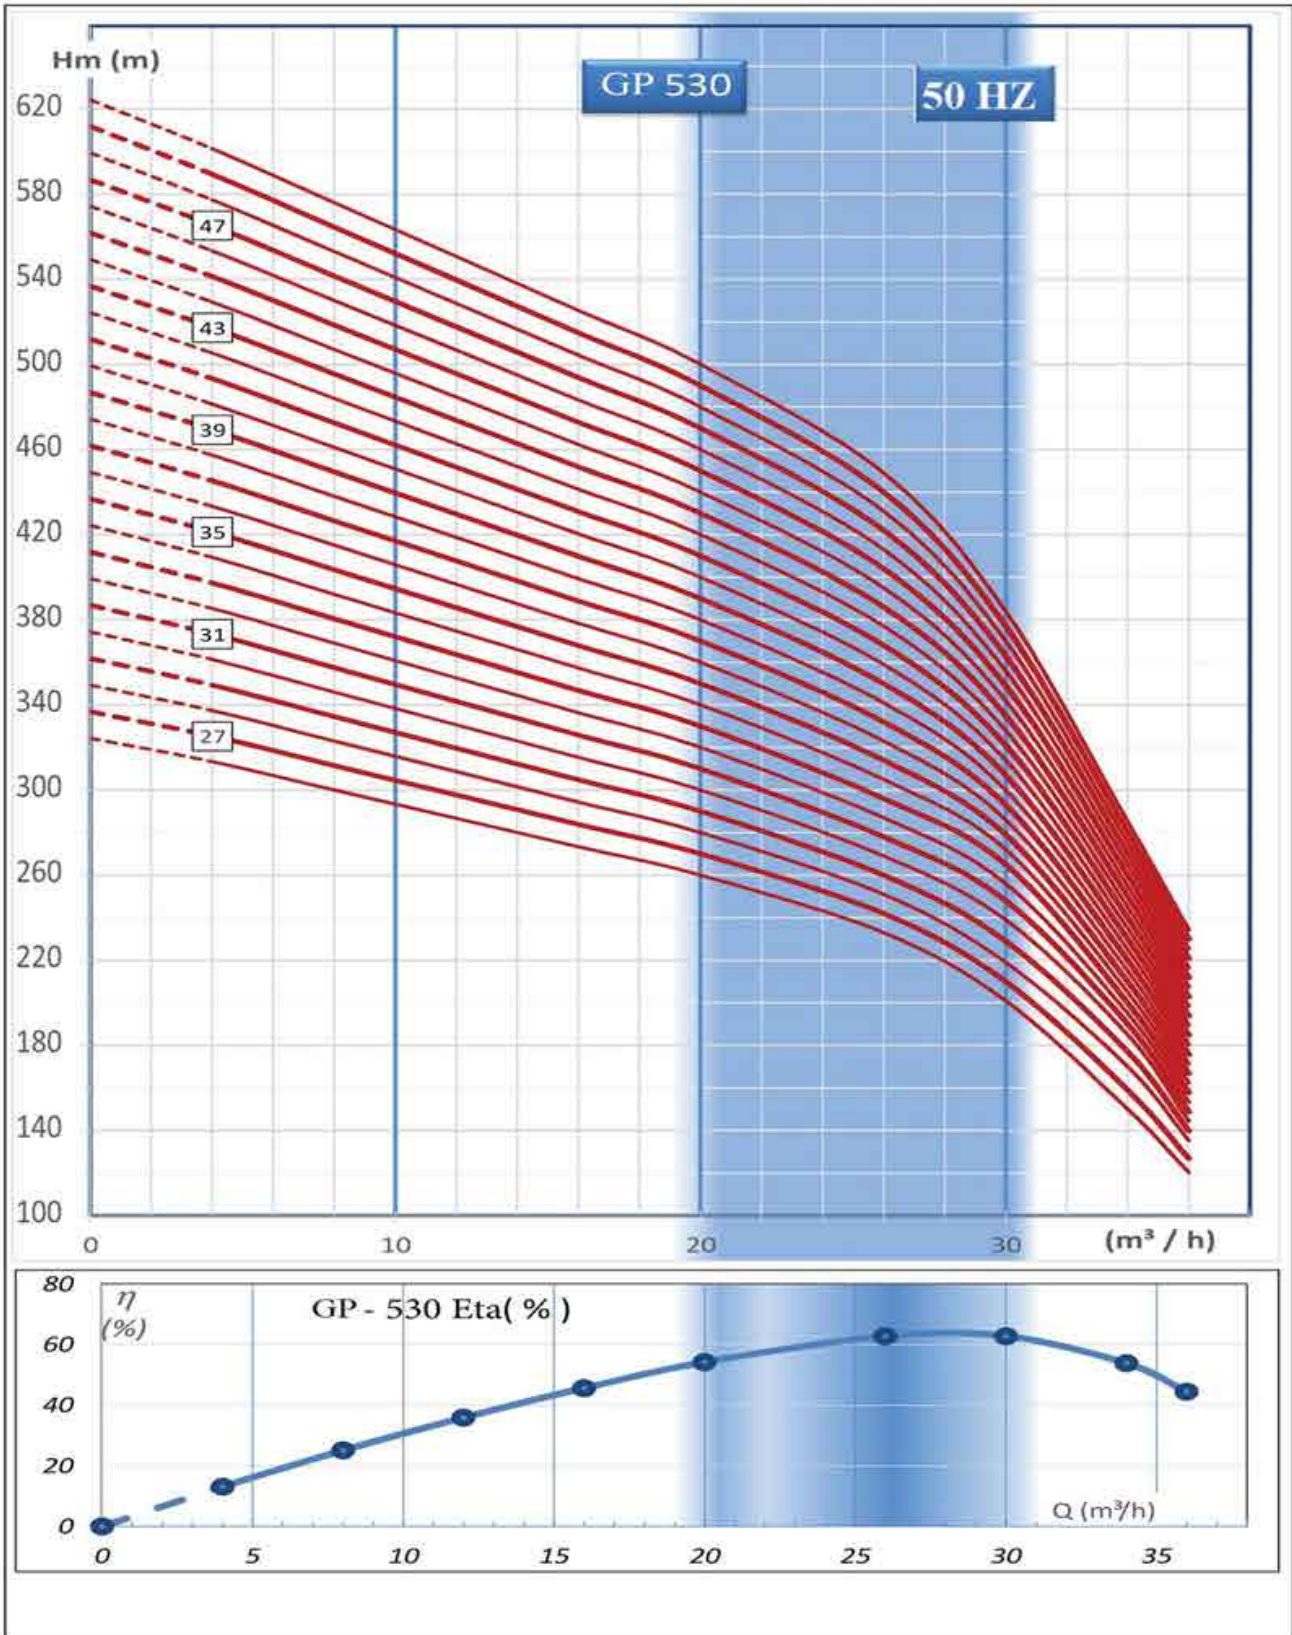

GOLD

Dalgıç Pompa Submersible Pump





Paslanmaz Dalgıç Pompa / 610 Serisi
Stainless Steel Submersible Pumps / 610 Series 50HZ

Pompa Tipi Pumps Type	Güç Power		Debi / Flow					Pompa Ağırlık	Pompa Boy	Çıkış Out Inch	
	Kw	Hp	m³/h	0.0	3.0	6.0	9.0	12.0	Pump Weight		Pump length
			l/s	0.00	0.83	1.67	2.50	3.33	Kg		cm
GP 610 / 01	0.55	0.75	Basma Yüksekliği mSS / Head mSS	9	8	7	5	3	5	29	2"
GP 610 / 02	0.75	1		17	16	14	10	6	6	34	
GP 610 / 03	0.75	1		26	24	21	16	9	8	39	
GP 610 / 04	1.1	1.5		35	32	28	21	12	9	44	
GP 610 / 05	1.5	2		44	39	35	26	15	10	49	
GP 610 / 06	2.2	3		52	47	43	31	18	11	55	
GP 610 / 07	2.2	3		61	55	50	36	21	12	60	
GP 610 / 08	2.2	3		70	63	57	41	23	14	65	
GP 610 / 09	3	4		79	71	64	47	26	15	70	
GP 610 / 10	3	4		87	97	71	52	29	16	75	
GP 610 / 11	3	4		96	87	78	57	32	17	80	
GP 610 / 12	4	5.5		105	94	85	62	35	18	85	
GP 610 / 13	4	5.5		113	102	92	67	38	20	90	
GP 610 / 14	4	5.5		122	110	99	73	41	21	95	
GP 610 / 15	4	5.5		131	118	106	78	44	22	100	
GP 610 / 16	5.5	7.5		140	126	113	83	47	23	106	
GP 610 / 17	5.5	7.5		148	134	121	88	50	24	111	
GP 610 / 18	5.5	7.5		157	142	128	93	52	26	116	
GP 610 / 19	5.5	7.5		166	149	135	98	55	27	121	
GP 610 / 20	5.5	7.5		175	157	142	104	58	28	126	
GP 610 / 21	5.5	7.5		183	165	149	109	61	29	131	
GP 610 / 22	7.5	10		192	173	156	114	64	30	136	
GP 610 / 23	7.5	10		201	181	163	119	67	32	141	
GP 610 / 24	7.5	10		209	189	170	124	70	33	146	
GP 610 / 25	7.5	10		218	197	177	130	73	34	151	
GP 610 / 26	7.5	10		227	204	184	135	76	35	157	
GP 610 / 27	7.5	10		236	212	191	140	79	36	162	
GP 610 / 28	7.5	10		244	220	199	145	81	38	167	
GP 610 / 29	9.2	12.5		253	228	206	150	84	39	172	
GP 610 / 30	9.2	12.5		262	236	213	155	87	40	177	

Paslanmaz Dalgıç Pompa / 610 Serisi
Stainless Steel Submersible Pumps / 610 Series 50HZ

Pompa Tipi Pumps Type	Güç Power		Debi / Flow					Pompa Ağırlık	Pompa Boy	Çıkış Out Inch	
	Kw	Hp	m³/h	0.0	3.0	6.0	9.0	12.0	Pump Weight		Pump length
			l/s	0.00	0.83	1.67	2.60	3.33	Kg		cm
GP 610 / 31	9.2	12.5	Basma Yüksekliği mSS / Head mSS	271	244	220	161	90	41	182	2"
GP 610 / 32	9.2	12.5		279	252	227	166	93	42	187	
GP 610 / 33	9.2	12.5		288	259	234	171	96	44	192	
GP 610 / 34	9.2	12.5		297	267	241	176	99	45	197	
GP 610 / 35	9.2	12.5		305	275	248	181	102	46	202	
GP 610 / 36	11	15		314	283	255	187	105	47	208	
GP 610 / 37	11	15		323	291	262	192	108	48	213	
GP 610 / 38	11	15		332	299	269	197	110	50	218	
GP 610 / 39	11	15		340	307	277	202	113	51	223	
GP 610 / 40	11	15		349	314	284	207	116	52	228	
GP 610 / 41	11	15		358	322	291	212	119	53	233	
GP 610 / 42	13	17.5		367	330	298	218	122	54	238	
GP 610 / 43	13	17.5		375	338	305	223	125	56	243	
GP 610 / 44	13	17.5		384	346	312	228	118	57	248	
GP 610 / 45	13	17.5		393	354	319	233	131	58	253	
GP 610 / 46	13	17.5		402	362	326	238	134	59	259	
GP 610 / 47	13	17.5		410	370	333	244	137	60	264	
GP 610 / 48	13	17.5		419	377	340	249	139	62	269	
GP 610 / 49	15	20		428	385	347	254	142	63	274	
GP 610 / 50	15	20		436	393	355	259	145	64	279	
GP 610 / 51	15	20		445	401	362	264	148	65	284	
GP 610 / 52	15	20		454	409	369	269	151	66	289	
GP 610 / 53	15	20		463	417	376	275	154	67	294	
GP 610 / 54	15	20		471	425	383	280	157	69	299	
GP 610 / 55	15	20		480	432	390	285	160	70	304	
GP 610 / 56	15	20		489	440	397	290	163	71	310	
GP 610 / 57	18.5	25		498	448	404	295	166	72	315	
GP 610 / 58	18.5	25		506	456	411	300	168	73	320	
GP 610 / 59	18.5	25		515	464	418	306	171	75	325	
GP 610 / 60	18.5	25		524	472	425	311	174	76	330	

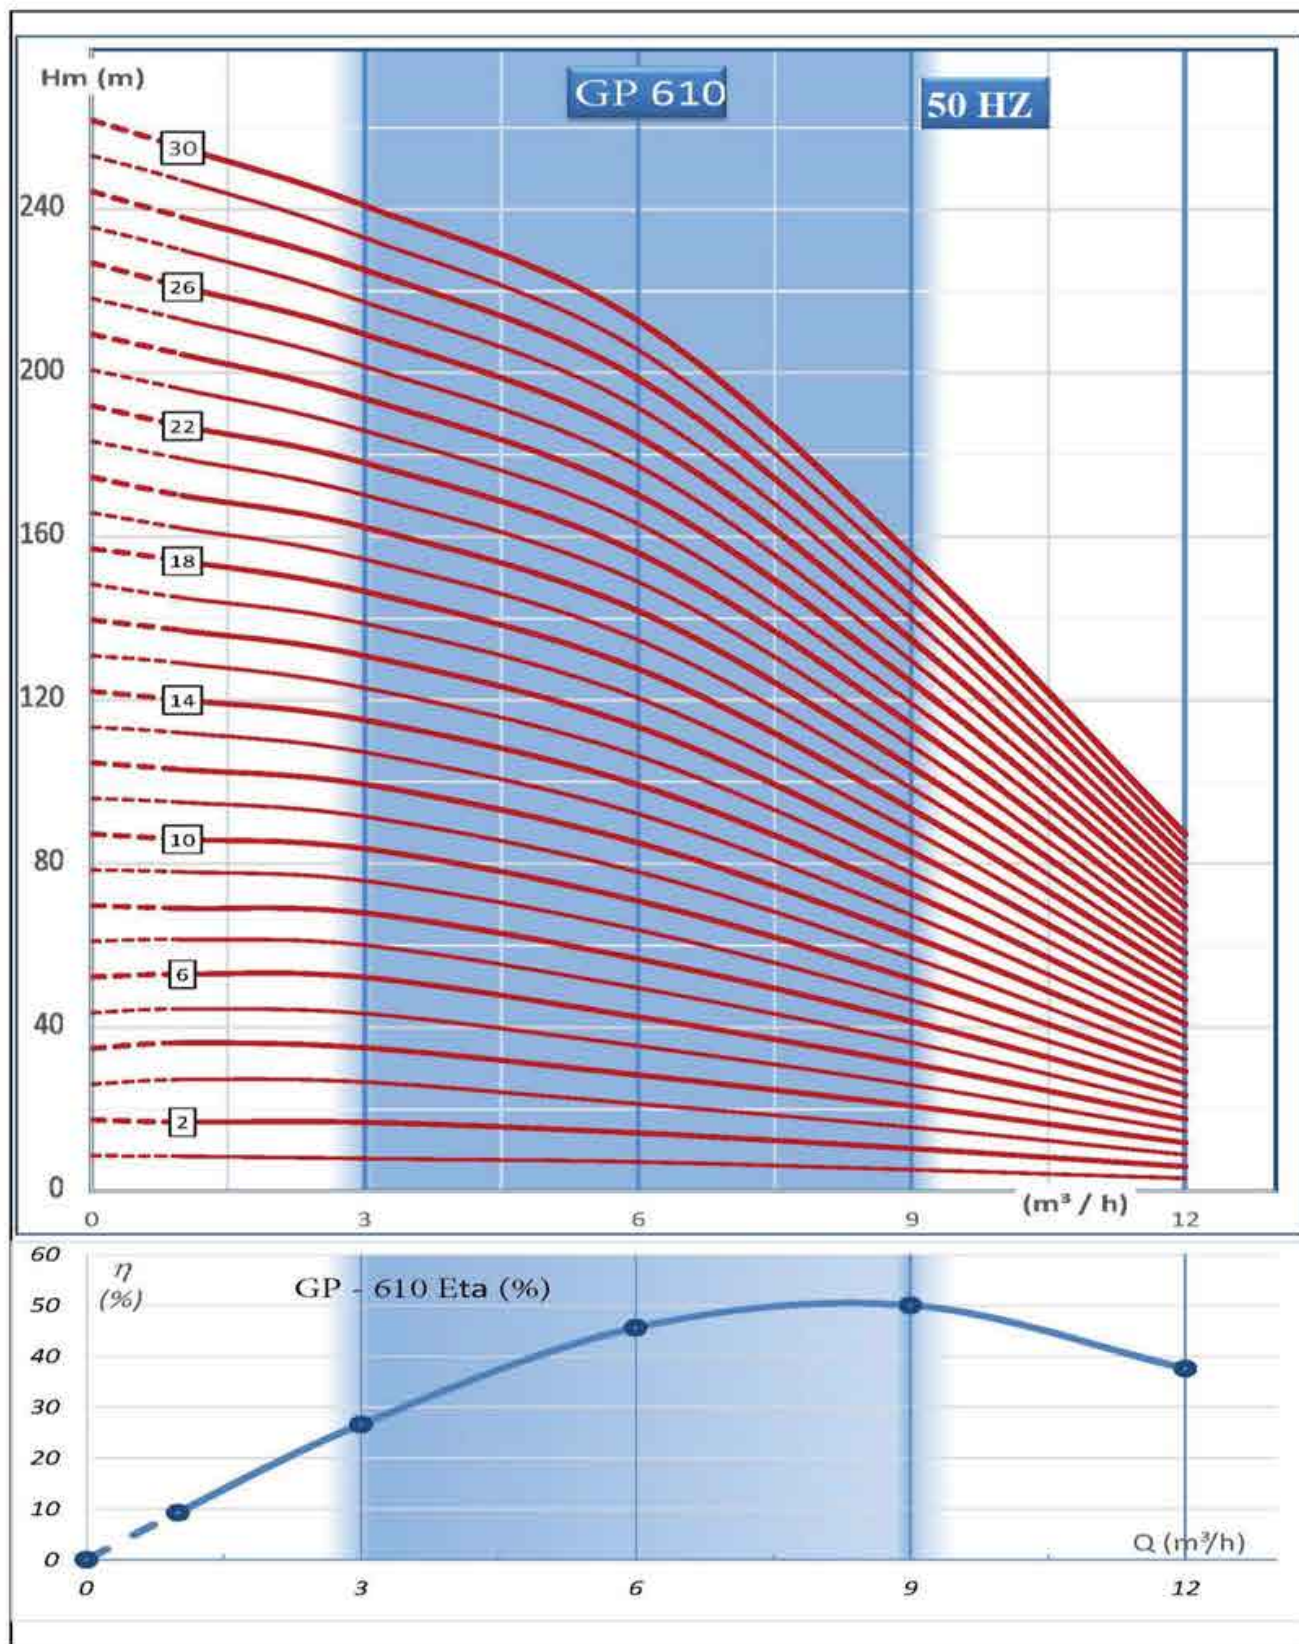

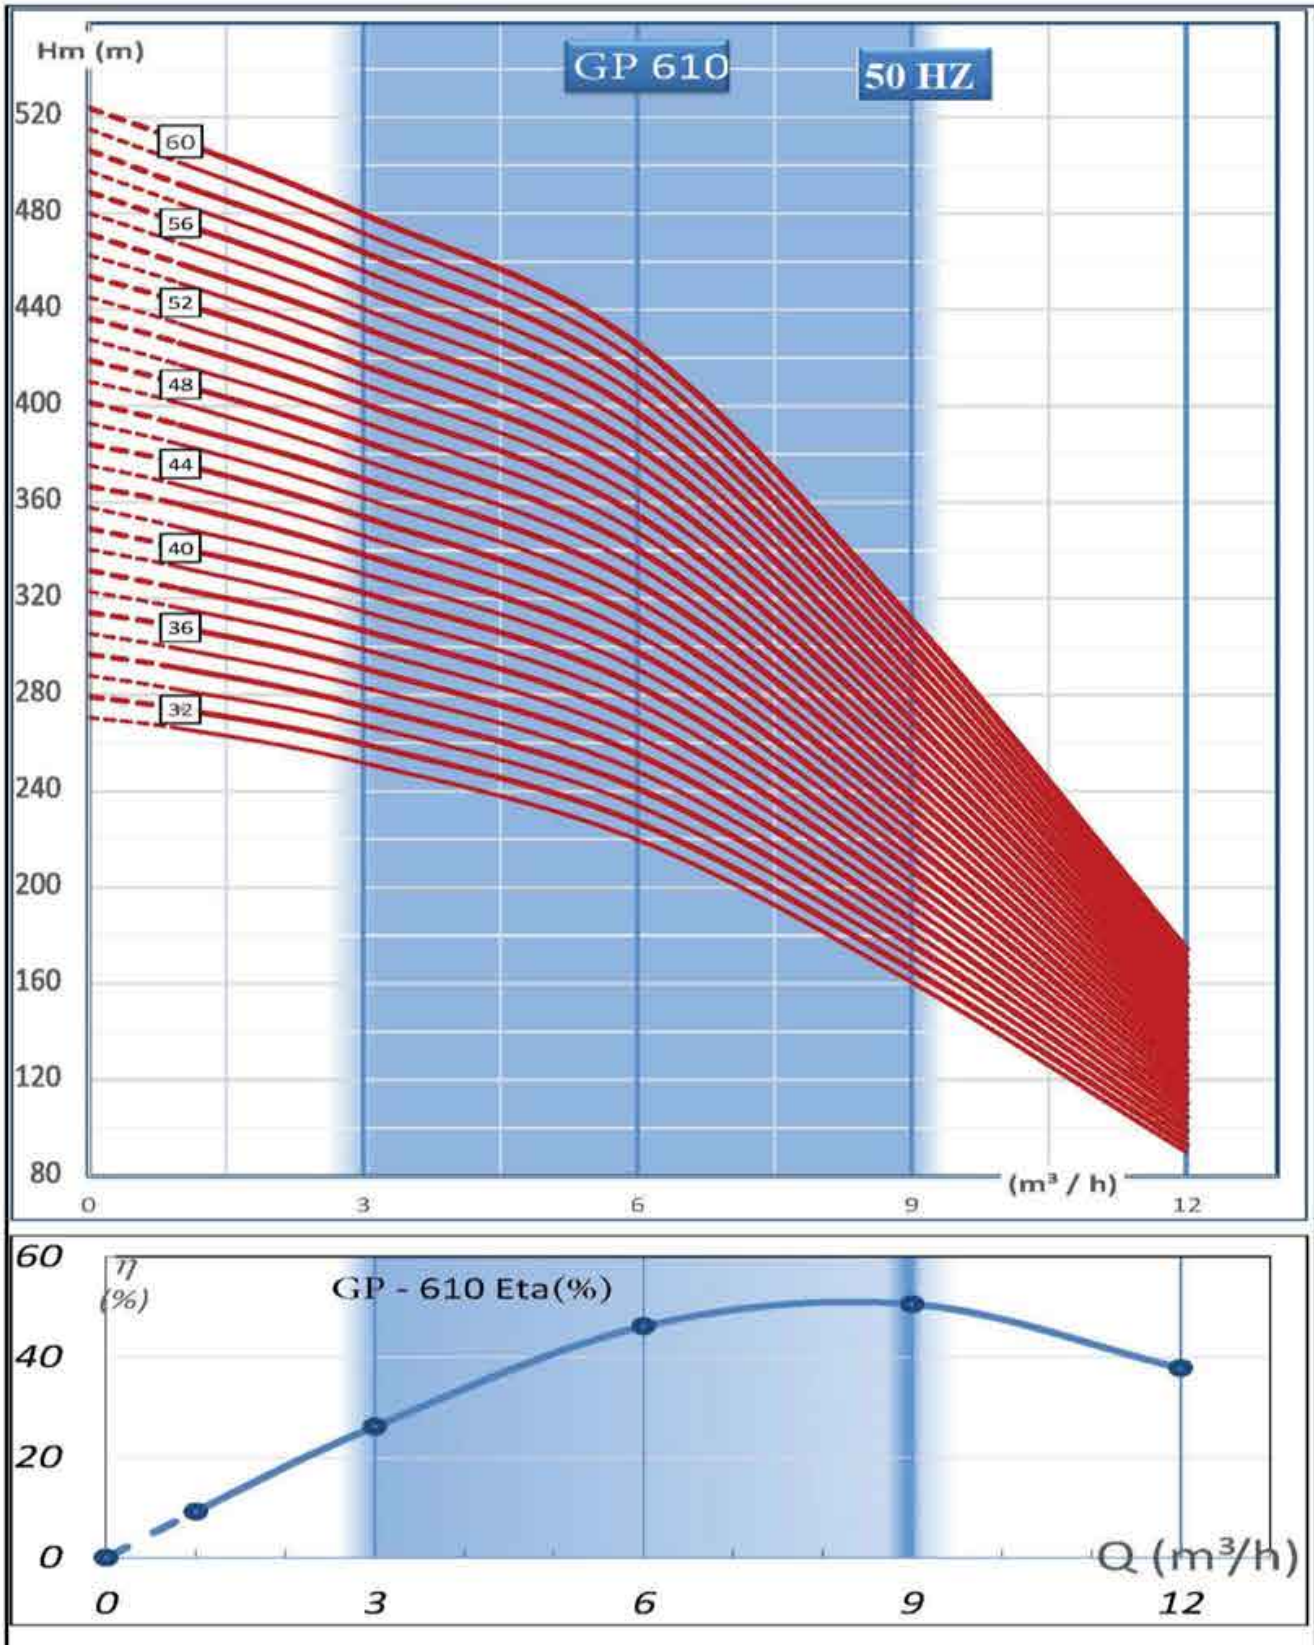


Paslanmaz Dalgıç Pompa / 617 Serisi


Stainless Steel Submersible Pumps / 617 Series 50HZ

Pompa Tipi Pumps Type	Güç Power		Debi / Flow										Pompa Ağırlık	Pompa Boy	Çıkış Out Inch
			m³/h	0.0	10.0	12.0	14.0	15.0	16.0	17.0	18.0	20.0	Pump Weight	Pump length	
	l/s	0.00	2.78	3.33	3.89	4.17	4.44	4.72	5.00	5.56	Kg	cm			
GP 617 / 01	0.55	0.75	Basma Yüksekliği mSS / Head mSS	12	11	10	9	8	7	6	5	4	5	30	2½"
GP 617 / 02	1.1	1.5		23	20	19	16	15	14	13	12	11	6	36	
GP 617 / 03	1.5	2		34	31	29	25	23	22	21	20	16	8	42	
GP 617 / 04	2.2	3		45	41	39	33	30	29	28	27	21	9	48	
GP 617 / 05	2.2	3		56	52	49	41	38	36	35	33	27	10	54	
GP 617 / 06	3	4		68	63	60	49	46	43	42	40	32	11	61	
GP 617 / 07	4	5.5		79	73	69	57	53	50	49	47	37	12	67	
GP 617 / 08	4	5.5		90	84	80	66	61	58	56	54	43	14	73	
GP 617 / 09	4	5.5		102	94	90	74	68	65	62	60	48	15	79	
GP 617 / 10	5.5	7.5		112	104	99	82	76	72	69	67	53	16	85	
GP 617 / 11	5.5	7.5		125	116	111	90	83	79	76	74	58	17	91	
GP 617 / 12	5.5	7.5		135	127	120	98	91	86	83	80	64	18	97	
GP 617 / 13	7.5	10		146	137	130	106	99	93	90	87	69	20	103	
GP 617 / 14	7.5	10		158	147	141	115	106	101	97	94	74	21	109	
GP 617 / 15	7.5	10		169	158	151	123	114	108	104	100	80	22	115	
GP 617 / 16	7.5	10		180	168	160	131	121	115	111	107	85	23	122	
GP 617 / 17	9.2	12.5		190	178	169	139	129	122	118	114	90	24	128	
GP 617 / 18	9.2	12.5		203	190	181	147	136	129	125	121	95	26	134	
GP 617 / 19	9.2	12.5		214	199	190	155	144	136	131	127	101	27	140	
GP 617 / 20	9.2	12.5		224	210	200	164	152	144	138	134	106	28	146	
GP 617 / 21	11	15		236	222	211	172	159	151	145	141	111	29	152	
GP 617 / 22	11	15		247	231	220	180	167	158	152	147	117	30	158	
GP 617 / 23	11	15		258	241	230	188	174	165	159	154	122	32	164	
GP 617 / 24	11	15		269	251	240	196	182	172	166	161	127	33	170	
GP 617 / 25	13	17.5		281	264	251	205	189	180	173	167	133	34	176	
GP 617 / 26	13	17.5		292	273	260	213	197	187	180	174	138	35	183	
GP 617 / 27	13	17.5		303	283	270	221	205	194	187	181	143	36	189	
GP 617 / 28	13	17.5		316	297	283	229	212	201	194	188	149	38	195	
GP 617 / 29	15	20		326	306	293	237	220	208	200	194	154	39	201	
GP 617 / 30	15	20		338	316	302	245	227	215	207	201	159	40	207	

Paslanmaz Dalgıç Pompa / 617 Serisi
Stainless Steel Submersible Pumps / 617 Series 50HZ

Pompa Tipi Pump Type	Güç Power			Debi / Flow									Pompa Ağırlık	Pompa Boy	Çıkış Out Inch	
	Kw	Hp		m³/h	0.0	10.0	12.0	14.0	15.0	16.0	17.0	18.0	20.0	Pump Weight		Pump length
				l/s	0.00	2.78	3.33	3.89	4.17	4.44	4.72	5.00	5.56	Kg		cm
GP 617 / 31	15	20	Basma Yüksekliği mSS / Head mSS	348	327	311	254	235	223	214	208	164	41	213	2½"	
GP 617 / 32	15	20		359	337	321	262	242	230	221	214	170	42	219		
GP 617 / 33	15	20		370	347	329	270	250	237	228	221	175	44	225		
GP 617 / 34	18.5	25		381	357	337	278	258	244	235	228	180	45	231		
GP 617 / 35	18.5	25		392	367	345	286	265	251	242	234	186	46	237		
GP 617 / 36	18.5	25		403	377	353	295	273	259	249	241	191	47	244		
GP 617 / 37	22	30		414	387	361	303	280	266	256	248	196	48	250		
GP 617 / 38	22	30		425	397	369	311	288	273	263	255	202	50	256		
GP 617 / 39	22	30		436	407	377	319	295	280	269	261	207	51	262		
GP 617 / 40	22	30		447	417	385	327	303	287	276	268	212	52	268		
GP 617 / 41	22	30		458	427	393	335	311	294	283	275	217	53	274		
GP 617 / 42	22	30		469	437	401	344	318	302	290	281	223	54	280		
GP 617 / 43	26	35		480	447	409	352	326	309	297	288	228	56	286		
GP 617 / 44	26	35		491	457	417	360	333	316	304	295	233	57	292		
GP 617 / 45	26	35		502	467	425	368	341	323	311	301	239	58	298		
GP 617 / 46	26	35		513	477	433	376	348	330	318	308	244	59	305		
GP 617 / 47	26	35		524	487	441	385	356	338	325	315	249	60	311		
GP 617 / 48	26	35		535	497	449	393	364	345	332	322	255	62	317		
GP 617 / 49	26	35		546	507	457	401	371	352	338	328	260	63	323		
GP 617 / 50	26	35		557	517	465	409	379	359	345	335	265	64	329		
GP 617 / 51	35	40		568	527	473	417	386	366	352	342	270	65	335		
GP 617 / 52	35	40		579	537	481	425	394	373	359	348	276	66	341		
GP 617 / 53	35	40		590	547	489	434	401	381	366	355	281	67	347		
GP 617 / 54	35	40		601	557	497	442	409	388	373	362	286	69	353		
GP 617 / 55	35	40		612	567	505	450	417	395	380	368	292	70	359		
GP 617 / 56	37	50		623	577	513	458	424	402	387	375	297	71	365		
GP 617 / 57	37	50		634	587	521	466	432	409	394	382	302	72	372		
GP 617 / 58	37	50		645	597	529	475	439	417	401	389	308	73	378		
GP 617 / 59	37	50		656	607	537	483	447	424	407	395	313	75	384		
GP 617 / 60	37	50		667	617	545	491	454	431	414	402	318	76	390		

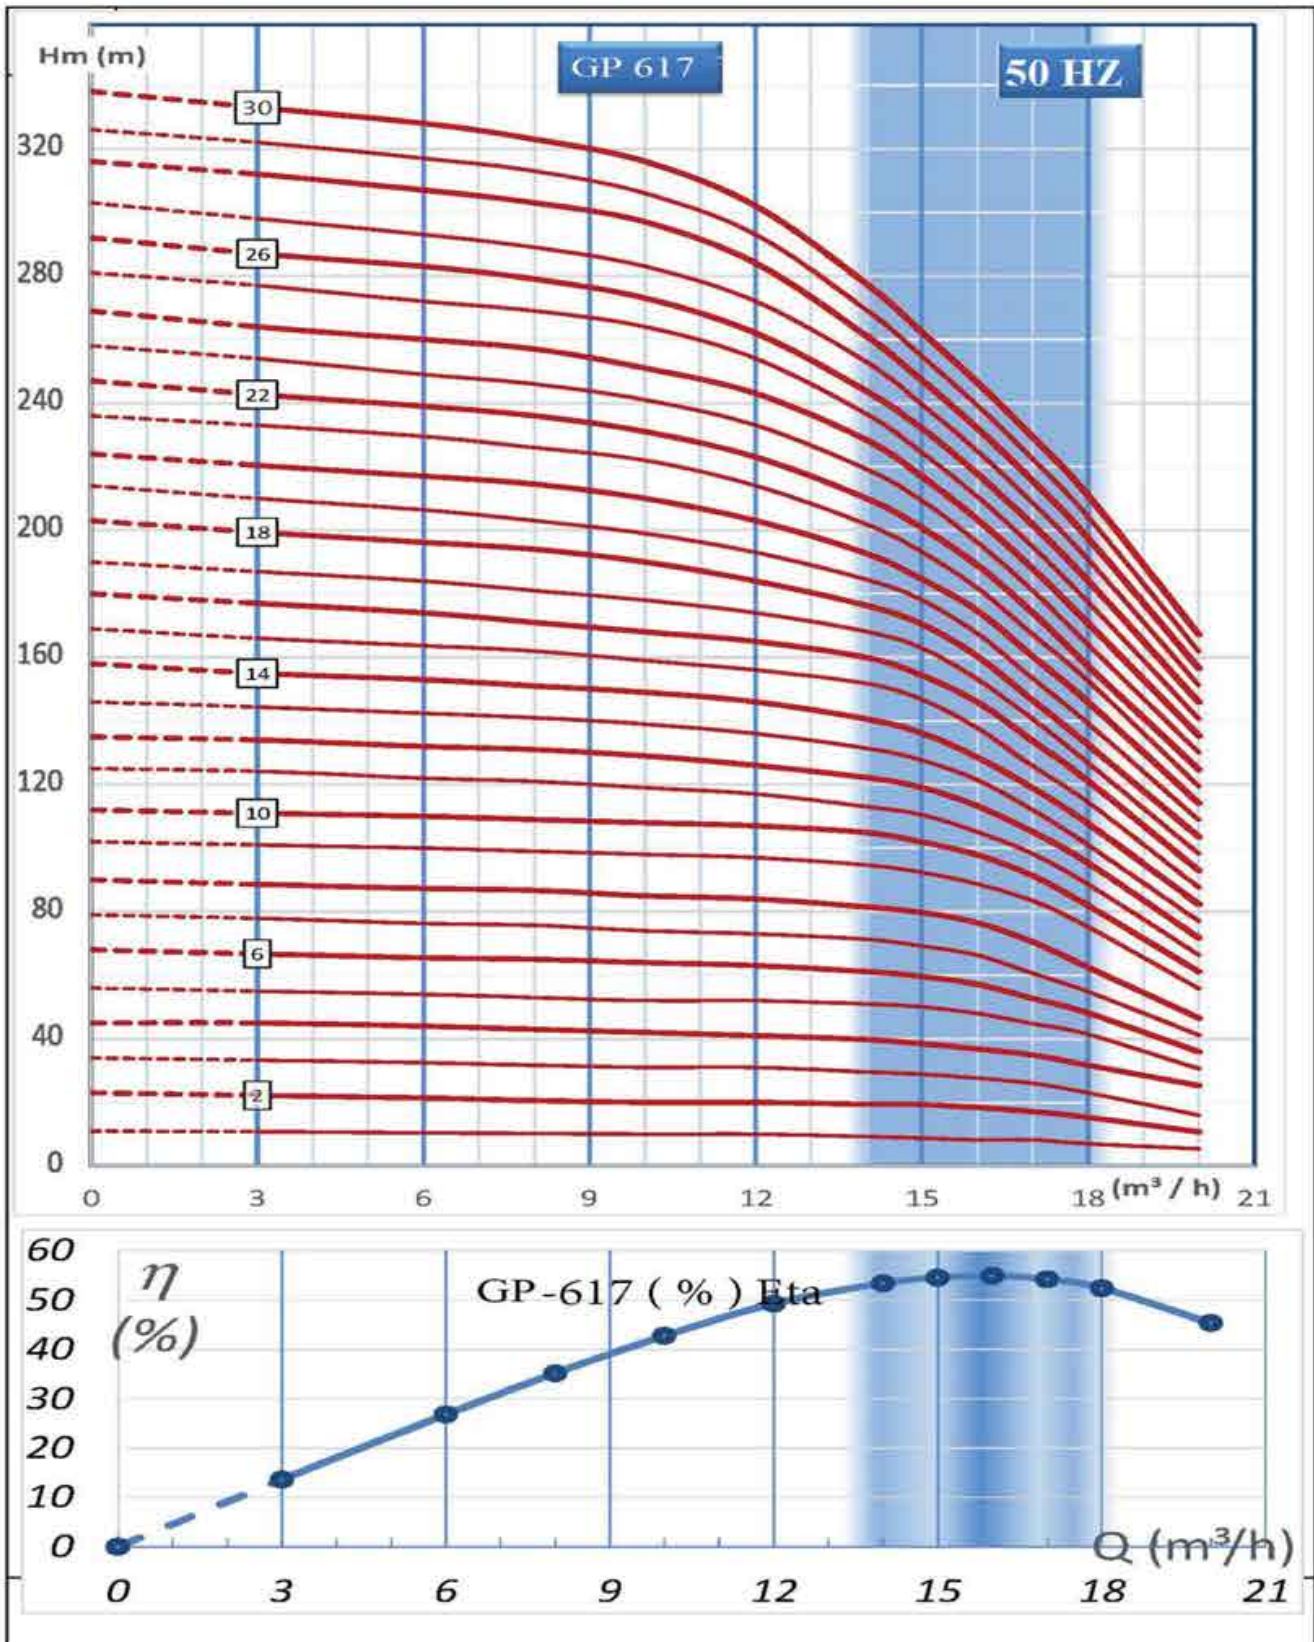


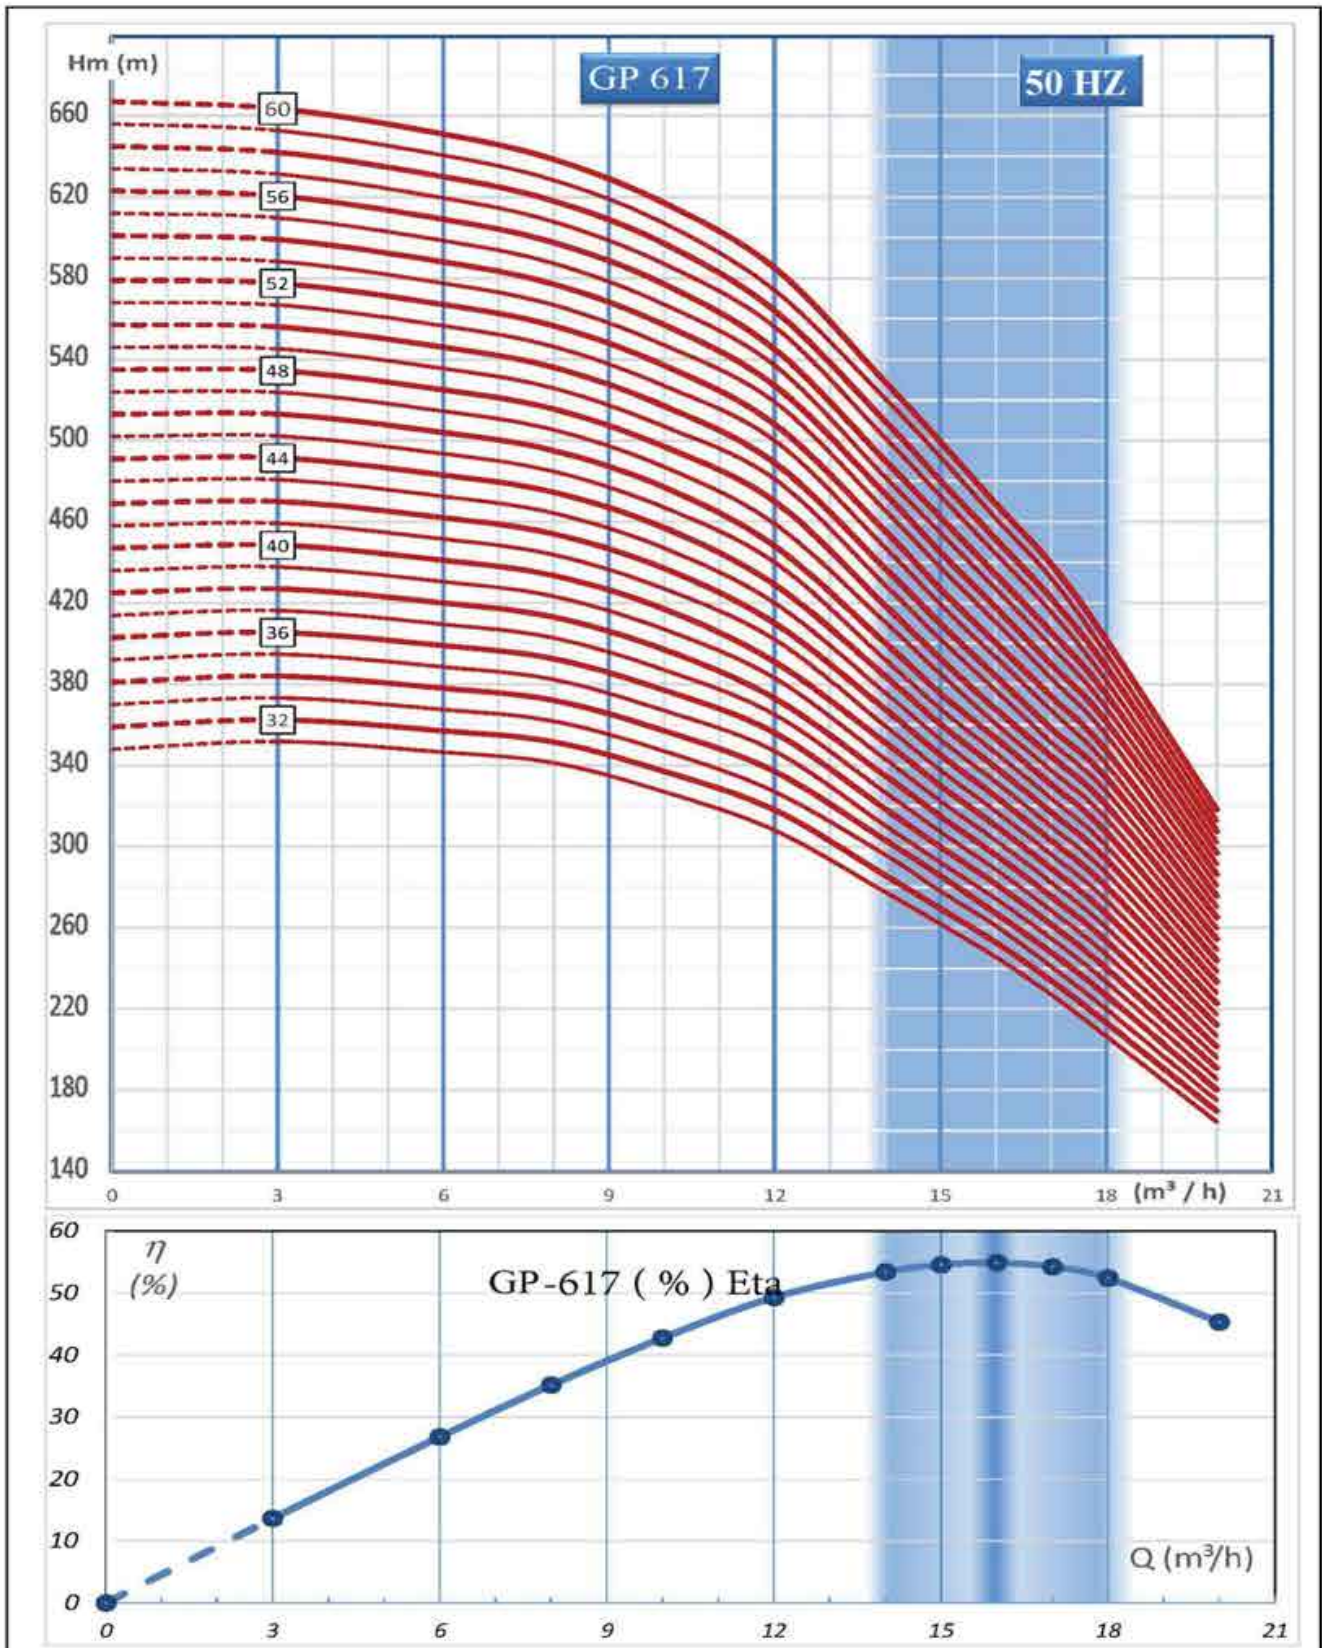



Paslanmaz Dalgıç Pompa / 620 Serisi
Stainless Steel Submersible Pumps / 620 Series 50HZ

Pompa Tipi Pump Type	Güç Power		Debi / Flow								Pompa Ağırlık	Pompa Boy	Çıkış Out Inch	
	Kw	Hp	m³/h	0.0	14.0	16.0	18.0	20.0	22.0	24.0	26.0	Pump Weight		Pump length
			l/s	0.00	3.89	4.44	5.00	5.56	6.11	6.67	7.22	Kg		cm
GP 620 / 01	0.75	1	Basma Yüksekliği mSS / Head mSS	10	9	8	7	6	5	4	3	6	34	2½"
GP 620 / 02	1.5	2		18	13	12	11	9	8	7	6	8	43	
GP 620 / 03	2.2	3		34	28	26	25	23	22	20	17	10	53	
GP 620 / 04	3	4		44	37	35	34	31	29	26	23	13	62	
GP 620 / 05	4	5.5		55	46	44	42	39	37	33	29	15	72	
GP 620 / 06	4	5.5		66	55	53	50	46	44	39	35	17	82	
GP 620 / 07	5.5	7.5		76	64	61	59	54	51	46	40	20	91	
GP 620 / 08	5.5	7.5		87	73	70	67	62	59	52	46	22	101	
GP 620 / 09	7.5	10		97	83	79	75	69	66	59	52	24	110	
GP 620 / 10	7.5	10		108	92	88	84	77	73	66	58	27	120	
GP 620 / 11	7.5	10		119	101	97	92	85	81	72	64	29	130	
GP 620 / 12	9.2	12.5		129	110	105	101	93	88	79	69	31	139	
GP 620 / 13	9.2	12.5		140	119	114	109	100	95	85	75	33	149	
GP 620 / 14	9.2	12.5		151	128	123	117	108	103	92	81	36	158	
GP 620 / 15	11	15		161	138	132	126	116	110	98	87	38	168	
GP 620 / 16	11	15		172	147	140	134	124	117	105	92	40	178	
GP 620 / 17	11	15		182	156	149	143	131	125	111	98	43	187	
GP 620 / 18	13	17.5		193	165	158	151	139	132	118	104	45	197	
GP 620 / 19	13	17.5		204	174	167	159	147	139	125	110	47	206	
GP 620 / 20	13	17.5		214	183	176	168	154	147	131	116	50	216	
GP 620 / 21	15	20		225	192	184	176	162	154	138	121	52	226	
GP 620 / 22	15	20		235	202	193	185	170	161	144	127	54	235	
GP 620 / 23	15	20		246	211	202	193	178	169	151	133	56	245	
GP 620 / 24	18.5	25		257	220	211	201	185	176	157	139	59	254	
GP 620 / 25	18.5	25		267	229	219	210	193	183	164	144	61	297	

Paslanmaz Dalgıç Pompa / 620 Serisi
Stainless Steel Submersible Pumps / 620 Series 50HZ

Pompa Tipi Pumps Type	Güç Power		Debi / Flow									Pompa Ağırlık Pump Weight	Pompa Boy Pump length	Çıkış Out Inch
			m³/h	0.0	14.0	16.0	18.0	20.0	22.0	24.0	26.0			
	Kw	Hp	l/s	0.00	3.89	4.44	5.00	5.56	6.11	6.67	7.22			
GP 620 / 26	22	30	Basma Yüksekliği mSS / Head mSS	278	238	228	218	201	191	170	150	71	306	2½"
GP 620 / 27	22	30		289	247	237	227	209	198	177	156	74	316	
GP 620 / 28	22	30		299	257	246	235	216	205	184	162	76	325	
GP 620 / 29	22	30		310	266	255	243	224	213	190	168	78	335	
GP 620 / 30	26	35		320	275	263	252	232	220	197	173	81	345	
GP 620 / 31	26	35		331	284	272	260	239	227	203	179	83	354	
GP 620 / 32	26	35		342	293	281	268	247	235	210	185	85	364	
GP 620 / 33	26	35		352	302	290	277	255	242	216	191	88	373	
GP 620 / 34	30	40		363	312	298	285	263	249	223	196	90	383	
GP 620 / 35	30	40		374	321	307	294	270	257	230	202	92	393	
GP 620 / 36	30	40		384	330	316	302	278	264	236	208	94	402	
GP 620 / 37	30	40		395	339	325	310	286	271	243	214	97	412	
GP 620 / 38	30	40		405	348	334	319	294	279	249	220	99	421	
GP 620 / 39	37	50		416	357	342	327	301	286	256	225	101	431	
GP 620 / 40	37	50		427	367	351	336	309	293	262	231	104	441	
GP 620 / 41	37	50		437	376	360	344	317	301	269	237	106	450	
GP 620 / 42	37	50		448	385	369	352	325	308	275	243	108	460	
GP 620 / 43	37	50		459	394	378	361	332	316	282	249	111	469	
GP 620 / 44	37	50		469	403	386	369	340	323	289	254	113	479	
GP 620 / 45	37	50		480	412	395	378	348	330	295	260	115	489	
GP 620 / 46	37	50		490	421	404	386	355	338	302	266	117	498	
GP 620 / 47	37	50		501	431	413	394	363	345	308	272	120	508	
GP 620 / 48	45	60		512	440	421	403	371	352	315	277	122	517	
GP 620 / 49	45	60		522	449	430	411	379	360	321	283	124	527	
GP 620 / 50	45	60		533	458	439	419	386	367	328	289	127	537	

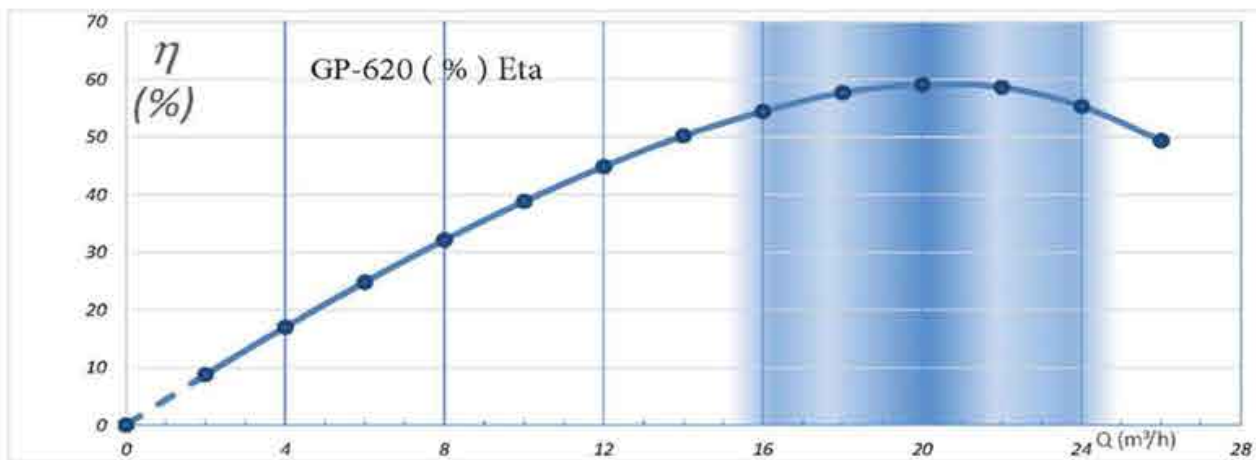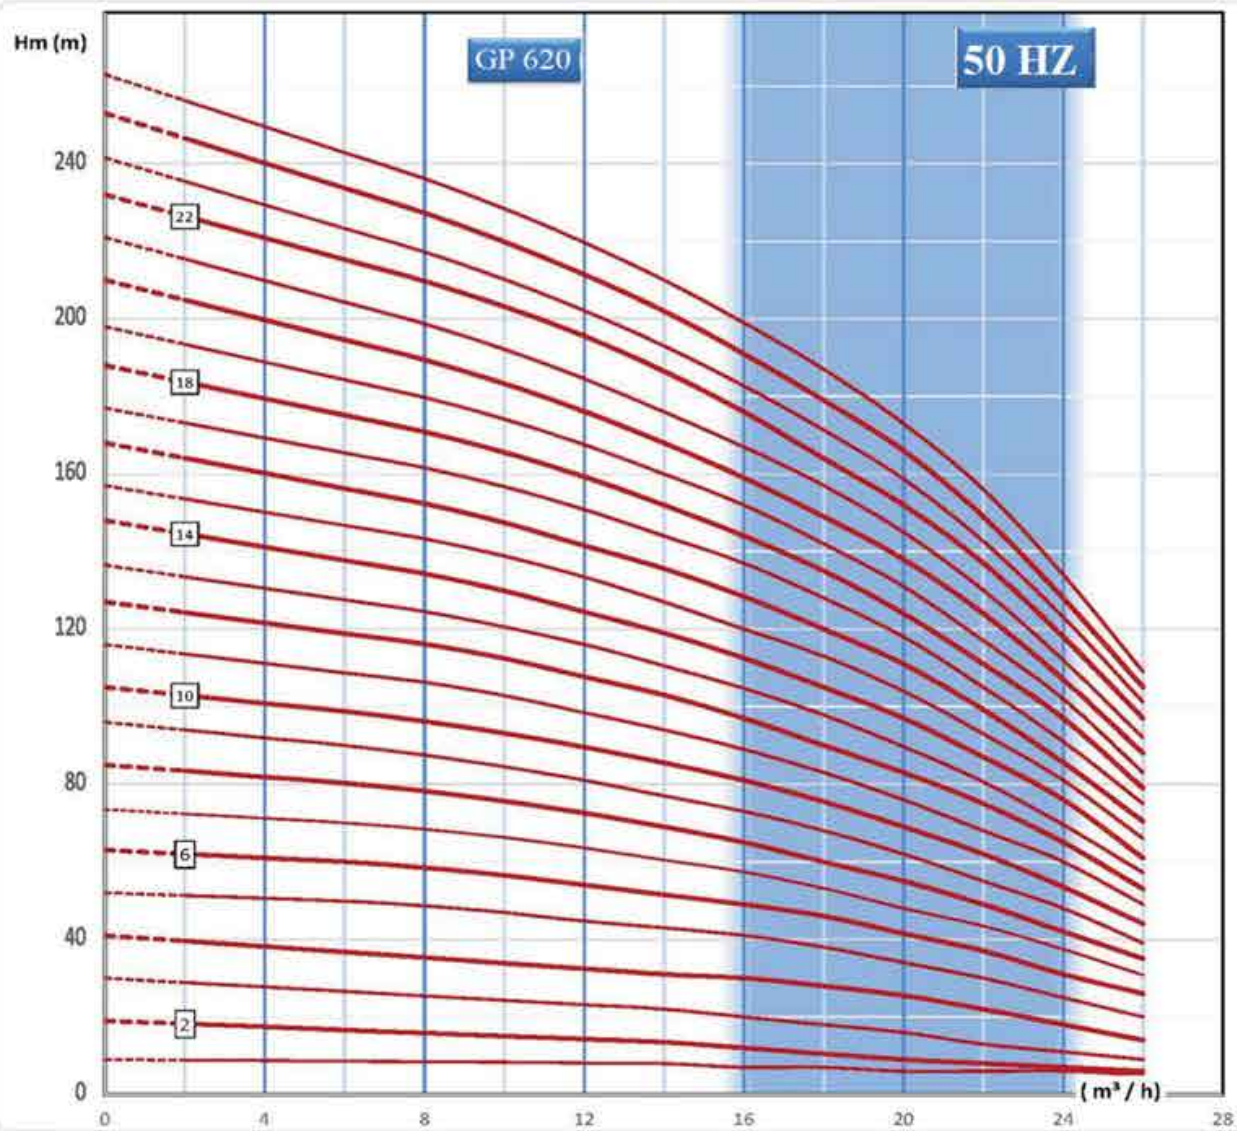

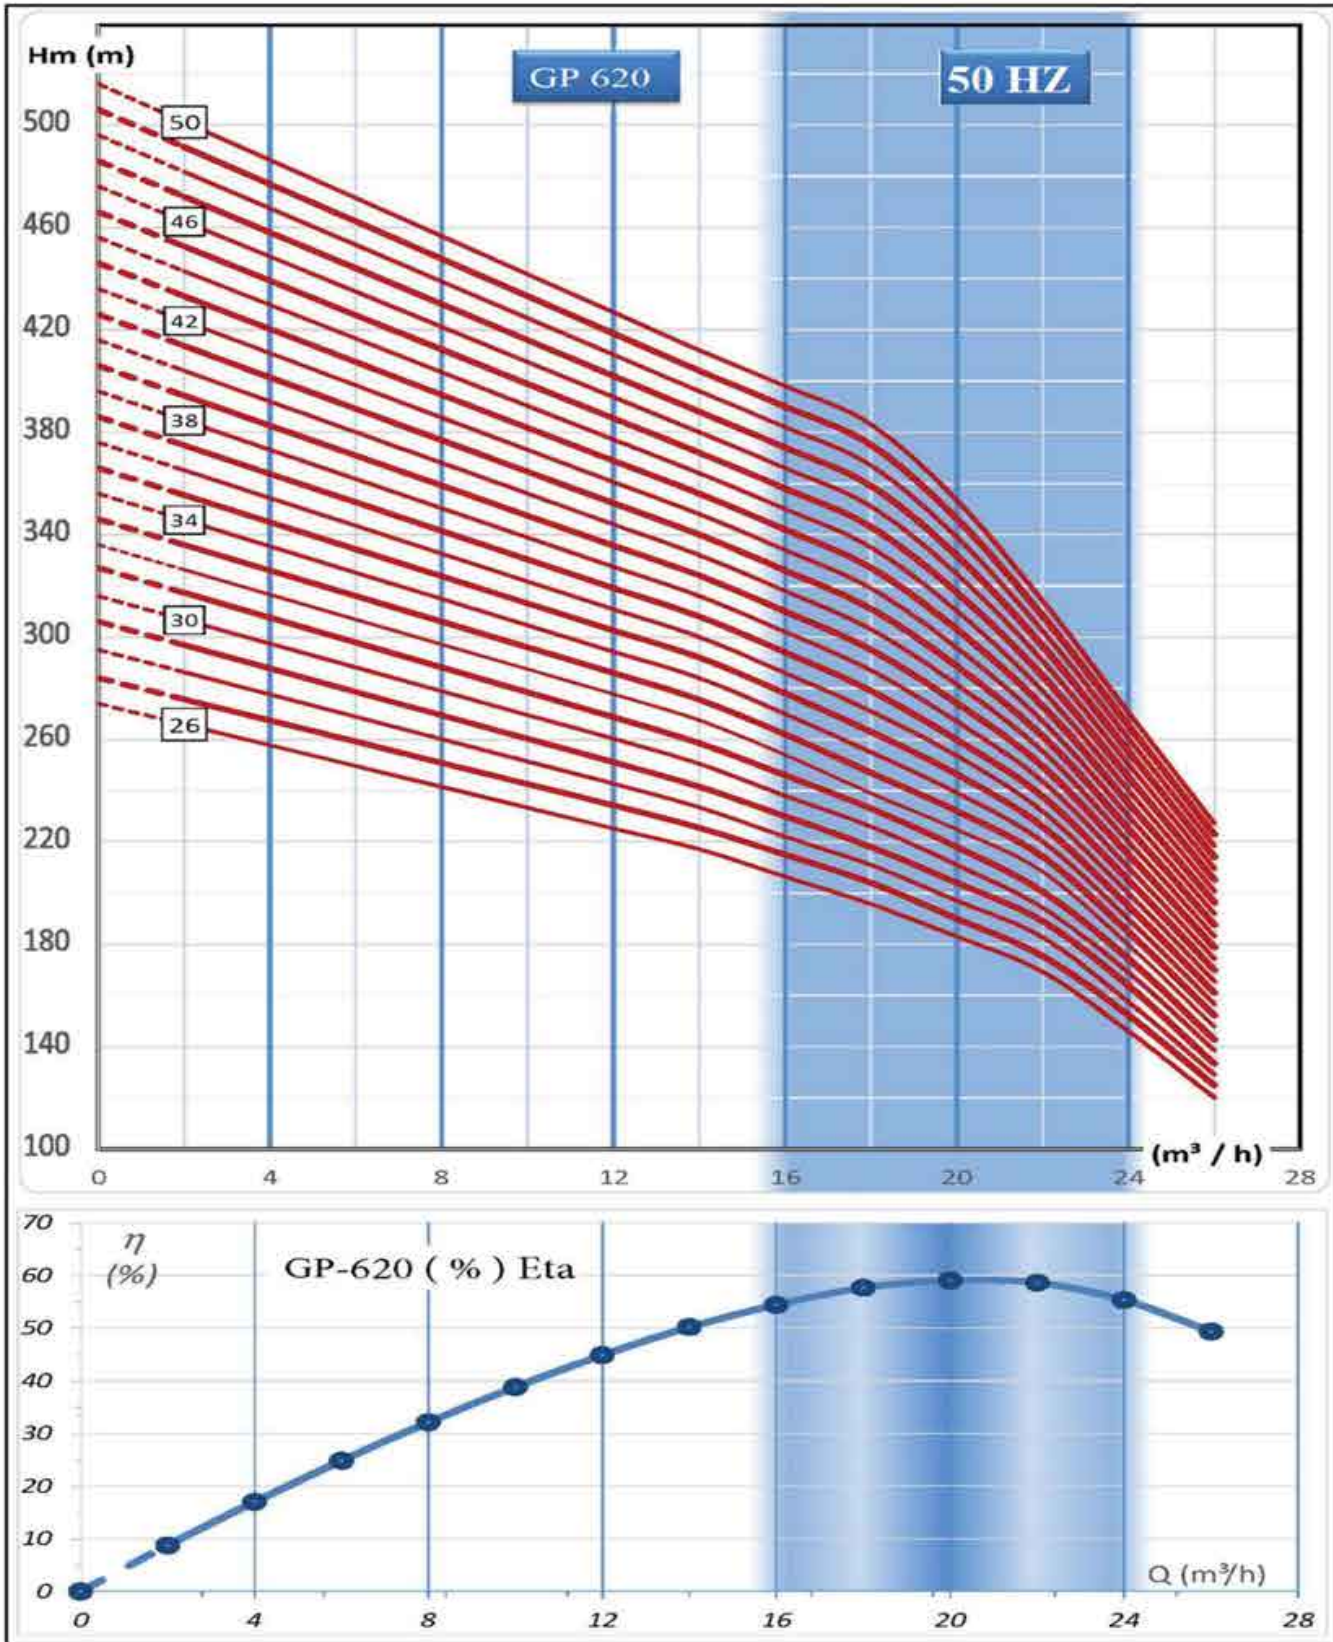



Paslanmaz Dalgıç Pompa / 630 Serisi
Stainless Steel Submersible Pumps / 630 Series **50HZ**

Pompa Tipi Pumps Type	Güç Power		Debi / Flow								Pompa Ağırlık Pump Weight	Pompa Boy Pump length	Çıkış Out Inch	
	m³/h	0.0	20.0	24.0	28.0	30.0	32.0	36.0	38.0					
	Kw	Hp	l/s	0.00	5.56	6.67	7.78	8.33	8.89	10.00	10.56	Kg		cm
GP 630 / 01	1.1	1.5	Basma Yüksekliği mSS / Head mSS	12	9	8	7	6	5	4	2	6	34	3"
GP 630 / 02	2.2	3		23	18	17	15	14	13	10	8	8	43	
GP 630 / 03	2.2	3		34	28	26	24	22	20	16	13	10	53	
GP 630 / 04	3	4		46	38	35	32	30	27	22	18	13	62	
GP 630 / 05	4	5.5		57	48	45	41	38	35	28	23	15	72	
GP 630 / 06	5.5	7.5		69	57	53	48	46	42	33	28	17	82	
GP 630 / 07	5.5	7.5		81	67	63	57	54	49	40	33	20	91	
GP 630 / 08	7.5	10		92	76	72	65	61	56	44	38	22	101	
GP 630 / 09	7.5	10		105	87	81	74	70	63	51	43	24	110	
GP 630 / 10	9.2	12.5		115	96	89	82	77	70	57	47	27	120	
GP 630 / 11	9.2	12.5		126	105	98	88	84	76	62	52	29	130	
GP 630 / 12	9.2	12.5		138	115	108	98	92	84	68	58	31	139	
GP 630 / 13	11	15		149	125	116	106	99	91	73	63	33	149	
GP 630 / 14	11	15		161	135	126	115	109	98	80	69	36	158	
GP 630 / 15	13	17.5		172	144	135	123	115	106	86	71	38	168	
GP 630 / 16	13	17.5		184	155	145	132	124	114	92	77	40	178	
GP 630 / 17	15	20		196	164	153	139	132	121	97	83	43	187	
GP 630 / 18	15	20		209	175	164	151	142	129	105	89	45	197	
GP 630 / 19	18.5	25		219	184	173	158	149	137	111	95	47	206	
GP 630 / 20	18.5	25		230	193	181	165	156	144	115	98	50	216	
GP 630 / 21	18.5	25		241	202	190	173	163	150	121	105	52	226	
GP 630 / 22	22	30		254	214	201	184	173	159	129	109	54	235	
GP 630 / 23	22	30		265	222	209	192	180	166	135	114	56	245	
GP 630 / 24	22	30		277	232	218	198	188	171	139	119	59	254	
GP 630 / 25	26	35		287	241	226	207	195	180	144	123	61	297	

Paslanmaz Dalgıç Pompa / 630 Serisi
Stainless Steel Submersible Pumps / 630 Series 50HZ

Pompa Tipi Pumps Type	Güç Power		Debi / Flow									Pompa Ağırlık	Pompa Boy	Çıkış Out Inch
			m³/h	0.0	20.0	24.0	28.0	30.0	32.0	36.0	38.0	Pump Weight	Pump Length	
	l/s	0.00	5.56	6.67	7.78	8.33	8.89	10.00	10.56	Kg	cm			
GP 630 / 26	26	35	Basma Yüksekliği mSS / Head mSS	299	249	235	214	202	186	150	128	71	306	3"
GP 630 / 27	26	35		312	261	245	224	212	195	157	135	74	316	
GP 630 / 28	26	35		322	270	253	233	218	201	163	139	76	325	
GP 630 / 29	30	40		334	280	263	240	226	209	168	144	78	335	
GP 630 / 30	30	40		345	289	271	246	233	216	172	150	81	345	
GP 630 / 31	30	40		356	298	280	255	241	223	179	154	83	354	
GP 630 / 32	30	40		369	310	290	264	250	231	186	162	85	364	
GP 630 / 33	37	50		381	318	299	274	258	238	191	166	88	373	
GP 630 / 34	37	50		392	328	308	280	264	246	196	171	90	383	
GP 630 / 35	37	50		402	337	317	289	272	252	201	174	92	393	
GP 630 / 36	37	50		412	346	326	298	280	258	206	177	94	402	
GP 630 / 37	37	50		422	355	335	307	288	264	211	180	97	412	
GP 630 / 38	37	50		432	364	344	316	296	270	216	183	99	421	
GP 630 / 39	37	50		442	373	353	325	304	276	221	186	101	431	
GP 630 / 40	37	50		452	382	362	334	312	282	226	189	104	441	
GP 630 / 41	45	60		462	391	371	343	320	288	231	192	106	450	
GP 630 / 42	45	60		472	400	380	352	328	294	236	195	108	460	
GP 630 / 43	45	60		482	409	389	361	336	300	241	198	111	469	
GP 630 / 44	45	60		492	418	398	370	344	306	246	201	113	479	
GP 630 / 45	45	60		502	427	407	379	352	312	251	204	115	489	
GP 630 / 46	45	60		512	436	416	388	360	318	256	207	117	498	
GP 630 / 47	45	60		522	445	425	397	368	324	261	210	120	508	
GP 630 / 48	45	60		532	454	434	406	376	330	266	213	122	517	
GP 630 / 49	52	70		542	463	443	415	384	336	271	216	124	527	
GP 630 / 50	52	70		552	472	452	424	392	342	276	219	127	537	

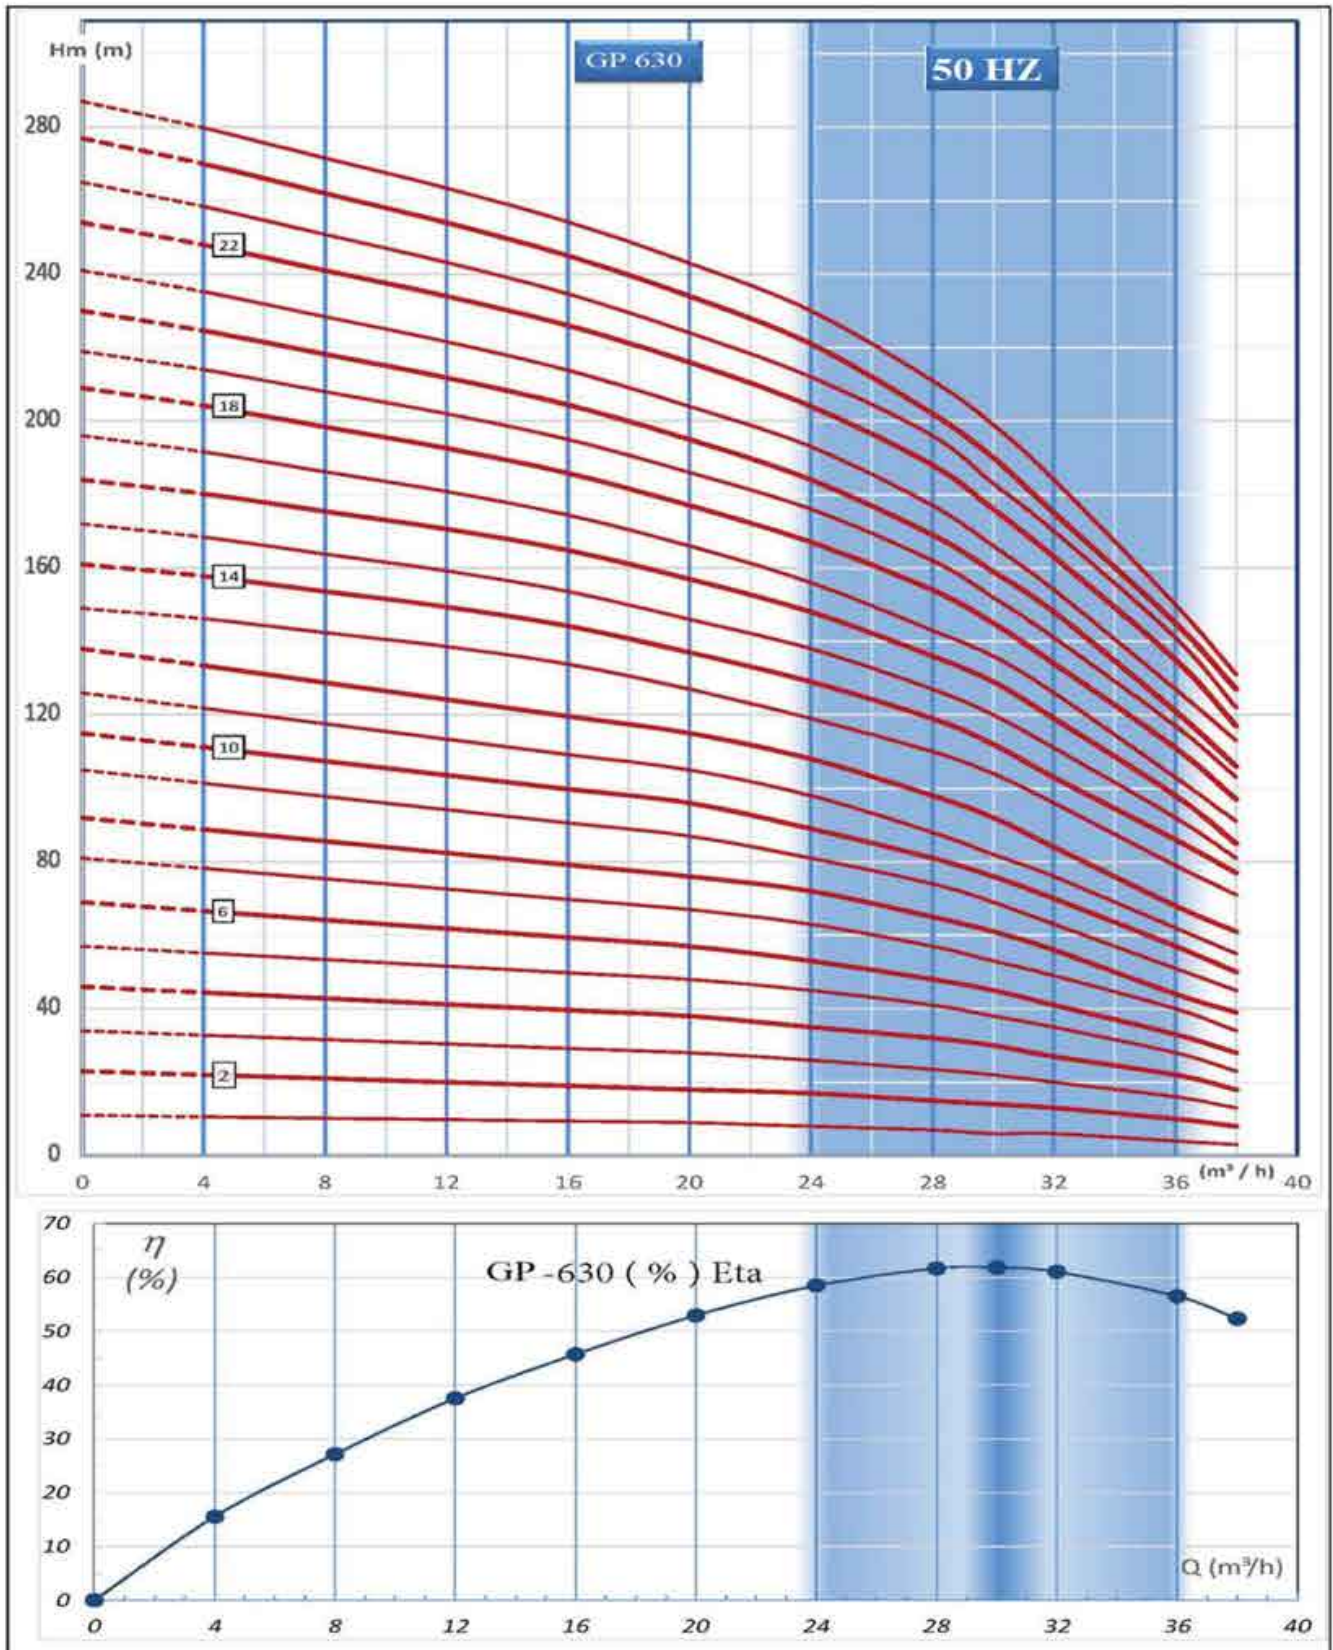


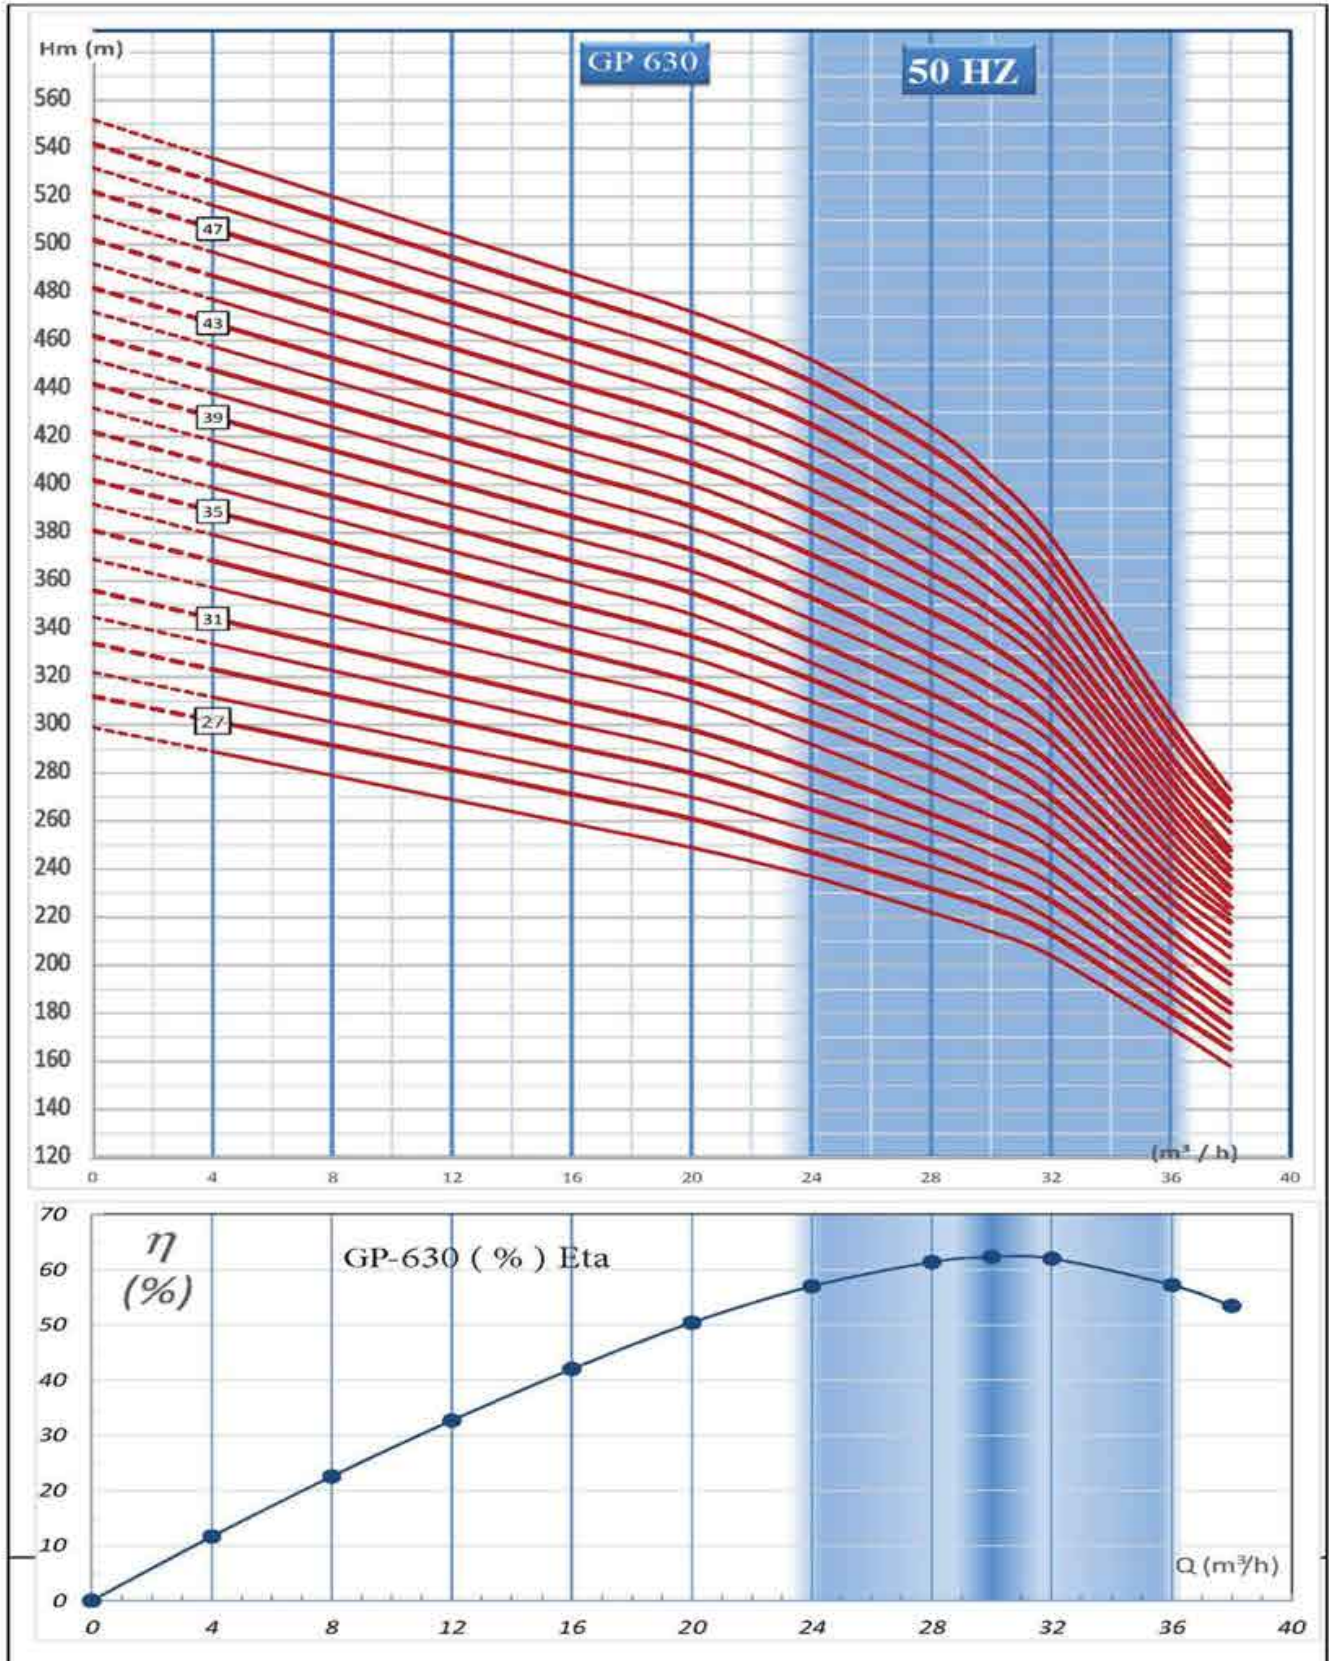




Paslanmaz Dalgıç Pompa / 646 Serisi
Stainless Steel Submersible Pumps / 646 Series **50HZ**

Pompa Tipi Pump Type	Güç Power		Debi / Flow										Pompa Ağırlık Pump Weight Kg	Pompa Boy Pump length cm	Çıkış Out Inch
	Kw	Hp	m³/h	0.0	30.0	38.0	42.0	46.0	50.0	54.0	58.0	60.0			
			l/s	0.00	8.33	10.56	11.67	12.78	13.89	15.00	16.11	16.67			
GP 646 / 01	1.5	2	Basma Yüksekliği mSS / Head mSS	13	10	9	8	7	6	5	4	3	6	35	3"
GP 646 / 02	3	4		26	21	19	18	16	14	12	10	9	8	47	
GP 646 / 03	5.5	7.5		40	33	29	27	25	23	20	17	13	10	58	
GP 646 / 04	7.5	10		53	44	40	37	34	31	27	23	18	13	70	
GP 646 / 05	7.5	10		67	54	49	46	43	39	34	28	22	15	81	
GP 646 / 06	9.2	12.5		80	66	59	56	51	47	41	34	26	17	93	
GP 646 / 07	11	15		93	77	70	65	60	55	48	41	31	20	104	
GP 646 / 08	13	17.5		107	88	80	75	69	63	56	47	35	22	116	
GP 646 / 09	15	20		121	100	90	85	79	71	63	53	40	25	127	
GP 646 / 10	15	20		133	110	100	94	86	79	69	59	44	27	138	
GP 646 / 11	18.5	25		147	122	111	105	96	88	78	66	48	30	150	
GP 646 / 12	18.5	25		160	132	121	114	105	95	84	71	53	32	161	
GP 646 / 13	18.5	25		174	144	132	124	115	104	92	77	57	35	173	
GP 646 / 14	22	30		186	155	141	133	122	112	99	83	62	37	184	
GP 646 / 15	22	30		199	166	150	142	131	119	105	88	66	39	196	
GP 646 / 16	26	35		213	179	162	152	141	128	114	96	70	42	207	
GP 646 / 17	26	35		226	189	171	161	149	135	120	102	75	44	219	
GP 646 / 18	30	40		240	201	183	172	159	144	128	109	79	47	230	
GP 646 / 19	30	40		252	212	191	179	168	152	135	114	84	49	241	
GP 646 / 20	30	40		265	222	201	189	175	160	141	120	88	52	253	
GP 646 / 21	37	50		279	235	214	202	186	171	151	127	92	54	264	
GP 646 / 22	37	50		292	246	223	211	194	177	158	134	97	57	276	
GP 646 / 23	37	50		305	257	233	220	204	185	163	139	101	59	287	

Paslanmaz Dalgıç Pompa / 646 Serisi
Stainless Steel Submersible Pumps / 646 Series 50HZ

Pompa Tipi Pump Type	Güç Power		Debi / Flow									Pompa Ağırlık	Pompa Boy	Çıkış Out Inch	
			m³/h	0.0	30.0	38.0	42.0	46.0	50.0	54.0	58.0	60.0	Pump Weight		Pump length
	Kw	Hp	l/s	0.00	8.33	10.56	11.67	12.78	13.89	15.00	16.11	16.67	Kg	cm	
GP 646 / 24	37	50	Basma Yüksekliği mSS / Head Mss	317	267	242	228	211	193	170	143	106	70	322	3"
GP 646 / 25	37	50		332	279	253	239	220	202	177	151	110	72	333	
GP 646 / 26	45	60		349	291	264	250	231	210	185	159	114	74	345	
GP 646 / 27	45	60		362	302	275	259	239	218	192	165	119	77	356	
GP 646 / 28	45	60		374	312	284	268	247	225	199	170	123	79	368	
GP 646 / 29	45	60		387	323	293	276	255	232	206	174	128	82	379	
GP 646 / 30	45	60		400	334	303	285	264	239	213	179	132	84	390	
GP 646 / 31	52	70		413	345	313	294	273	246	220	184	136	87	402	
GP 646 / 32	52	70		426	356	323	303	282	253	227	189	141	89	413	
GP 646 / 33	52	70		439	367	333	312	291	260	234	194	145	92	425	
GP 646 / 34	55	75		452	378	343	321	300	267	241	199	150	94	436	
GP 646 / 35	55	75		465	389	353	330	309	274	248	204	154	96	448	
GP 646 / 36	55	75		478	400	363	339	318	281	255	209	158	99	459	
GP 646 / 37	60	80		491	411	373	348	327	288	262	214	163	101	471	
GP 646 / 38	60	80		504	422	383	357	336	295	269	219	167	104	482	
GP 646 / 39	66	90		517	433	393	366	345	302	276	224	172	106	493	
GP 646 / 40	66	90		530	444	403	375	354	309	283	229	176	109	505	
GP 646 / 41	66	90		543	455	413	384	363	316	290	234	180	111	516	
GP 646 / 42	66	90		556	466	423	393	372	323	297	239	185	114	528	
GP 646 / 43	66	90		569	477	433	402	381	330	304	244	189	116	539	
GP 646 / 44	75	100		582	488	443	411	390	337	311	249	194	119	551	
GP 646 / 45	75	100		595	499	453	420	399	344	318	254	198	121	562	
GP 646 / 46	75	100		608	510	463	429	408	351	325	259	202	123	574	

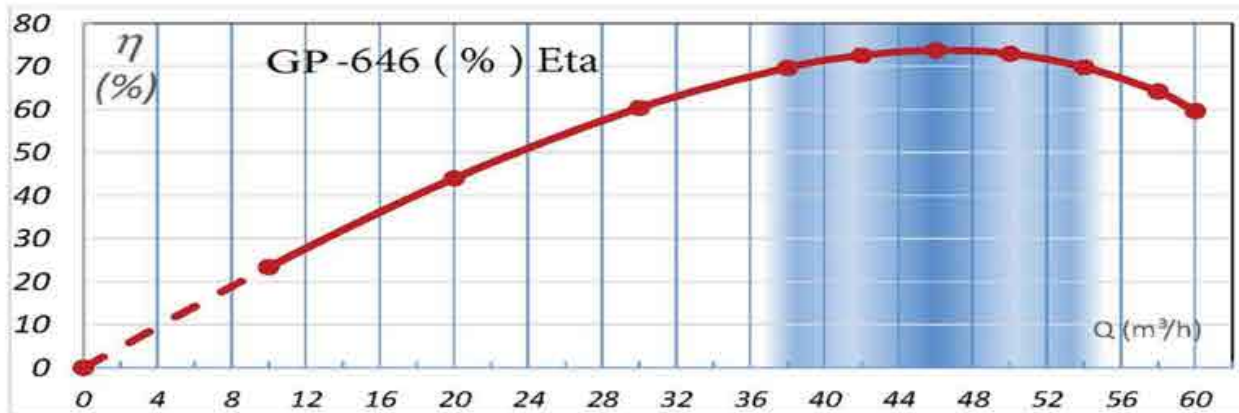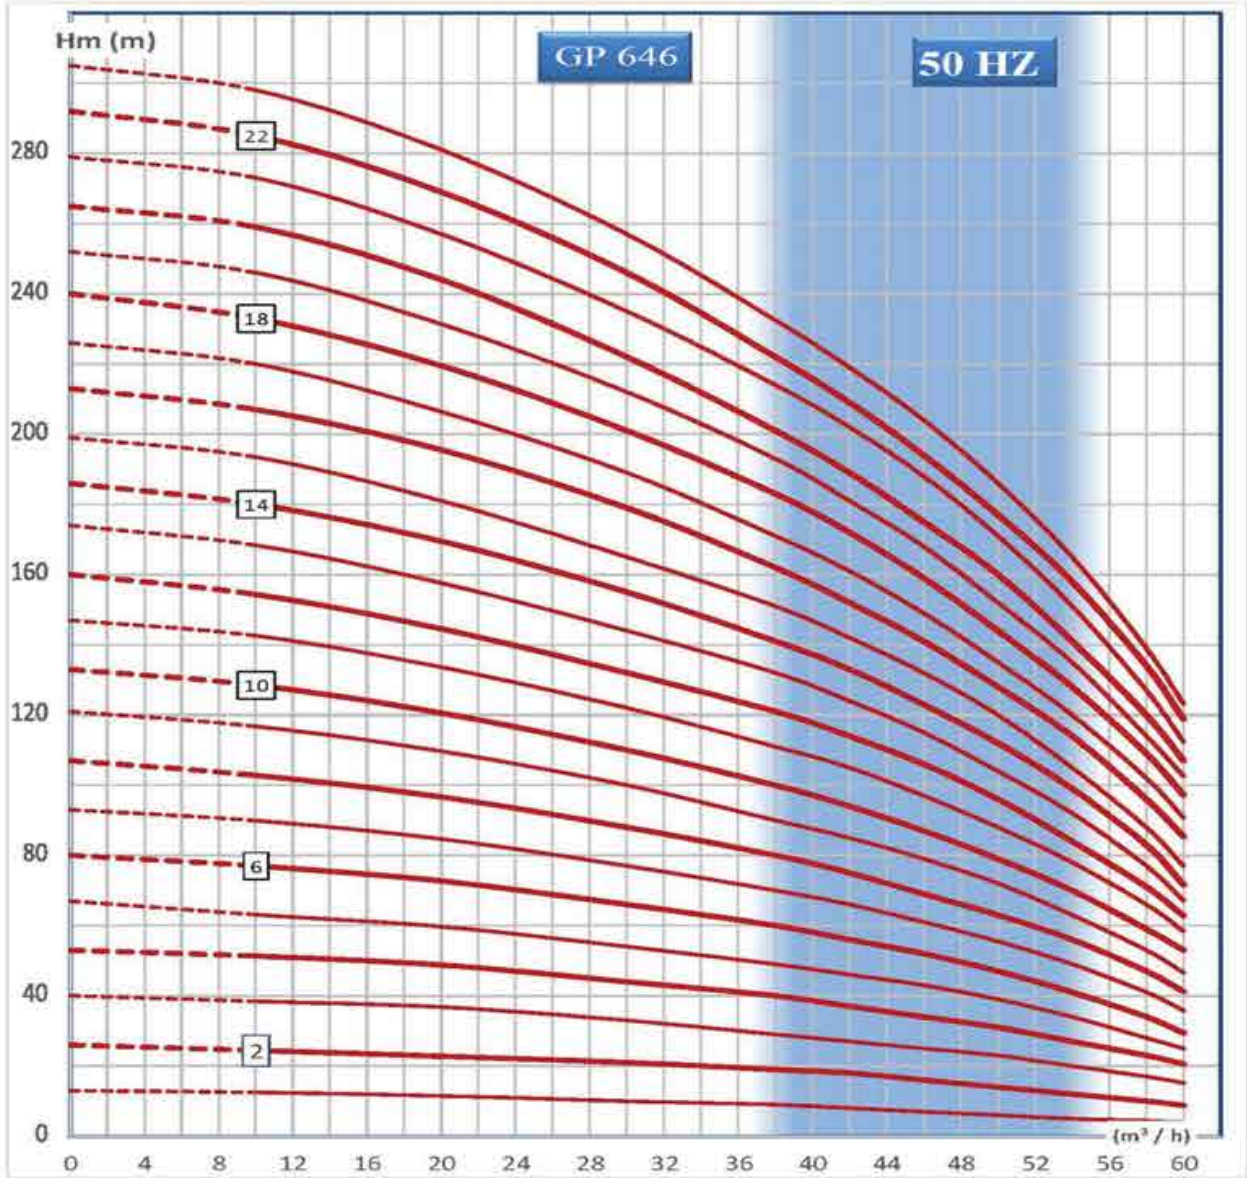

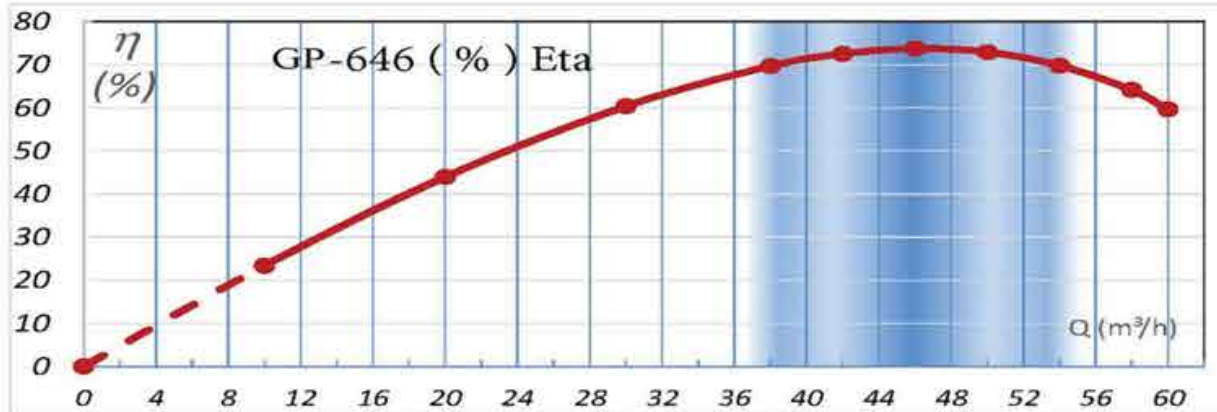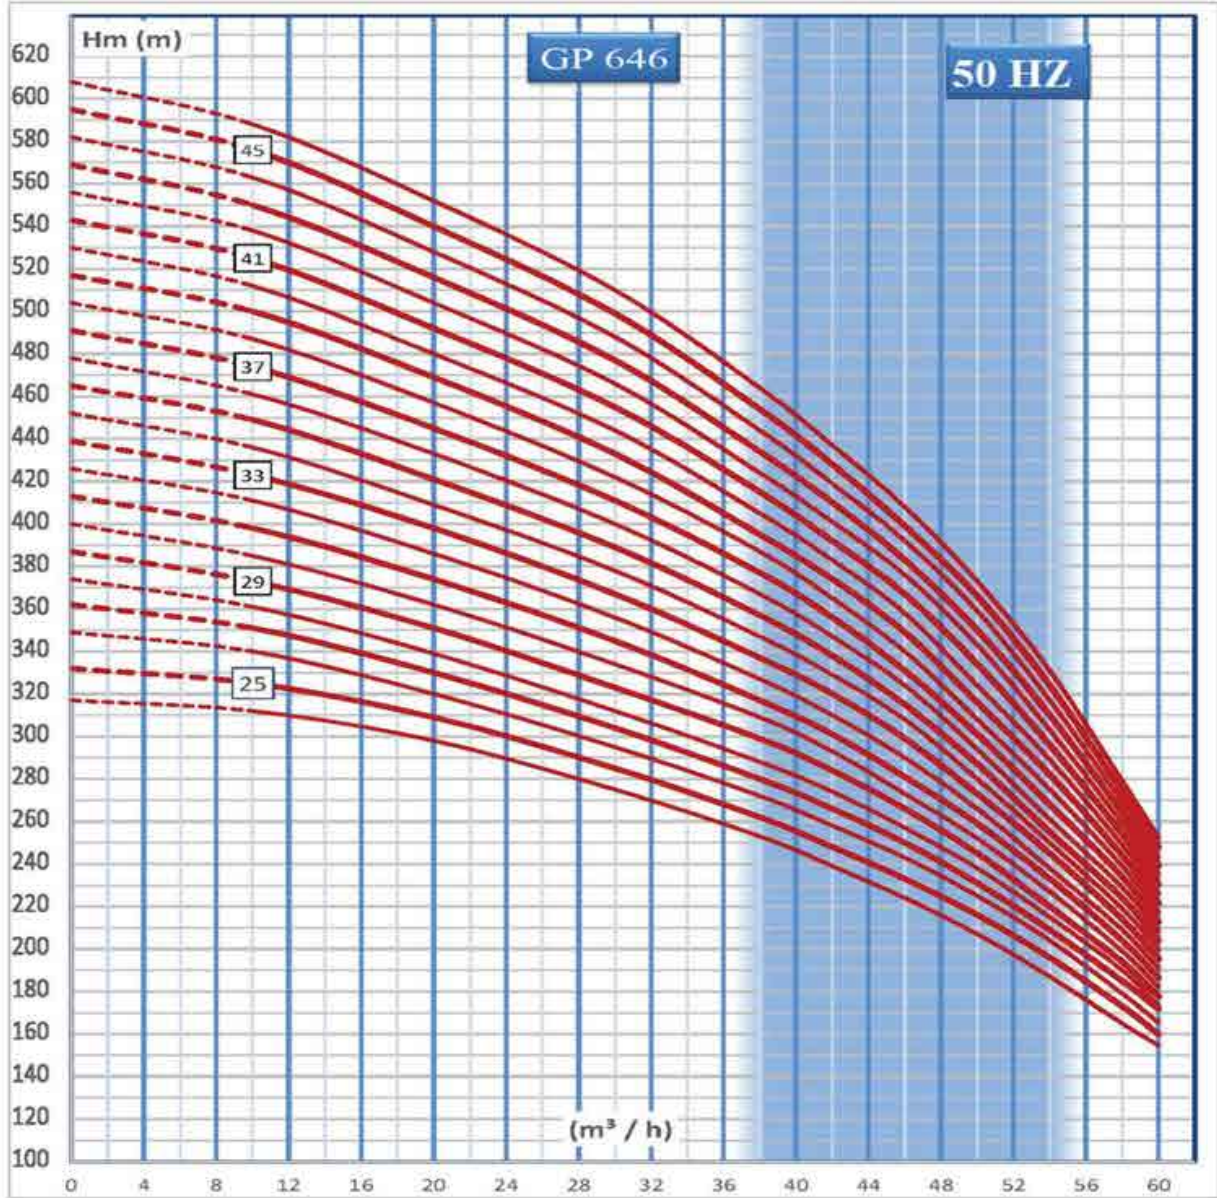


Paslanmaz Dalgıç Pompa / 660 Serisi
Stainless Steel Submersible Pumps / 660 Series 50HZ


Pompa Tipi Pumps Type	Güç Power		Debi / Flow								Pompa Ağırlık	Pompa Boy	Çıkış Out Inch
	Kw	Hp	m³/h	0.0	40.0	50.0	55.0	60.0	65.0	70.0	Pump Weight	Pump length	
			l/s	0.00	11.11	13.89	15.28	16.67	18.06	19.44	Kg	cm	
GP 660 / 01	2.2	3	Basma Yüksekliği mSS / Head mSS	10	9	8	7	6	5	4	6	35	4"
GP 660 / 02	4	5.5		27	19	17	16	14	12	10	8	47	
GP 660 / 03	5.5	7.5		41	30	26	24	22	19	16	10	58	
GP 660 / 04	7.5	10		55	41	36	33	30	26	23	13	70	
GP 660 / 05	9.2	12.5		70	52	45	42	38	34	29	15	81	
GP 660 / 06	11	15		84	62	55	51	46	41	35	17	93	
GP 660 / 07	13	17.5		99	74	64	59	54	48	41	20	104	
GP 660 / 08	15	20		114	85	74	69	63	56	47	22	116	
GP 660 / 09	18.5	25		129	96	84	78	71	63	55	25	127	
GP 660 / 10	18.5	25		143	107	93	86	79	71	61	27	138	
GP 660 / 11	22	30		158	118	103	95	88	78	68	30	150	
GP 660 / 12	22	30		171	128	112	103	95	85	73	32	161	
GP 660 / 13	22	30		187	140	122	113	104	93	80	35	173	
GP 660 / 14	26	35		199	150	131	122	112	99	86	37	184	
GP 660 / 15	26	35		213	160	140	130	119	106	92	39	196	
GP 660 / 16	30	40		228	172	150	140	128	114	99	42	207	
GP 660 / 17	30	40		242	182	159	147	135	120	105	44	219	
GP 660 / 18	37	50		258	195	170	158	145	129	113	47	230	
GP 660 / 19	37	50		272	205	179	166	153	136	119	49	241	
GP 660 / 20	37	50		286	215	188	174	161	143	125	52	253	
GP 660 / 21	37	50		301	227	208	184	169	151	132	54	264	
GP 660 / 22	45	60		316	239	208	194	178	159	139	57	276	
GP 660 / 23	45	60		329	249	217	202	186	167	145	59	287	

Paslanmaz Dalgıç Pompa / 660 Serisi

Stainless Steel Submersible Pumps / 660 Series 50HZ


Pompa Tipi Pump Type	Güç Power		Debi / Flow								Pompa Ağırlık Pump Weight	Pompa Boy Pump length	Çıkış Out Inch
			m³/h	0.0	40.0	50.0	55.0	60.0	65.0	70.0			
	Kw	Hp	l/s	0.00	11.11	13.89	15.28	16.67	18.06	19.44	Kg	cm	
GP 660 / 24	45	60	Basma Yüksekliği mSS / Head mSS	342	259	226	211	193	174	150	70	322	4"
GP 660 / 25	45	60		357	271	237	220	202	182	158	72	333	
GP 660 / 26	55	75		373	283	248	230	212	190	166	74	345	
GP 660 / 27	55	75		382	293	257	238	219	196	171	77	356	
GP 660 / 28	55	75		401	304	266	246	226	203	177	79	368	
GP 660 / 29	55	75		414	314	274	254	234	210	182	82	379	
GP 660 / 30	55	75		428	324	283	262	242	217	188	84	390	
GP 660 / 31	55	75		442	334	292	270	250	224	194	87	402	
GP 660 / 32	60	80		456	344	301	278	258	231	200	89	413	
GP 660 / 33	60	80		470	354	310	286	266	238	206	92	425	
GP 660 / 34	60	80		484	364	319	294	274	245	212	94	436	
GP 660 / 35	66	90		498	374	328	302	282	252	218	96	448	
GP 660 / 36	66	90		512	3684	337	310	290	259	224	99	459	
GP 660 / 37	66	90		526	394	346	318	298	266	230	101	471	
GP 660 / 38	66	90		540	404	355	326	306	273	236	104	482	
GP 660 / 39	75	100		554	414	364	334	314	280	242	106	493	
GP 660 / 40	75	100		568	424	373	342	322	287	248	109	505	
GP 660 / 41	75	100		582	434	382	350	330	294	254	111	516	
GP 660 / 42	75	100		596	444	391	358	338	301	260	114	528	
GP 660 / 43	81	110		610	454	400	366	346	308	266	116	539	
GP 660 / 44	81	110		624	464	409	374	354	315	272	119	551	
GP 660 / 45	81	110		638	474	418	382	362	322	278	121	562	
GP 660 / 46	81	110		652	484	427	390	370	329	284	123	574	

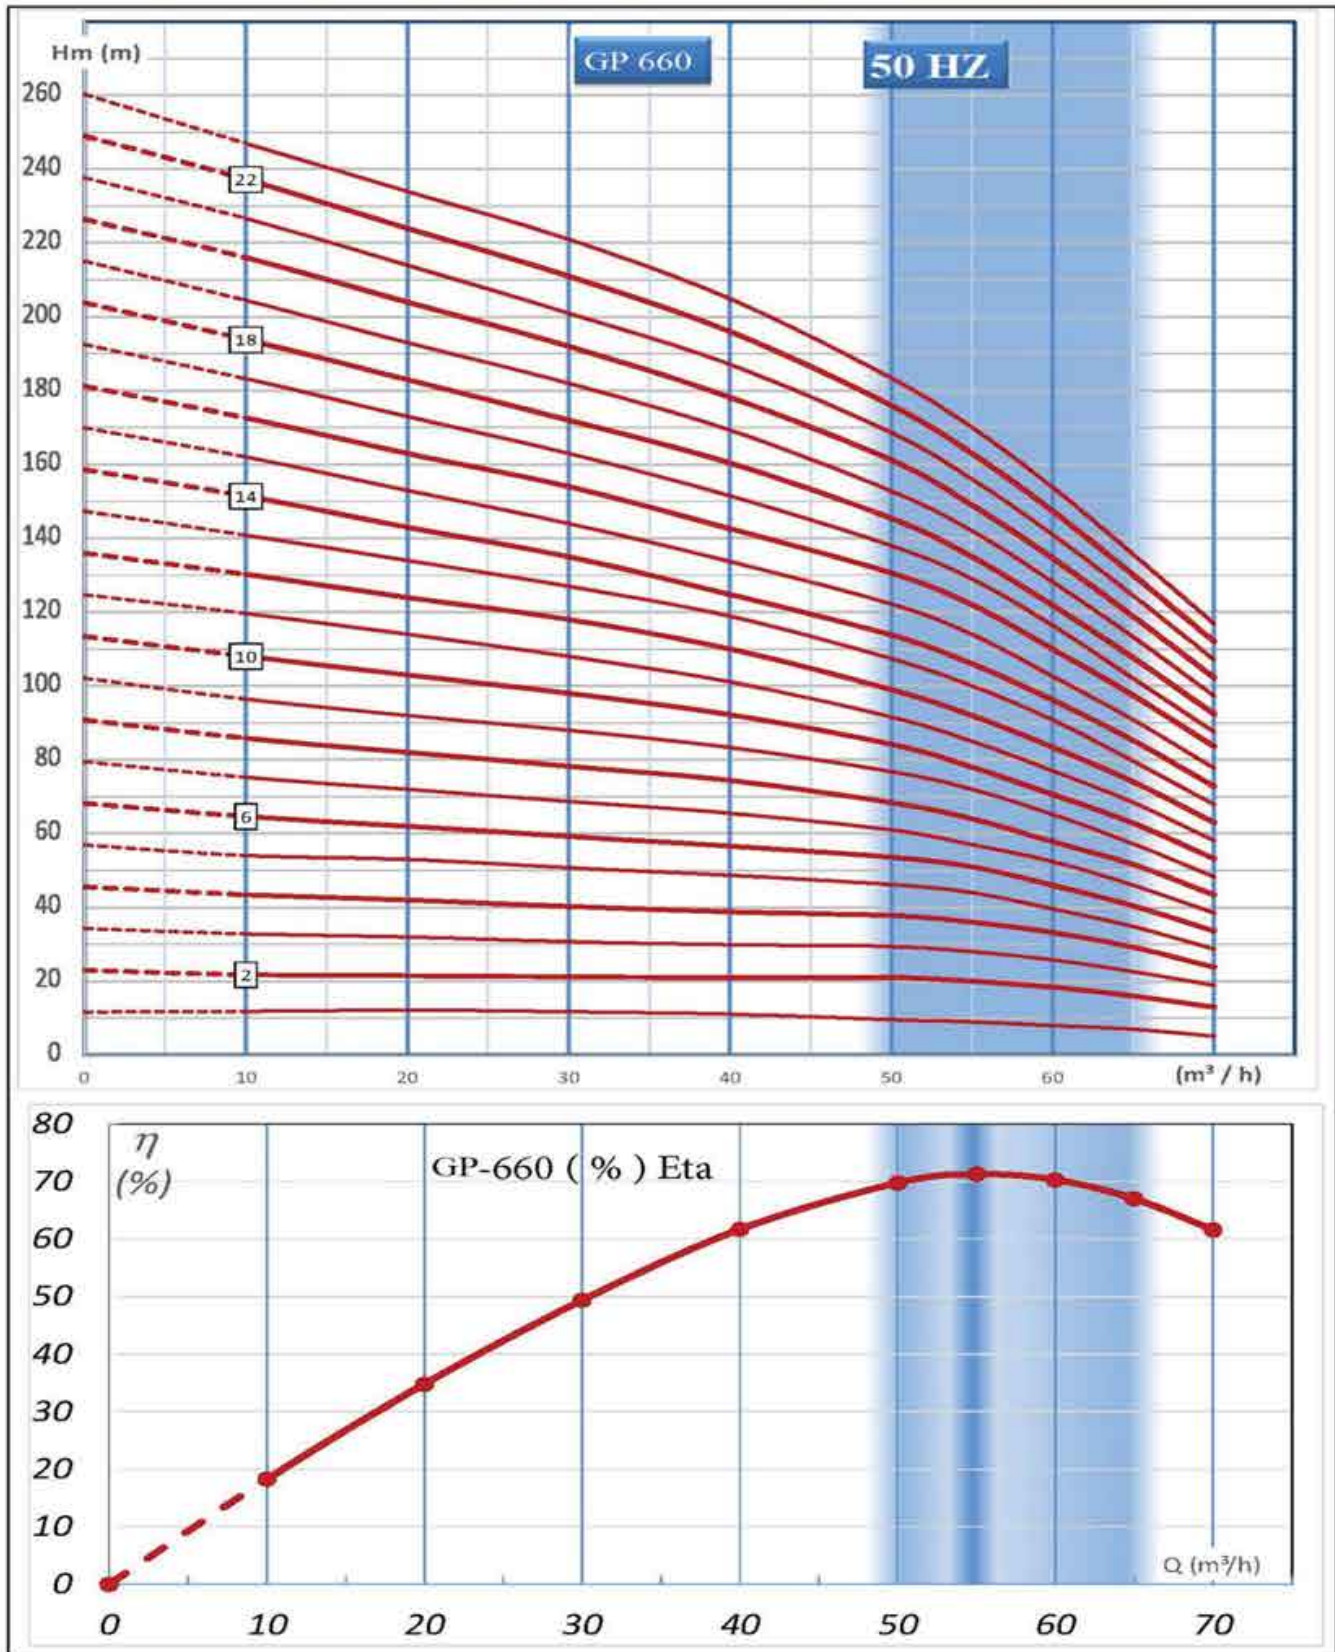

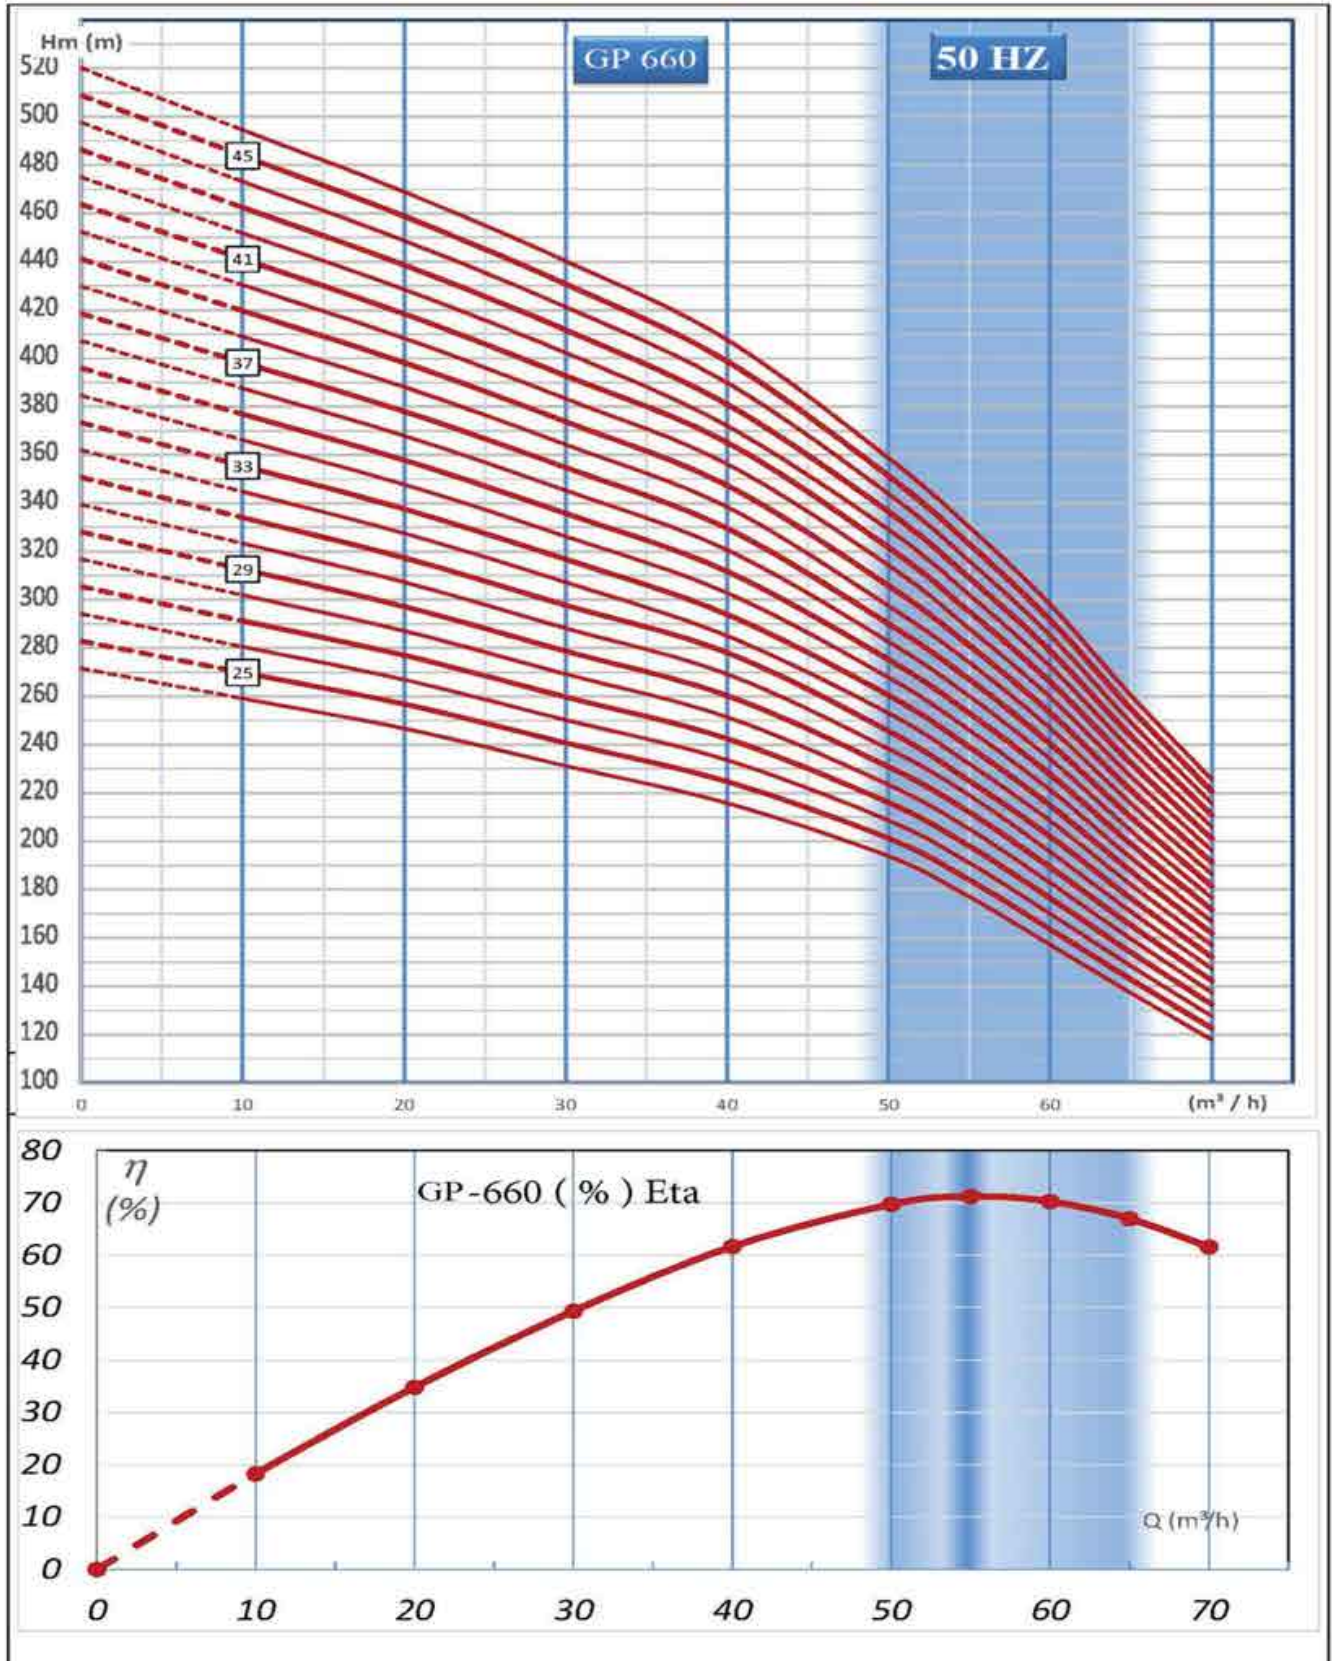


Paslanmaz Dalgıç Pompa / 675 Serisi
Stainless Steel Submersible Pumps / 675 Series 50HZ

Pompa Tipi Pumps Type	Güç Power		Debi / Flow									Pompa Ağırlık	Pompa Boy	Çıkış Out Inch
	Kw	Hp	m³/h	0.0	55.0	65.0	70.0	75.0	80.0	85.0	95.0	Pump Weight	Pump length	
			l/s	0.00	15.28	18.06	19.44	20.83	22.22	23.61	26.39	Kg	cm	
GP 675 / 01	3	4	Basma Yüksekliği mSS / Head mSS	17	12	11	10	9	8	7	6	11	44	4"
GP 675 / 02	5.5	7.5		35	24	22	21	19	17	14	12	14	58	
GP 675 / 03	7.5	10		52	37	34	32	28	25	22	18	17	72	
GP 675 / 04	9.2	12.5		70	49	45	42	38	34	29	24	20	86	
GP 675 / 05	13	17.5		87	61	56	53	47	42	36	30	23	100	
GP 675 / 06	15	20		104	73	67	64	56	50	43	36	26	114	
GP 675 / 07	18.5	25		122	85	78	74	66	59	50	42	29	128	
GP 675 / 08	18.5	25		139	98	90	85	75	67	58	48	32	142	
GP 675 / 09	22	30		157	110	101	95	85	76	65	54	35	156	
GP 675 / 10	26	35		174	122	112	106	94	84	72	60	38	170	
GP 675 / 11	26	35		191	134	123	117	103	92	79	66	41	184	
GP 675 / 12	30	40		209	146	134	127	113	101	86	72	44	198	
GP 675 / 13	30	40		226	159	146	138	122	109	94	78	47	213	
GP 675 / 14	37	50		244	171	157	148	132	118	101	84	50	227	
GP 675 / 15	37	50		261	183	168	159	141	126	108	90	53	241	
GP 675 / 16	37	50		278	195	179	170	150	134	115	96	56	255	
GP 675 / 17	45	60		296	207	190	180	160	143	122	102	59	269	
GP 675 / 18	45	60		313	220	202	191	169	151	130	108	62	283	
GP 675 / 19	45	60		331	232	213	201	179	160	137	114	65	297	
GP 675 / 20	52	70		348	244	224	212	188	168	144	120	68	311	
GP 675 / 21	52	70		365	256	235	223	197	176	151	126	71	325	
GP 675 / 22	52	70		383	268	246	233	207	185	158	132	74	339	
GP 675 / 23	55	75		400	281	258	244	216	193	166	138	77	353	
GP 675 / 24	55	75		418	293	269	254	226	202	173	144	80	367	

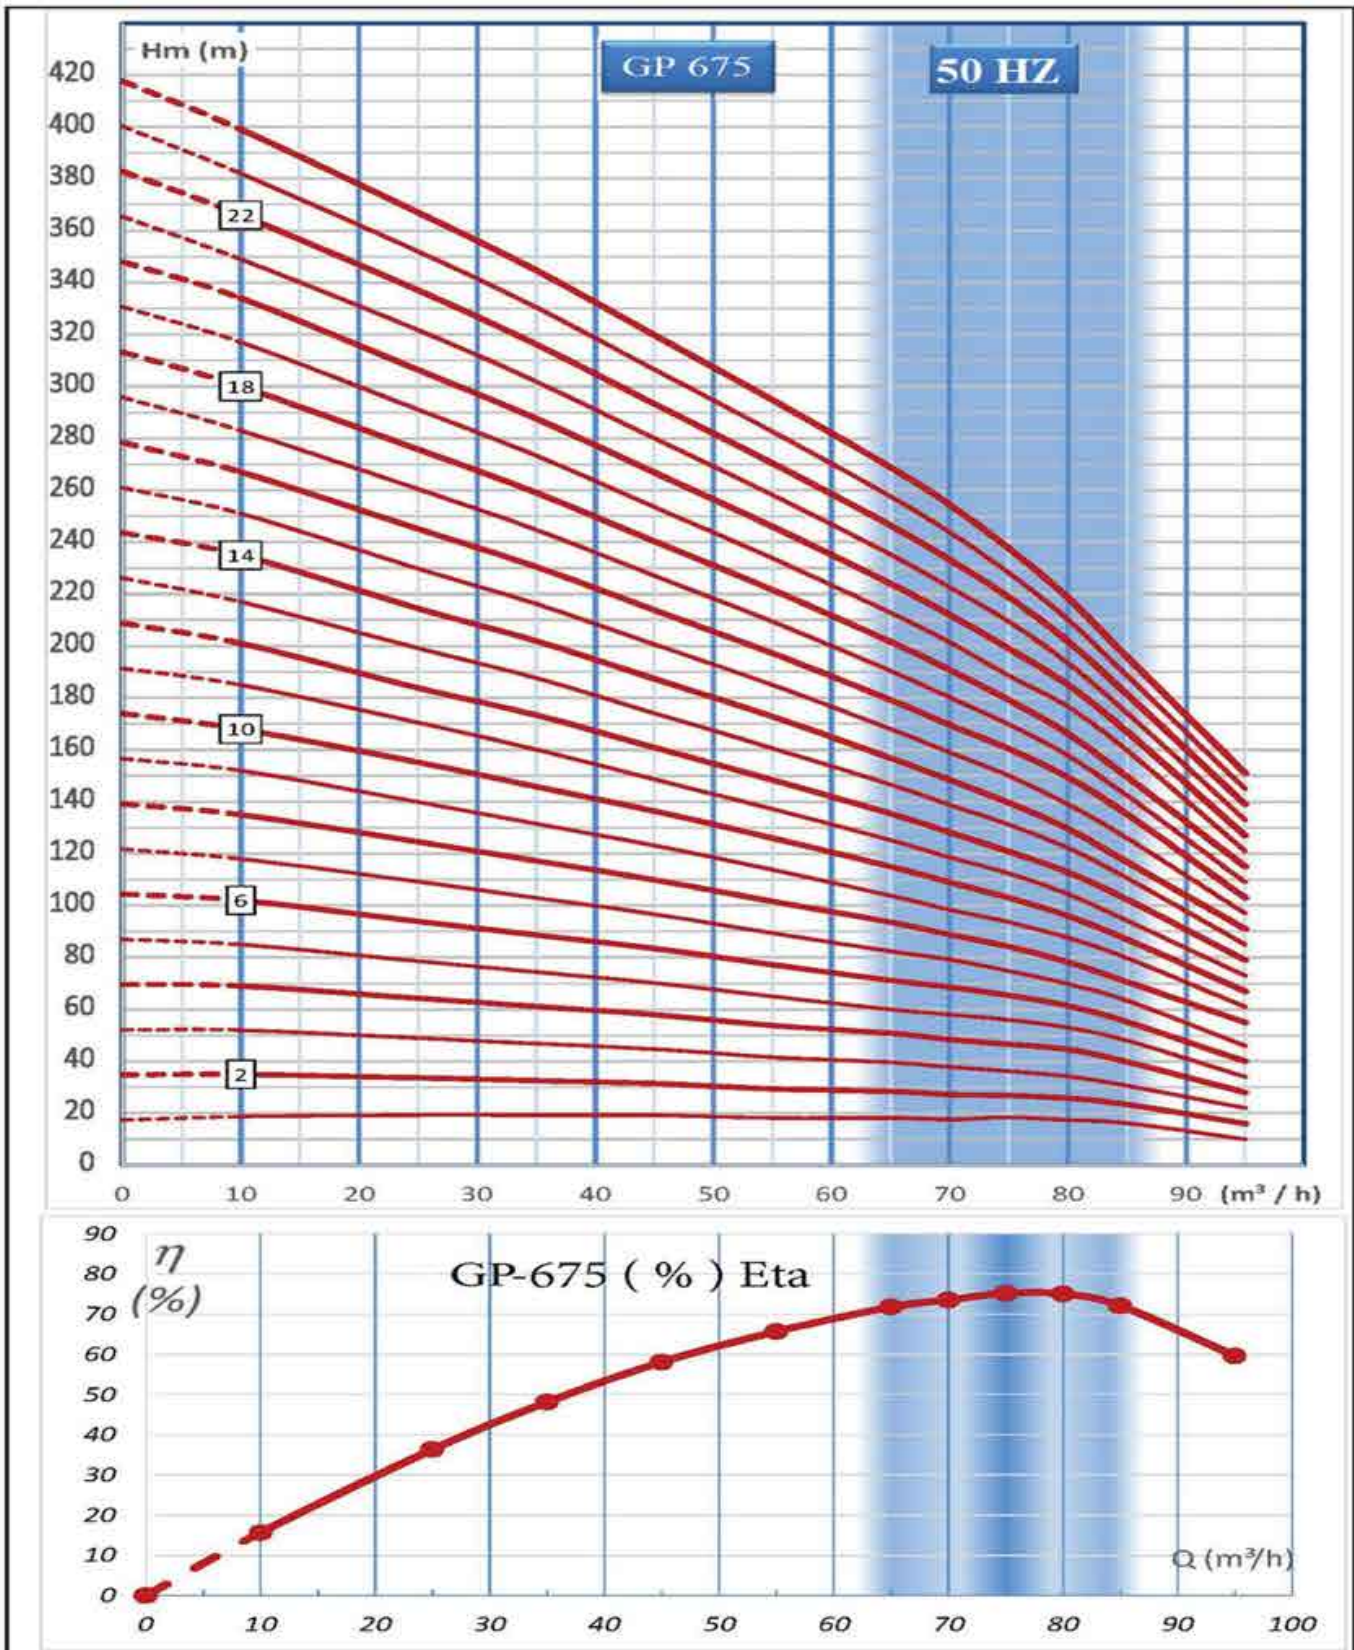

Paslanmaz Dalgıç Pompa / 695 Serisi
Stainless Steel Submersible Pumps / 695 Series 50HZ

Pompa Tipi Pumps Type	Güç Power		Debi / Flow									Pompa Ağırlık	Pompa Boy	Çıkış Out Inch
			m³/h	0.0	80.0	85.0	90.0	95.0	100.0	105.0	115.0	Pump Weight	Pump length	
	Kw	Hp	l/s	0.00	22.22	23.61	25.00	26.39	27.78	29.17	31.94	Kg	cm	
GP 695 / 01	4	5.5	Basma Yüksekliği mSS / Head mSS	17	11	10	9	8	7	6	4	11	44	4"
GP 695 / 02	7.5	10		35	21	19	18	16	14	11	9	14	58	
GP 695 / 03	11	15		52	32	29	28	24	20	17	13	17	72	
GP 695 / 04	15	20		70	42	38	37	32	27	22	18	20	86	
GP 695 / 05	18.5	25		87	53	48	46	40	34	28	22	23	100	
GP 695 / 06	22	30		104	64	58	55	48	41	34	26	26	114	
GP 695 / 07	26	35		122	74	67	64	56	48	39	31	29	128	
GP 695 / 08	30	40		139	85	77	74	64	54	45	35	32	142	
GP 695 / 09	37	50		157	95	86	83	72	61	50	40	35	156	
GP 695 / 10	37	50		174	106	96	92	80	68	56	44	38	170	
GP 695 / 11	45	60		191	117	106	101	88	75	62	48	41	184	
GP 695 / 12	45	60		209	127	115	110	96	82	67	53	44	198	
GP 695 / 13	52	70		226	138	125	120	104	88	73	57	47	213	
GP 695 / 14	52	70		244	148	134	129	112	95	78	62	50	227	
GP 695 / 15	55	75		261	159	144	138	120	102	84	66	53	241	
GP 695 / 16	60	80		278	170	154	147	128	109	90	70	56	255	

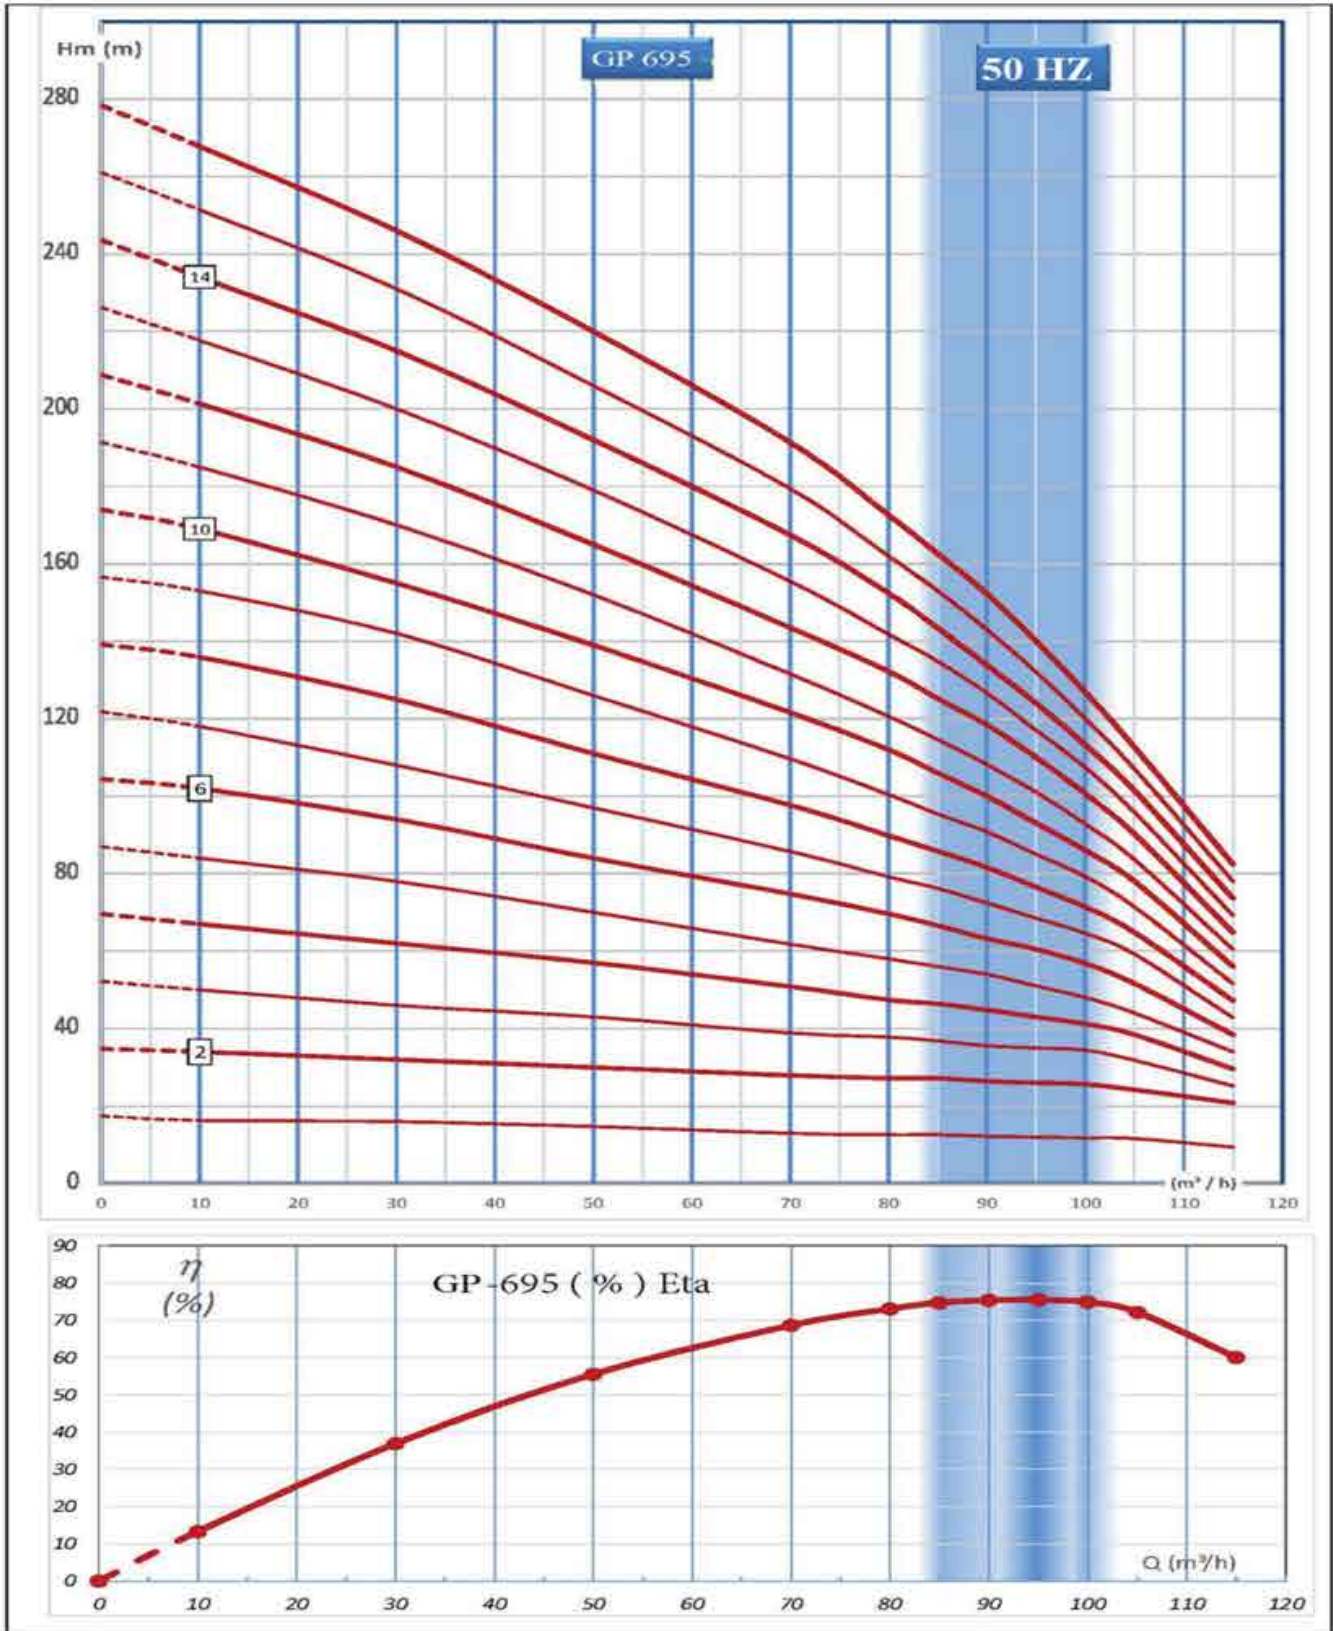




GOLD

Dalgıç Pompa Submersible Pump


Paslanmaz Dalgıç Pompa / 877 Serisi
Stainless Steel Submersible Pumps / 877 Series 50HZ

Pompa Tipi Pumps Type	Güç Power		Debi / Flow										Pompa Ağırlık	Pompa Boy	Çıkış Out Inch
			m³/h	0.0	60.0	70.0	75.0	80.0	85.0	90.0	95.0	100.0	Pump Weight	Pump length	
	l/s	0.00	16.67	19.44	20.83	22.22	23.61	25.00	26.39	27.78	Kg	cm			
GP 877 / 01	4	5.5	Basma Yüksekliği mSS / Head mSS	21	16	14	13	12	11	10	9	8	19	55	5"
GP 877 / 02	7.5	10		36	28	27	26	24	23	22	19	15	23	68	
GP 877 / 03	11	15		55	42	40	39	36	35	34	28	23	27	81	
GP 877 / 04	15	20		73	56	53	52	48	46	45	38	32	31	94	
GP 877 / 05	18.5	25		93	70	66	65	60	58	57	47	40	35	107	
GP 877 / 06	22	30		110	83	79	78	72	69	68	57	49	38	119	
GP 877 / 07	26	35		130	97	92	91	84	81	80	66	57	42	132	
GP 877 / 08	30	40		149	111	105	104	96	92	91	76	66	46	145	
GP 877 / 09	30	40		165	124	118	117	108	104	103	85	74	50	158	
GP 877 / 10	37	50		185	138	131	130	120	115	114	95	84	54	171	
GP 877 / 11	37	50		204	152	144	143	132	127	126	104	91	57	183	
GP 877 / 12	45	60		221	165	157	156	144	138	137	114	100	61	196	
GP 877 / 13	52	70		233	179	170	169	156	150	149	123	108	65	209	
GP 877 / 14	52	70		248	193	183	182	168	161	160	133	117	69	222	
GP 877 / 15	55	75		266	207	196	195	180	173	172	142	125	73	235	
GP 877 / 16	60	80		294	220	209	208	192	184	183	152	134	76	247	
GP 877 / 17	66	90		314	234	222	221	204	196	195	161	142	80	260	
GP 877 / 18	66	90		332	247	235	234	216	207	206	171	151	84	273	
GP 877 / 19	75	100		350	261	248	247	228	219	218	180	159	88	286	
GP 877 / 20	75	100		368	274	261	260	240	230	229	190	168	92	299	
GP 877 / 21	81	110		387	288	274	273	252	242	241	199	176	95	311	
GP 877 / 22	81	110		407	301	287	286	264	253	252	209	185	99	324	
GP 877 / 23	92	125		427	315	300	299	276	265	246	218	193	103	337	
GP 877 / 24	92	125		447	328	313	312	288	276	275	228	202	107	350	

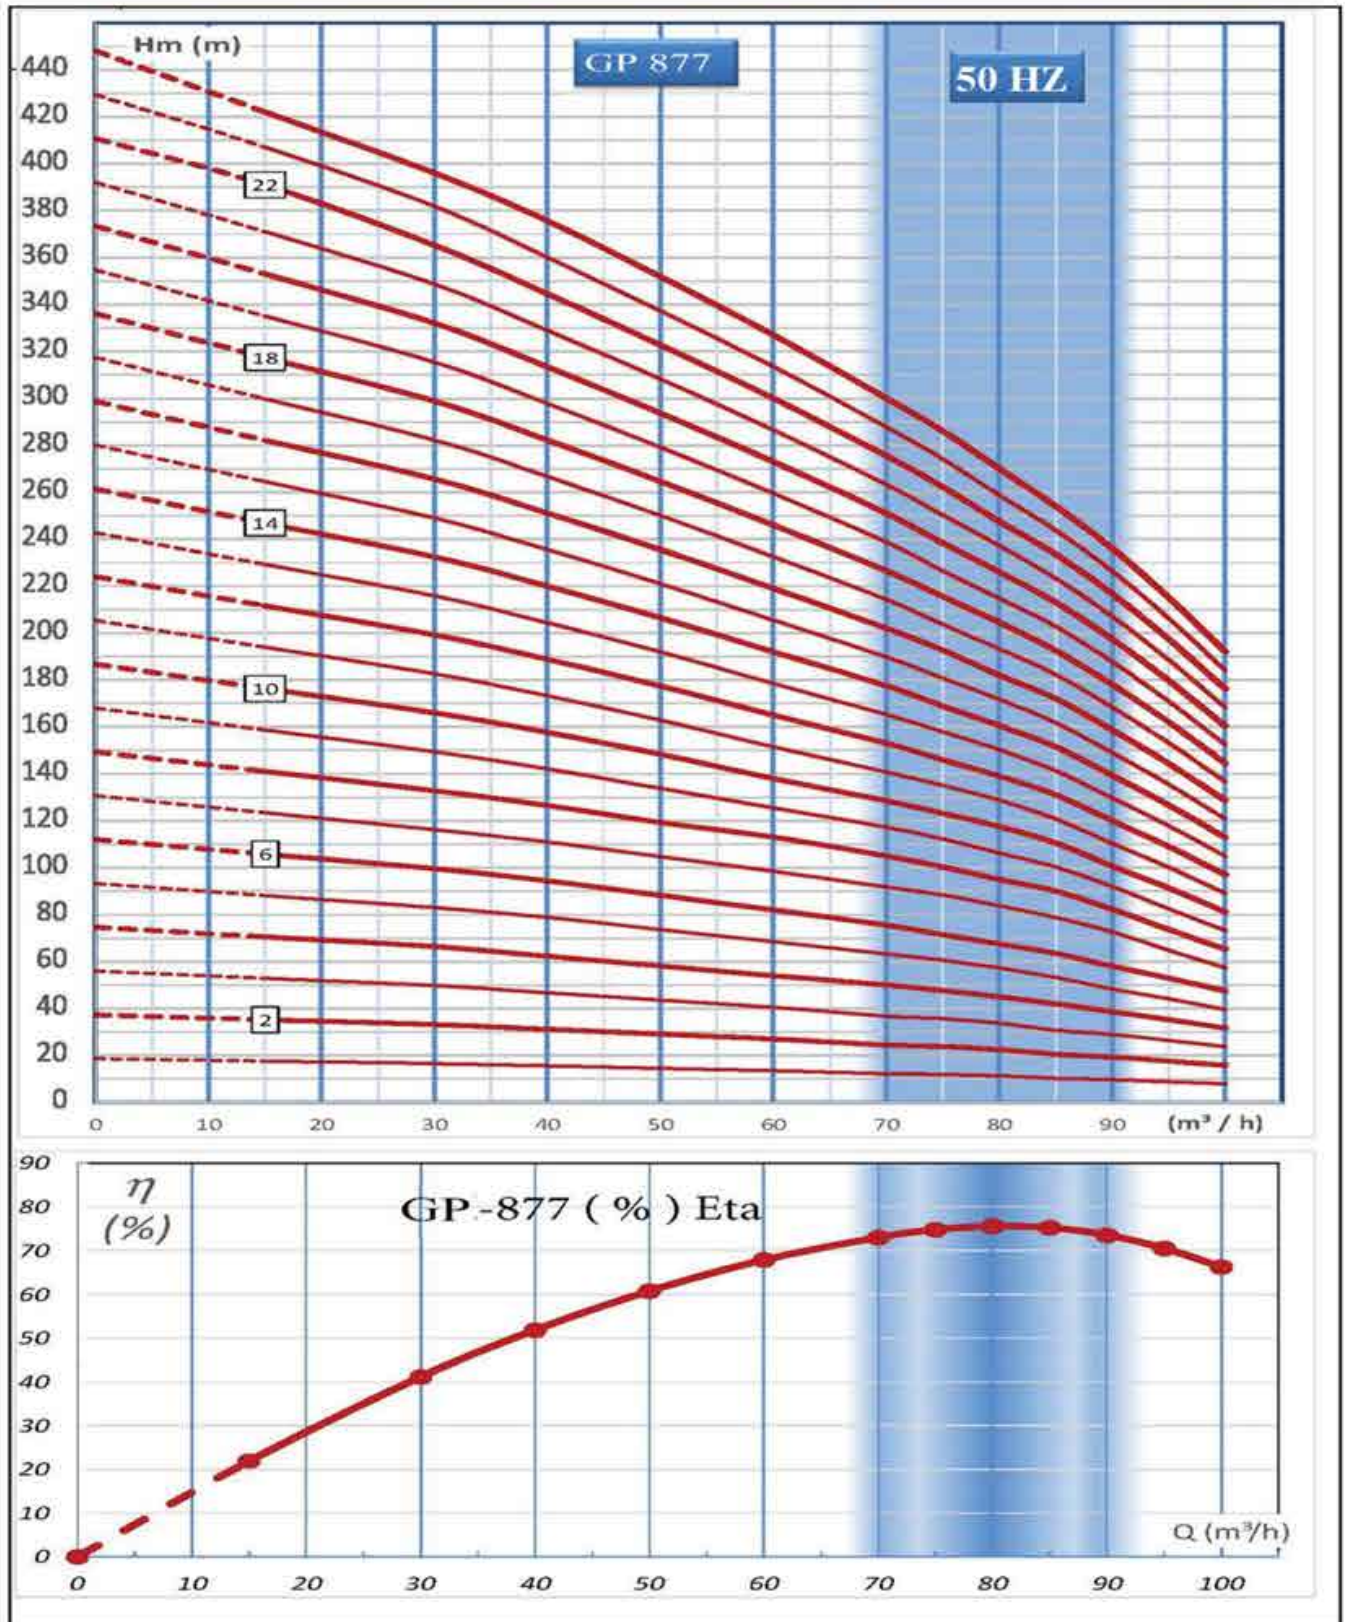

Paslanmaz Dalgıç Pompa / 895 Serisi
Stainless Steel Submersible Pumps / 895 Series **50HZ**

Pompa Tipi Pumpes Type	Güç Power		m³/h l/s	Debi / Flow								Pompa Ağırlık Pump Weight	Pompa Boy Pump length	Çıkış Out Inch	
	Kw	Hp		0.0	75.0	90.0	95.0	100.0	105.0	110.0	115.0	120.0	Kg		cm
				0.00	28.83	25.00	26.39	27.78	29.17	30.56	31.94	33.33			
GP 895 / 01	5.5	7.5	Basma Yüksekliği mSS / Head mSS	26	16	15	14	13	12	11	10	9	19	55	5"
GP 895 / 02	9.2	12.5		47	31	29	27	26	25	24	21	19	23	68	
GP 895 / 03	15	20		68	47	44	41	39	37	35	31	29	27	81	
GP 895 / 04	18.5	25		89	63	58	55	52	50	47	42	38	31	94	
GP 895 / 05	22	30		110	78	73	68	65	62	59	52	48	35	107	
GP 895 / 06	30	40		131	94	87	82	79	75	71	63	57	38	119	
GP 895 / 07	37	50		152	109	102	96	92	87	83	73	67	42	132	
GP 895 / 08	37	50		174	125	117	109	105	100	95	84	77	46	145	
GP 895 / 09	45	60		195	141	131	123	118	112	106	94	86	50	158	
GP 895 / 10	45	60		216	156	146	137	131	125	118	105	96	54	171	
GP 895 / 11	52	70		237	172	160	150	144	137	130	115	105	57	183	
GP 895 / 12	55	75		258	188	175	164	157	150	142	126	115	61	196	
GP 895 / 13	60	80		279	203	189	178	170	162	154	136	125	65	209	
GP 895 / 14	66	90		300	219	204	191	183	175	166	147	134	69	222	
GP 895 / 15	75	100		321	234	219	205	196	187	177	157	144	73	235	
GP 895 / 16	75	100		342	250	233	219	209	200	189	167	153	76	247	
GP 895 / 17	81	110		363	266	248	232	223	212	201	178	163	80	260	
GP 895 / 18	92	125		384	281	262	246	236	225	213	188	172	84	273	
GP 895 / 19	92	125		405	297	277	260	249	237	225	199	182	88	286	
GP 895 / 20	92	125		426	313	291	273	262	250	237	209	192	92	299	
GP 895 / 21	110	150		447	328	306	287	275	262	248	220	201	95	311	
GP 895 / 22	110	150		468	344	321	301	288	275	260	230	211	99	324	
GP 895 / 23	110	150		490	359	328	314	301	287	272	241	220	103	337	
GP 895 / 24	110	150		511	375	342	328	314	299	284	251	230	103	350	

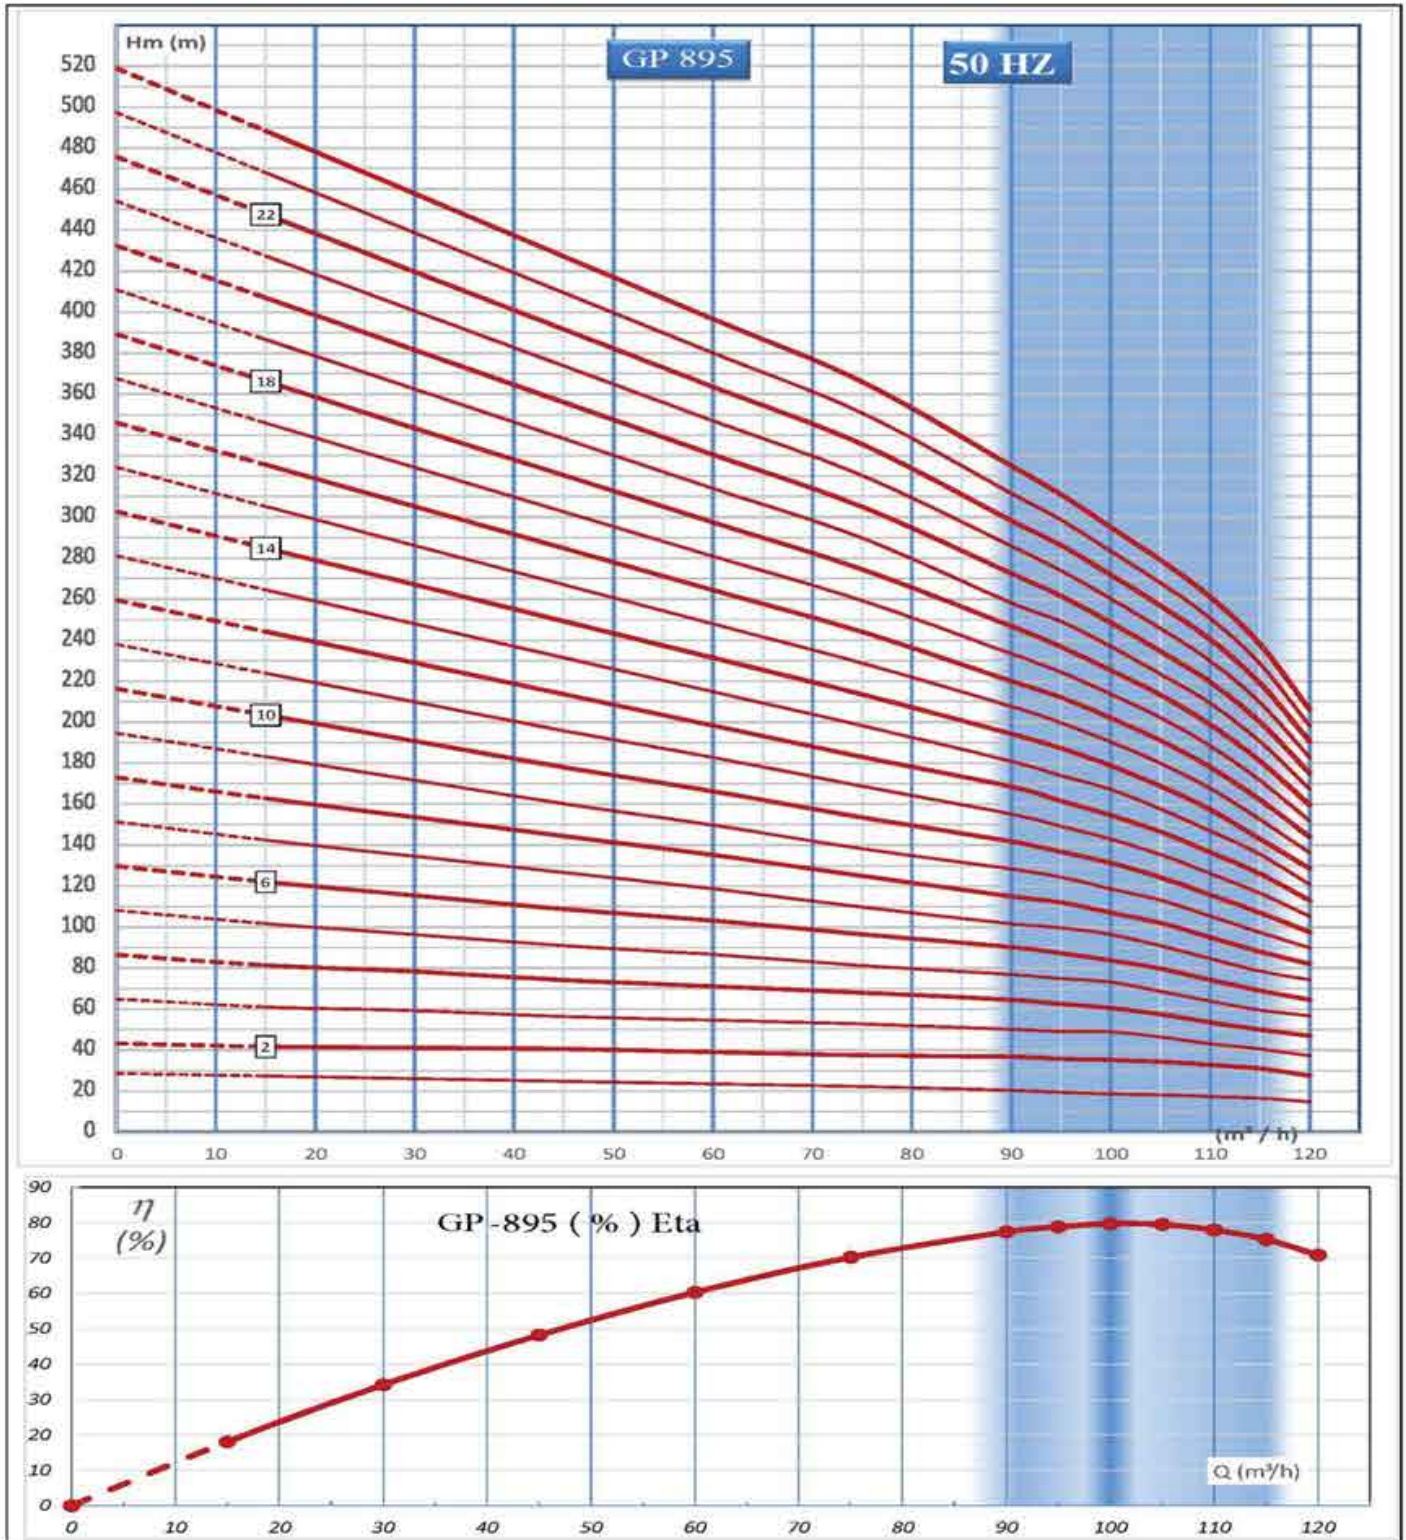


Paslanmaz Dalgıç Pompa / 8110 Serisi

Stainless Steel Submersible Pumps / 8110 Series

50HZ



Pompa Tipi Pumps Type	Güç Power		Debi / Flow								Pompa Ağırlık	Pompa Boy	Çıkış Out Inch
	Kw	Hp	m³/h	0.0	80.0	90.0	100.0	110.0	120.0	130.0	Pump Weight	Pump length	
			l/s	0.00	22.22	25.00	27.78	30.56	33.33	36.11	Kg	cm	
GP 8110 / 01	7.5	10	Basma Yüksekliği mSS / Head mSS	23	22	21	20	18	17	15	25	58	6"
GP 8110 / 02	15	20		46	43	41	39	37	33	30	32	74	
GP 8110 / 03	22	30		69	64	62	59	55	50	45	39	90	
GP 8110 / 04	30	40		91	85	82	78	74	67	60	46	105	
GP 8110 / 05	37	50		114	107	103	98	92	83	75	53	121	
GP 8110 / 06	45	60		137	128	123	117	110	100	90	60	137	
GP 8110 / 07	52	70		160	150	144	137	129	117	105	67	152	
GP 8110 / 08	60	80		183	171	165	156	147	133	120	73	168	
GP 8110 / 09	66	90		206	192	185	176	165	150	135	80	184	
GP 8110 / 10	75	100		229	214	206	195	184	167	150	87	199	
GP 8110 / 11	81	110		251	235	226	215	202	183	165	94	215	
GP 8110 / 12	92	125		274	256	247	234	221	200	180	94	231	
GP 8110 / 13	110	150		297	278	267	254	239	217	195	94	247	
GP 8110 / 14	110	150		320	299	288	273	257	233	210	101	262	
GP 8110 / 15	110	150		343	320	309	293	276	250	225	108	278	
GP 8110 / 16	129	175		366	342	329	312	294	267	240	115	294	
GP 8110 / 17	129	175		388	363	350	332	313	283	255	122	309	
GP 8110 / 18	147	200		411	385	370	351	331	300	270	129	325	
GP 8110 / 19	147	200		434	406	391	371	349	317	285	136	341	
GP 8110 / 20	165	200		457	427	411	390	368	333	300	142	356	

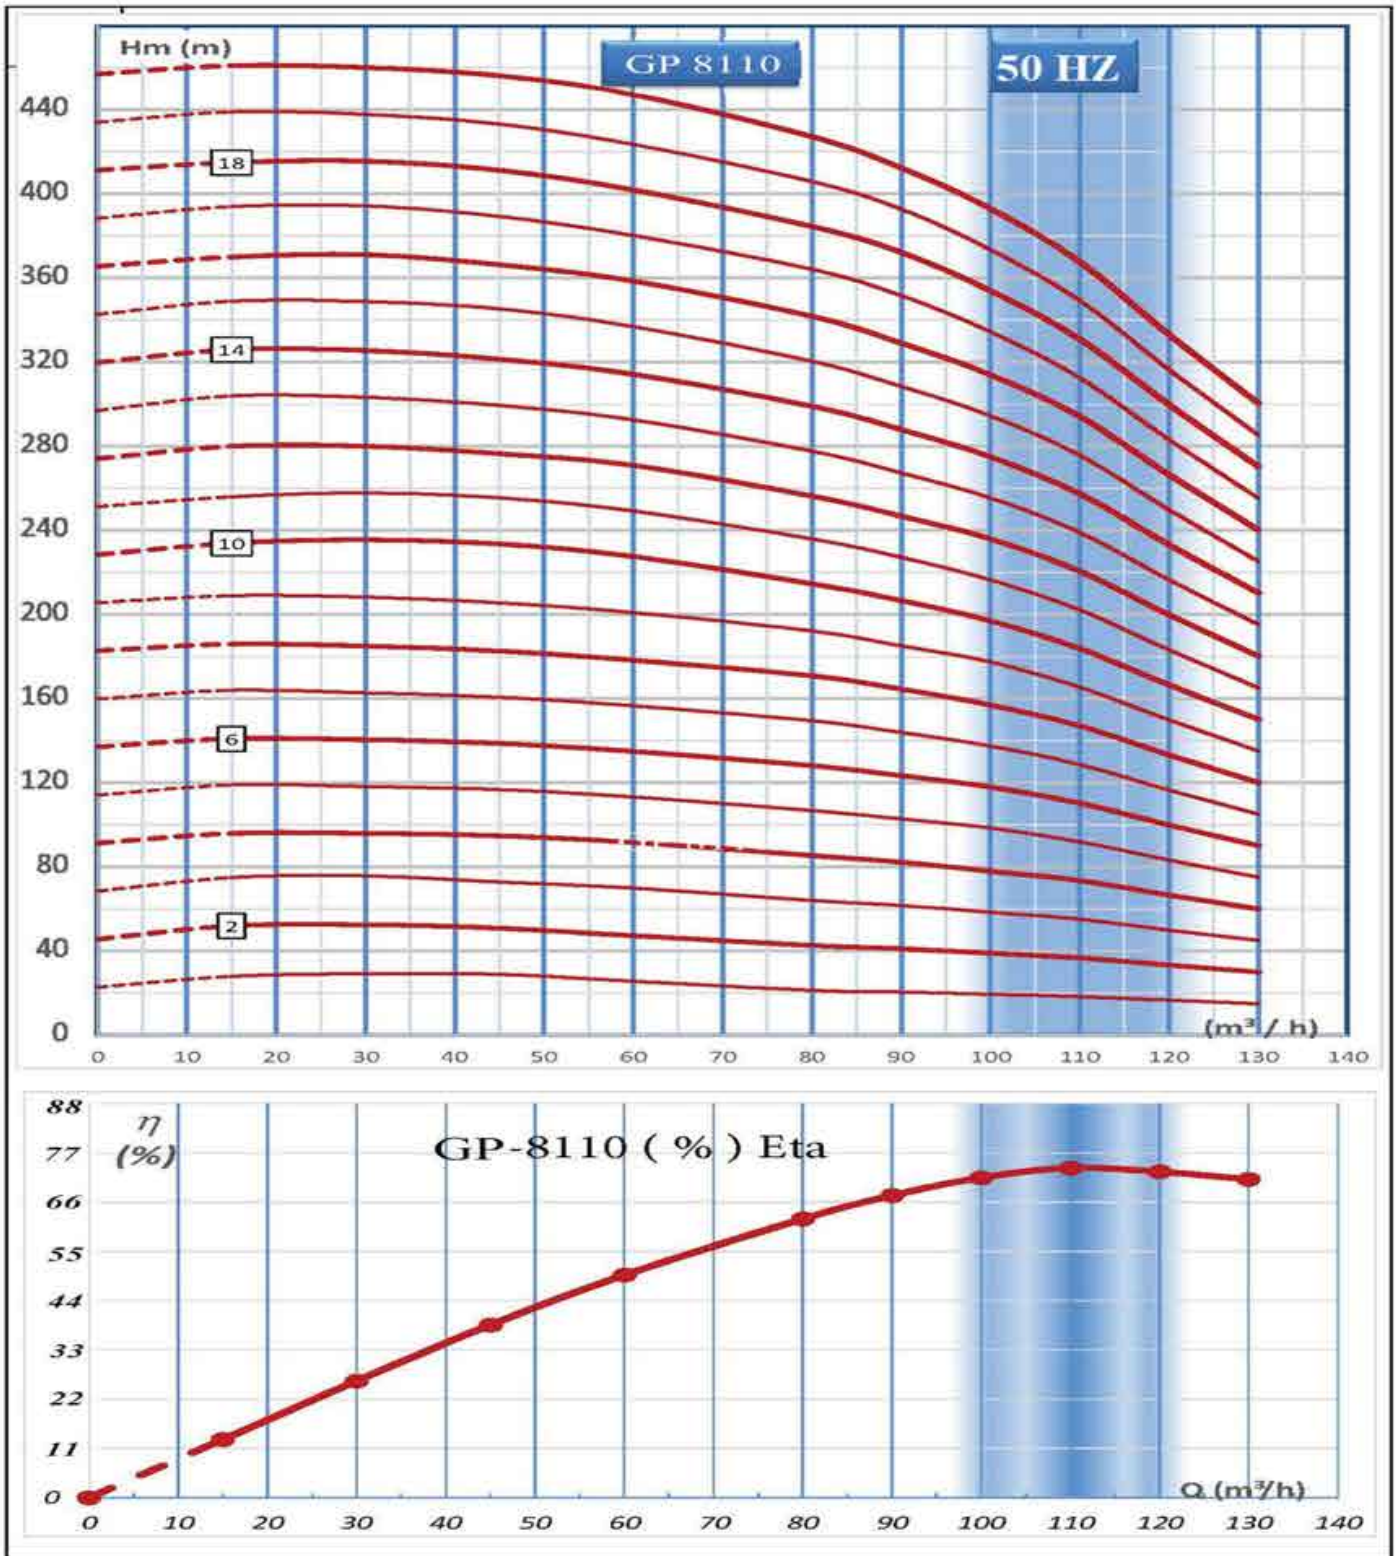

Paslanmaz Dalgıç Pompa /8125 Serisi

Stainless Steel Submersible Pumps /8125 Series 50HZ


Pompa Tipi Pumps Type	Güç Power		Debi / Flow								Pompa Ağırlık		Pompa Boy		Çıkış Out Inch
	Kw	Hp	m³/h	0.0	90.0	110.0	126.0	140.0	150.0	160.0	Pump Weight	Pump Length			
			l/s	0.00	25.00	30.56	35.00	38.89	41.67	44.44	Kg	cm			
GP 8125 / 01/K	7.5	10	Basma Yüksekliği mSS / Head mSS	21	16	15	13	10	8	6	25	58	6"		
GP 8125 / 01	11	15		30	23	21	19	17	15	13	25	58			
GP 8125 / 02/KK	13	17.5		40	33	30	26	20	16	11	32	74			
GP 8125 / 02/K	18.5	25		49	40	37	32	28	24	19	32	74			
GP 8125 / 02	22	30		58	48	44	40	36	32	28	32	74			
GP 8125 / 03/KK	22	30		69	58	53	46	39	32	25	39	90			
GP 8125 / 03/K	26	35		77	64	59	53	46	39	33	39	90			
GP 8125 / 03	30	40		88	72	66	61	54	48	42	39	90			
GP 8125 / 04/KK	37	50		98	82	75	66	57	48	39	46	105			
GP 8125 / 04/K	37	50		107	89	82	74	64	56	47	46	105			
GP 8125 / 04	45	60		116	96	88	81	72	64	55	46	105			
GP 8125 / 05/KK	45	60		126	107	97	87	75	65	52	53	121			
GP 8125 / 05/K	45	60		134	114	104	94	83	72	61	53	121			
GP 8125 / 05	52	70		147	121	112	103	92	82	70	53	121			
GP 8125 / 06/KK	52	70		155	131	120	108	93	81	67	60	137			
GP 8125 / 06/K	52	70		164	138	127	115	101	88	75	60	137			
GP 8125 / 06	60	80		175	146	135	124	110	98	84	60	137			
GP 8125 / 07/KK	60	80		184	155	142	128	113	97	81	67	152			
GP 8125 / 07/K	66	90		193	162	149	135	119	105	89	67	152			
GP 8125 / 07	66	90		204	170	158	144	129	115	99	67	152			
GP 8125 / 08/KK	75	100		213	179	165	149	131	114	95	73	168			
GP 8125 / 08/K	75	100		221	186	172	156	139	122	104	73	168			
GP 8125 / 08	80	110		231	193	179	164	145	130	111	73	168			
GP 8125 / 09/KK	80	110		241	205	188	170	150	131	112	80	184			
GP 8125 / 09/K	92	125		249	212	196	178	158	140	119	80	184			
GP 8125 / 09	92	125		259	217	202	185	166	147	127	80	184			
GP 8125 / 10/KK	92	125		271	228	209	190	167	146	123	87	199			
GP 8125 / 10/K	92	125		277	235	216	197	175	155	131	87	199			
GP 8125 / 10	110	150		286	242	223	204	182	162	139	87	199			
GP 8125 / 11	129	175		318	267	247	226	201	179	156	94	215			
GP 8125 / 12	129	175		347	293	271	249	222	199	172	94	231			
GP 8125 / 13	129	175		375	316	292	267	239	213	183	94	247			
GP 8125 / 14	147	200		405	341	316	289	260	230	198	101	262			
GP 8125 / 15	147	200		432	365	337	307	275	244	211	108	278			

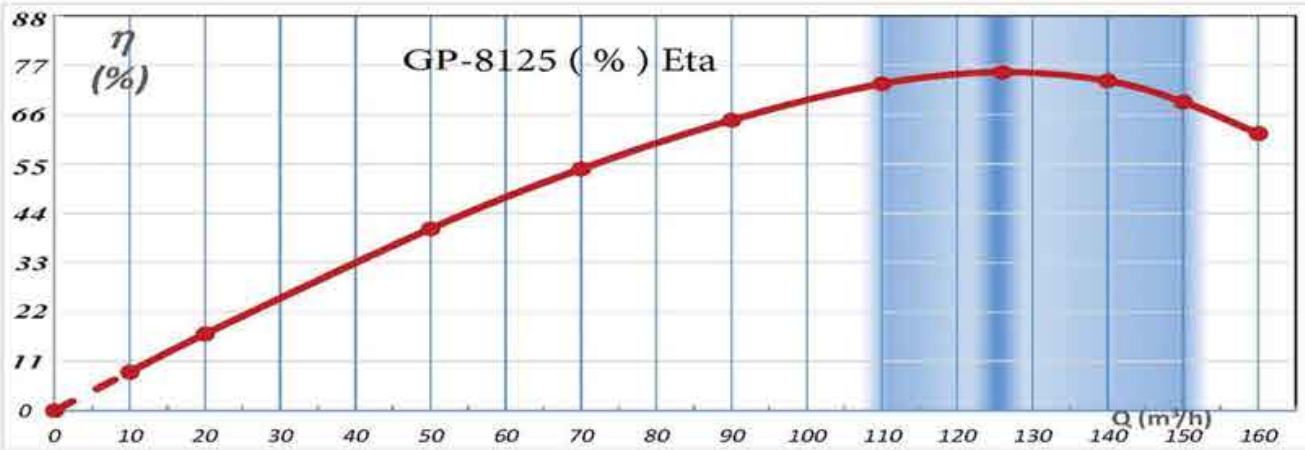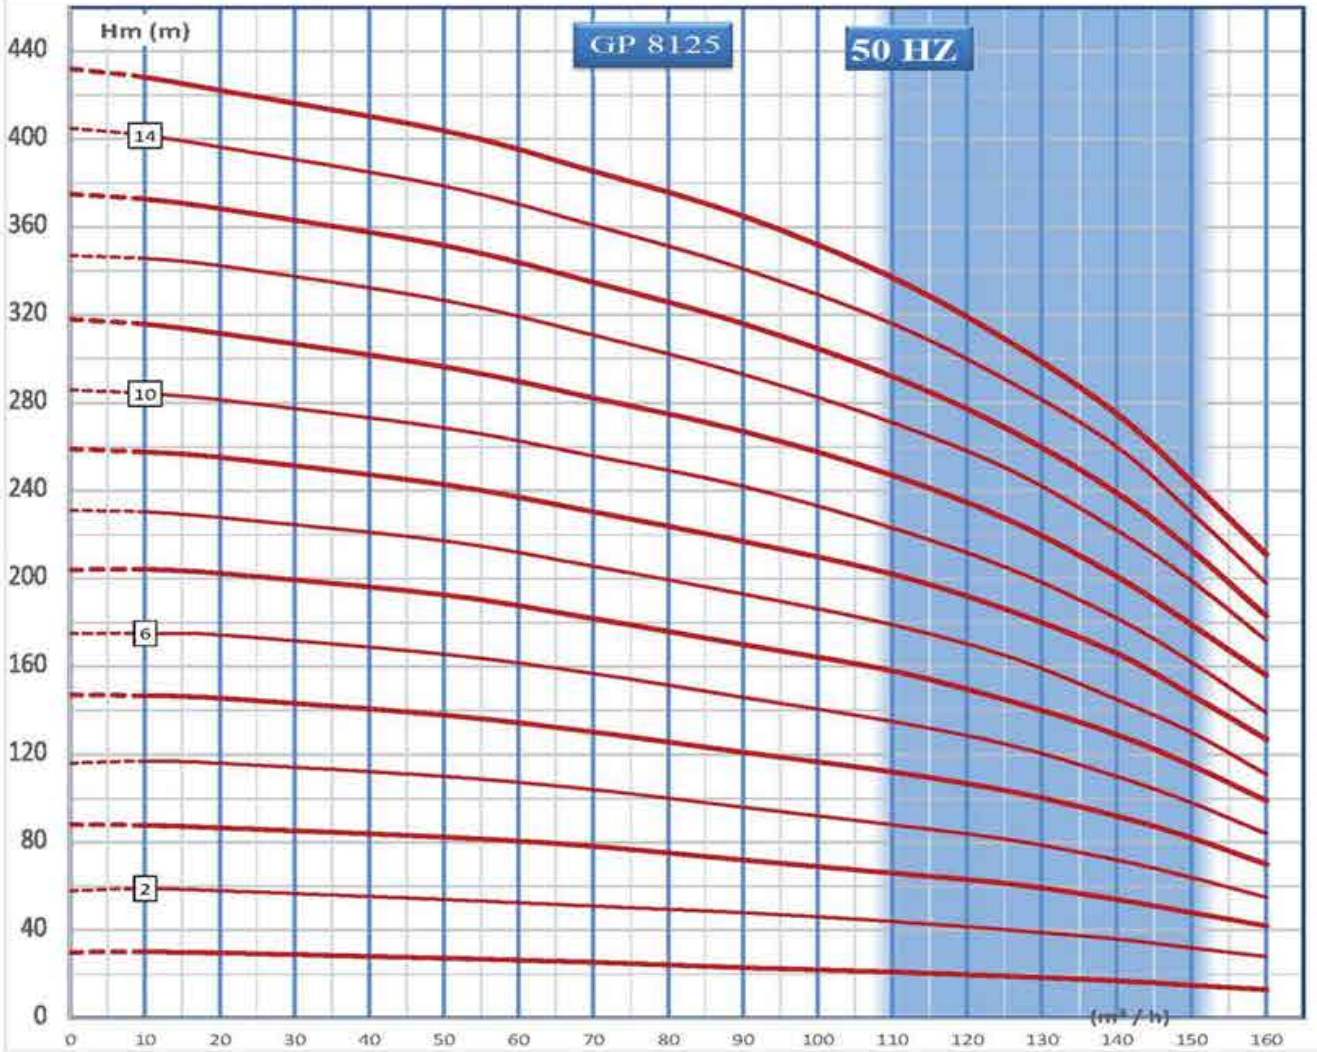

Paslanmaz Dalgıç Pompa /8160 Serisi
Stainless Steel Submersible Pumps /8160 Series

50HZ

Pompa Tipi Pumps Type	Güç Power		Debi / Flow										Pompa Ağırlık	Pompa Boy	Çıkış Out Inch
	Kw	Hp	m³/h	0.0	120.0	140.0	150.0	160.0	170.0	180.0	200.0	220.0	Pump Weight	Pump length	
			l/s	0.00	33.33	38.89	41.67	44.44	47.22	50.00	55.56	61.11	Kg	cm	
GP 8160 / 01/K	9.2	12.5	Basma Yüksekliği mSS / Head mSS	24	19	17	15	14	13	12	11	7	25	58	6"
GP 8160 / 01	13	17.5		33	25	23	22	21	20	19	18	14	25	58	
GP 8160 / 02/KK	18.5	25		47	38	33	31	30	29	27	26	15	32	74	
GP 8160 / 02/K	22	30		57	44	39	38	37	35	33	32	21	32	74	
GP 8160 / 02	26	35		66	50	46	45	43	42	40	39	28	32	74	
GP 8160 / 03/KK	30	40		80	62	56	54	52	50	46	45	29	39	90	
GP 8160 / 03/K	37	50		90	68	62	61	59	56	52	53	35	39	90	
GP 8160 / 03	37	50		99	74	69	68	65	63	62	59	42	39	90	
GP 8160 / 04/KK	45	60		113	87	79	76	73	71	66	64	43	46	105	
GP 8160 / 04/K	45	60		123	93	85	83	80	77	72	71	49	46	105	
GP 8160 / 04	52	70		132	99	92	90	86	84	79	78	56	46	105	
GP 8160 / 05/KK	52	70		146	112	101	99	95	92	86	84	57	53	121	
GP 8160 / 05/K	55	75		155	118	107	106	102	98	92	91	63	53	121	
GP 8160 / 05	60	80		165	124	114	113	108	105	99	98	70	53	121	
GP 8160 / 06/KK	66	90		179	137	124	121	116	113	106	103	71	60	137	
GP 8160 / 06/K	75	100		189	143	130	128	123	119	112	110	77	60	137	
GP 8160 / 06	75	100		198	149	137	135	129	126	119	117	84	60	137	
GP 8160 / 07/KK	81	110		212	161	147	144	138	134	125	123	85	67	152	
GP 8160 / 07/K	92	125		221	167	153	151	145	140	131	130	91	67	152	
GP 8160 / 07	92	125		231	173	160	158	152	147	138	137	98	67	152	
GP 8160 / 08/KK	92	125		245	186	170	166	159	155	145	142	99	73	168	
GP 8160 / 08/K	110	150		254	192	176	173	166	161	151	149	105	73	168	
GP 8160 / 08	110	150		264	198	183	180	172	168	158	156	112	73	168	
GP 8160 / 09/KK	110	150		278	211	193	189	181	176	166	162	113	80	184	
GP 8160 / 09/K	110	150		288	217	199	196	188	182	172	169	119	80	184	
GP 8160 / 09	110	150		297	223	206	203	194	189	178	176	126	80	184	
GP 8160 / 10/KK	110	150		311	236	216	211	202	197	185	181	127	87	199	
GP 8160 / 10/K	129	175		320	242	222	218	209	203	192	188	133	87	199	
GP 8160 / 10	129	175		330	248	229	225	215	210	198	195	140	87	199	
GP 8160 / 11/KK	129	175		344	260	239	234	224	218	204	202	141	94	215	
GP 8160 / 11/K	129	175		353	266	245	241	231	224	211	208	144	94	215	
GP 8160 / 11	147	200		363	272	252	248	237	231	217	215	154	94	215	
GP 8160 / 12	147	200		396	297	275	270	258	252	237	234	168	94	231	
GP 8160 / 13	166	225		429	322	297	293	280	273	257	254	182	94	247	

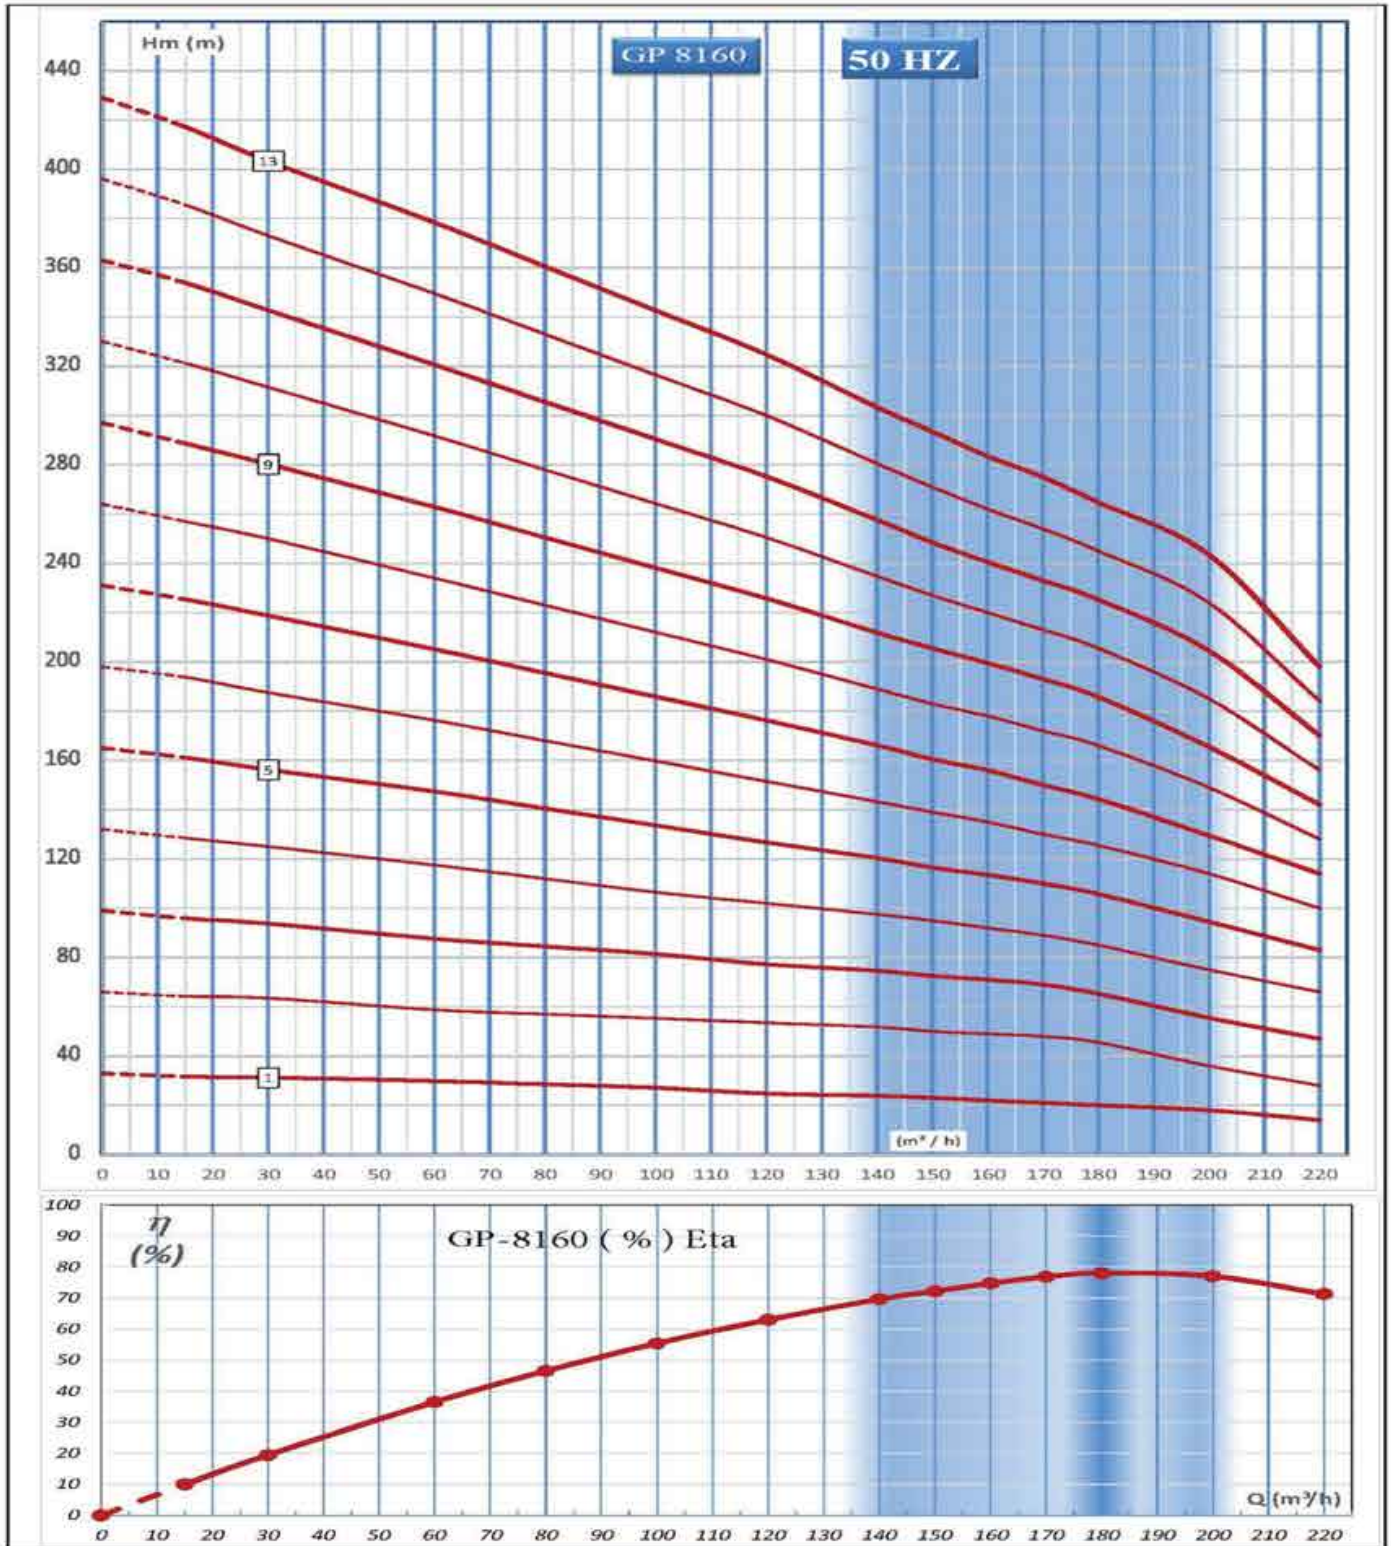


Paslanmaz Dalgıç Pompa / 10216 Serisi

Stainless Steel Submersible Pumps / 10216 Series

50HZ

Pompa Tipi Pumps Type	Güç Power		Debi / Flow								Pompa Ağırlık	Pompa Boy	Çıkış Out Inch
			m³/h	0.0	180.0	200.0	210.0	225.0	240.0	270.0	Pump Weight	Pump length	
	Kw	Hp	l/s	0.00	50.00	55.56	58.33	62.50	66.67	75.00	Kg	cm	
GP 10216 / 01/K	15	20	Basma Yüksekliği mSS / Head mSS	28	18	17	16	14	10	4	28	71	6"
GP 10216 / 01	18.5	25		39	26	24	22	21	19	13	28	71	
GP 10216 / 02/KK	30	40		53	37	34	30	27	21	15	40	88	
GP 10216 / 02/K	37	50		63	44	40	37	33	28	24	40	88	
GP 10216 / 02	37	50		79	51	47	44	41	36	32	40	88	
GP 10216 / 03/KK	45	60		93	62	58	53	47	39	34	51	106	
GP 10216 / 03/K	52	70		103	70	65	60	55	47	42	51	106	
GP 10216 / 03	55	75		119	76	71	66	61	54	51	51	106	
GP 10216 / 04/KK	66	90		132	90	84	78	70	59	50	63	123	
GP 10216 / 04/K	75	100		143	96	90	84	77	66	60	63	123	
GP 10216 / 04	75	100		154	104	97	91	84	74	68	63	123	
GP 10216 / 05/KK	92	125		171	115	108	100	91	77	70	75	141	
GP 10216 / 05/K	92	125		182	122	114	106	97	84	78	75	141	
GP 10216 / 05	92	125		192	129	121	114	105	92	85	75	141	
GP 10216 / 06/KK	110	150		211	141	131	123	111	96	88	87	158	
GP 10216 / 06/K	110	150		222	147	137	128	117	103	96	87	158	
GP 10216 / 06	110	150		232	154	144	136	125	110	104	87	158	
GP 10216 / 07/KK	129	175		252	166	154	143	131	114	107	99	176	
GP 10216 / 07/K	129	175		265	171	161	150	137	117	115	99	176	
GP 10216 / 07	129	175		273	178	166	156	144	126	123	99	176	
GP 10216 / 08/KK	147	200		292	188	176	166	151	127	125	110	193	
GP 10216 / 08/K	147	200		306	196	183	171	156	135	132	110	193	
GP 10216 / 08	147	200		318	201	189	177	161	141	140	110	193	
GP 10216 / 09/KK	166	225		332	216	201	187	171	146	146	122	211	
GP 10216 / 09/K	166	225		345	221	208	194	177	154	152	122	211	
GP 10216 / 09	166	225		358	228	213	199	184	160	150	122	211	
GP 10216 / 10/KK	185	250		373	238	224	208	191	161	155	134	228	
GP 10216 / 10/K	185	250		385	251	236	221	204	176	168	134	228	
GP 10216 / 10	185	250		398	259	242	227	209	184	177	134	228	

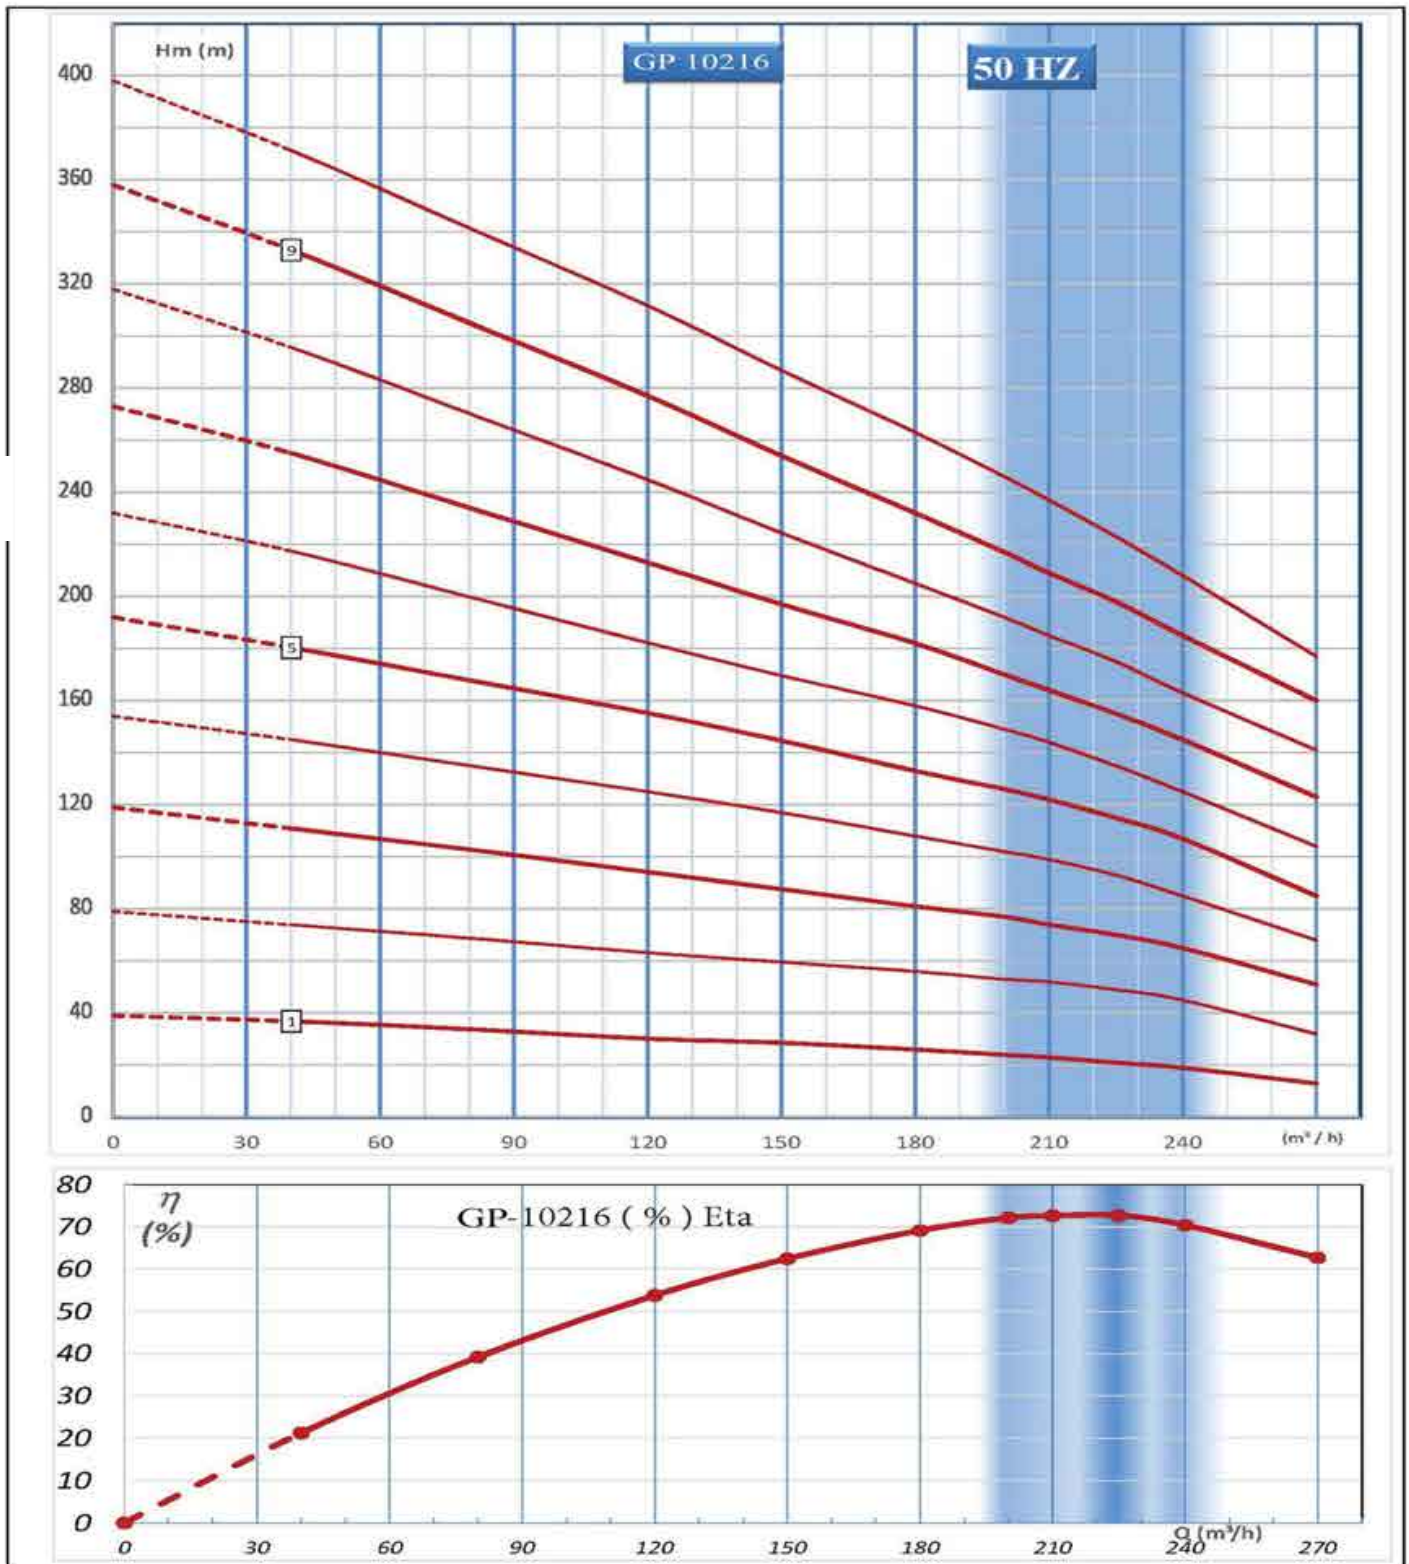

GOLD

Dalgıç Pompa Submersible Pump



GOLD

8-40 HP
1/2" NPT

ATTENTION!
CAUTION: This pump is designed for use in clean water only. Do not use in dirty or corrosive liquids. Always use proper safety procedures when operating this equipment.

WATER FILLED ELECTRIC SUBMERSIBLE MOTORS OF THE REWINDABLE TYPE


- 6" range from 5.5HP to 50HP
- 8" range from 50HP to 150HP
- 10" range from 150HP to 250HP
- Customized winding at 380V, 400V /50Hz





MAIN FEATURES 6"-8"-10" MOTORS

- Motor protection: IP68
- Voltage tolerance: +/- 10%
- Winding: PPC (Polypropylene) for temp. up to 30°C - rewindable in PVC
- Cable: 3 core PVC Flat cable (separate earth cable option)
- Coolant liquid: water + antifreeze coolant (storage temp. until -15°C)
- Coupling: Nema standard for 6" and 8" - Specific connection design on request for 10"
- Rotation sense: bi-directional (anticlock wise factory connection)
- Installation: vertical
- Ready for VSD operation
- Winding for higher temp.: Pe2+Pa (on request)
- Thermal probe: PT100 thermal fitted inside (on request)

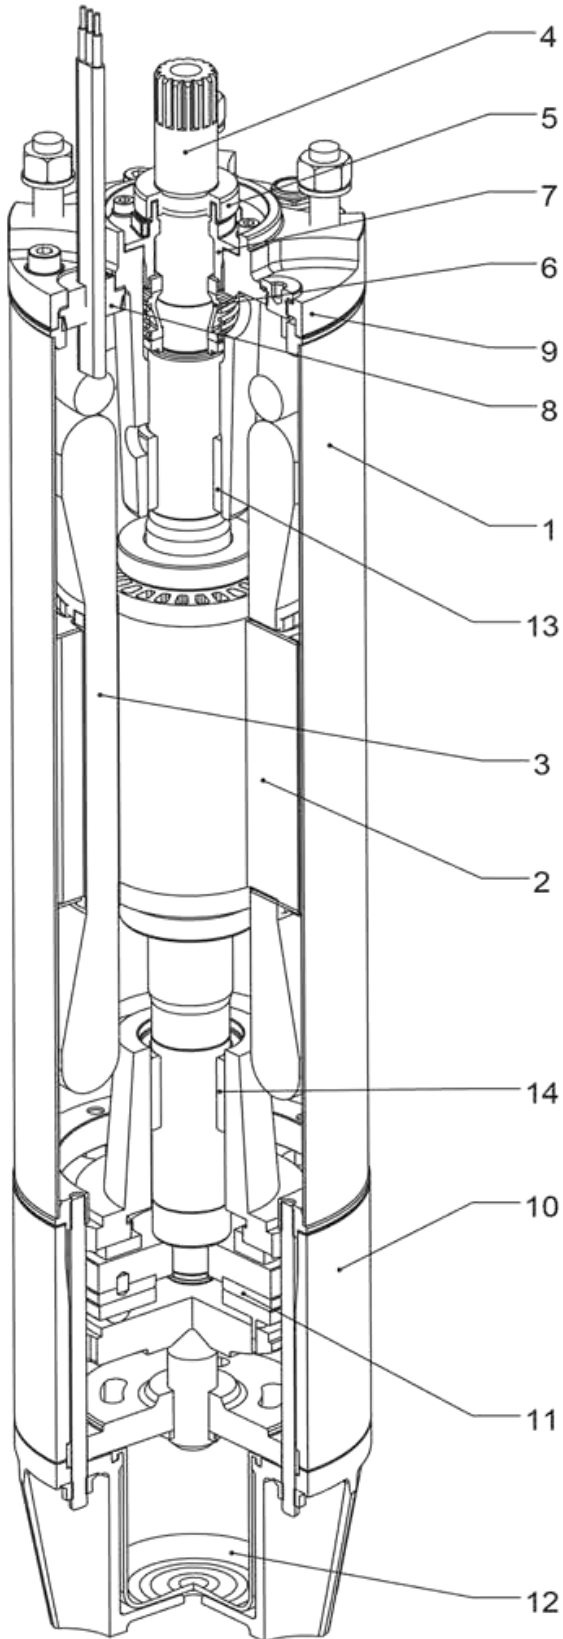


GM 6"

No.	Part	Material
1	Stator casing	Stainless steel AISI 304
2	Stator	Electrical steel
3	Winding	PPC
4	Rotor/shaft	Stainless steel AISI 431
5	Sand guard	SBR
6	Mechanical seal	Silicon carbide Silicon carbide
7	Mechanical seal housing	Polyamide
8	Cable sealing	NBR
9	Upper bracket	GG20 cast iron
10	Lower bracket	GG20 cast iron
11	Thrust bearing	Stainless steel Graphite compound
12	Diaphragm	SBR
13	Upper radial bearing	Graphite compound
14	Lower radial bearing	Graphite compound

GM 8" / GM 10"

No.	Part	Material
1	Stator casing	Stainless steel AISI 304
2	Stator	Electrical steel
3	Winding	PPC
4	Rotor/shaft	Stainless steel AISI 420
5	Sand guard	SBR
6	Mechanical seal	Silicon carbide Silicon carbide
7	Mechanical seal housing	Stainless steel AISI 420
8	Cable sealing	NBR
9	Upper bracket	GG20 cast iron
10	Lower bracket	GG20 cast iron
11	Thrust bearing	Stainless steel Graphite compound
12	Diaphragm	SBR
13	Upper radial bearing	Graphite compound
14	Lower radial bearing	Graphite compound

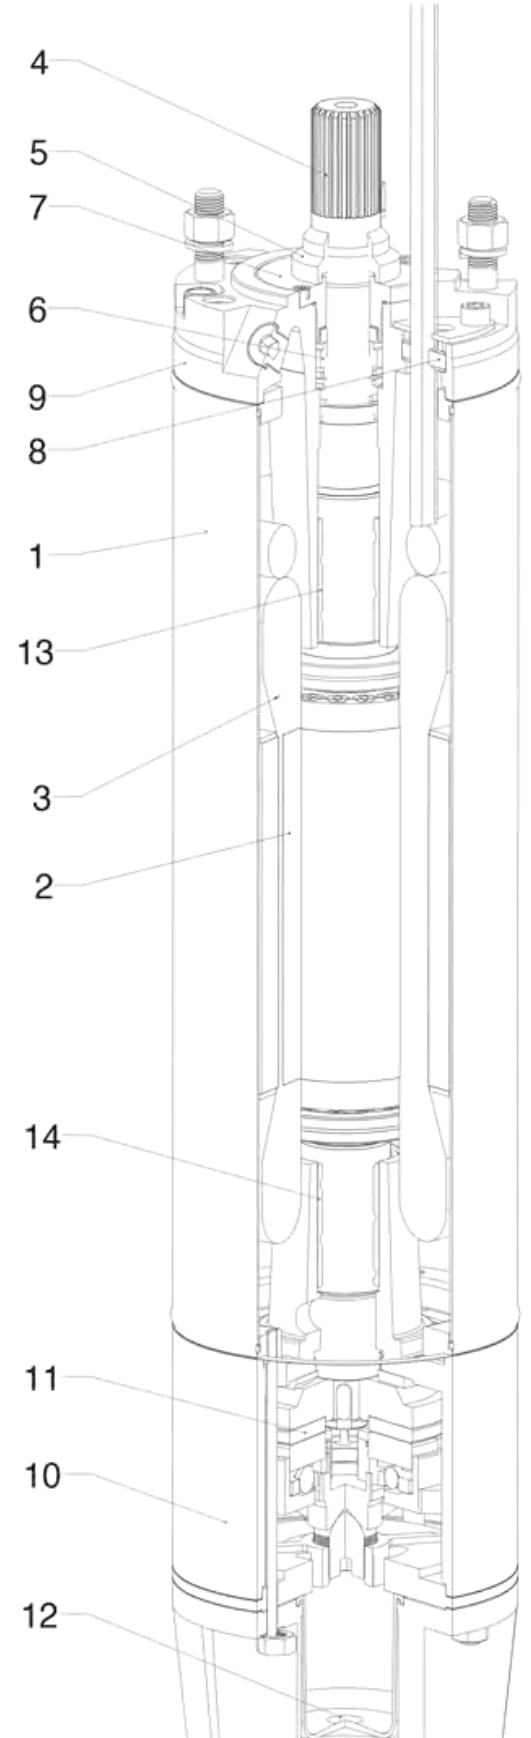

Generously sized and tested AXIAL THRUST BEARING, allowing high axial loads.



Fully balanced and ground ROTOR made by High Precision CNC machines. Thanks to the very low rugosity and the high accuracy of machining process, no bushes are required on 6" motor.



ROTOR in SS AISI 431 with higher properties of corrosion resistance. Only bars of European origin are used.



MECHANICAL SEAL in Silicon Carbide/Silicon Carbide for heavy duty applications mounted as a standard.





MECHANICAL SEAL HOUSING made of corrosion proof materials and polyamide for 6" motors.



Motor data 50Hz

6" Motor Type		Nominal Power		Voltage	Efficiency		Power Factor (Cos ϕ)		I n Nominal Current	Ma/Mn	Ia/In			Speed
		HP	kW	[V]	4/4	3/4	4/4	3/4	[A]		DOL	Y/D	Statoric	[rpm]
Three Phase 50Hz	GM65	5,5	4	220	74,7	76,9	0,80	0,735	17,6	1,3	3,5	1,15	2,45	2885
				380					10,2					2885
				400	74,8	75,9	0,75	0,66	10,3	1,4	3,5	1,15	2,45	2895
	GM67	7,5	5,5	220	77,5	78,9	0,795	0,725	23,5	1,9	4,0	1,30	2,6	2880
				380					13,6					2880
				400	77,2	78,2	0,75	0,665	13,7	2,1	4,0	1,35	2,8	2890
	GM610	10	7,5	220	78,6	80,5	0,82	0,76	30,6	1,4	5,1	1,7	3,55	2875
				380					17,7					2890
				400	78,4	80,8	0,77	0,70	17,9	1,6	5,1	1,7	3,6	2890
	GM612	12,5	9,2	220	79,8	81,9	0,82	0,77	37,0	1,4	5,0	1,65	3,5	2875
				380					21,4					2875
				400	80,2	80,9	0,77	0,70	21,5	1,6	4,9	1,65	3,45	2890
	GM615	15	11	220	80,7	82,7	0,82	0,77	43,7	1,6	5,4	1,8	3,75	2870
				380					25,3					2890
				400	80,7	82	0,77	0,71	25,6	1,8	5,4	1,8	3,8	2890
	GM617	17,5	13	220	79,1	80,7	0,82	0,76	52,5	1,3	4,6	1,55	3,2	2870
				380					30,4					2885
				400	79,3	79,9	0,765	0,69	30,9	1,4	4,6	1,55	3,25	2885
	GM620	20	15	220	80,1	82,5	0,825	0,76	59,6	1,5	5,0	1,65	3,5	2870
				380					34,5					2890
				400	80,1	81	0,775	0,70	34,9	1,7	5,0	1,65	3,5	2890
	GM625	25	18,5	220	81,8	83,4	0,805	0,735	73,6	1,4	4,7	1,55	3,3	2870
				380					42,6					2885
				400	81,9	83,5	0,75	0,67	43,5	1,6	4,7	1,55	3,3	2885
	GM630	30	22	220	81,4	82,3	0,82	0,75	86,4	1,8	5,0	1,65	3,5	2860
				380					50,0					2880
				400	81,9	82,5	0,77	0,695	50,3	2,0	5,0	1,65	3,5	2880
	GM635	35	26	220	83,2	84,5	0,81	0,75	101,2	1,5	4,8	1,6	3,35	2860
				380					58,6					2880
				400	83,4	84,6	0,76	0,685	59,2	1,7	4,8	1,6	3,35	2880
	GM640	40	30	220	83,3	84,8	0,795	0,73	118,8	2,0	5,7	1,9	4,0	2870
				380					68,8					2885
				400	83,3	85,2	0,745	0,655	69,7	2,2	5,7	1,9	4,0	2885
	GM650	50	37	220	82,1	84,3	0,81	0,74	146,0	2,4	6,0	2,0	4,2	2860
				380					84,5					2875
				400	82,4	83,4	0,78	0,675	85,2	2,7	6,0	2,0	4,2	2875

Ma=starting torque / Mn=nominal torque / Ia=starting current / In=nominal current

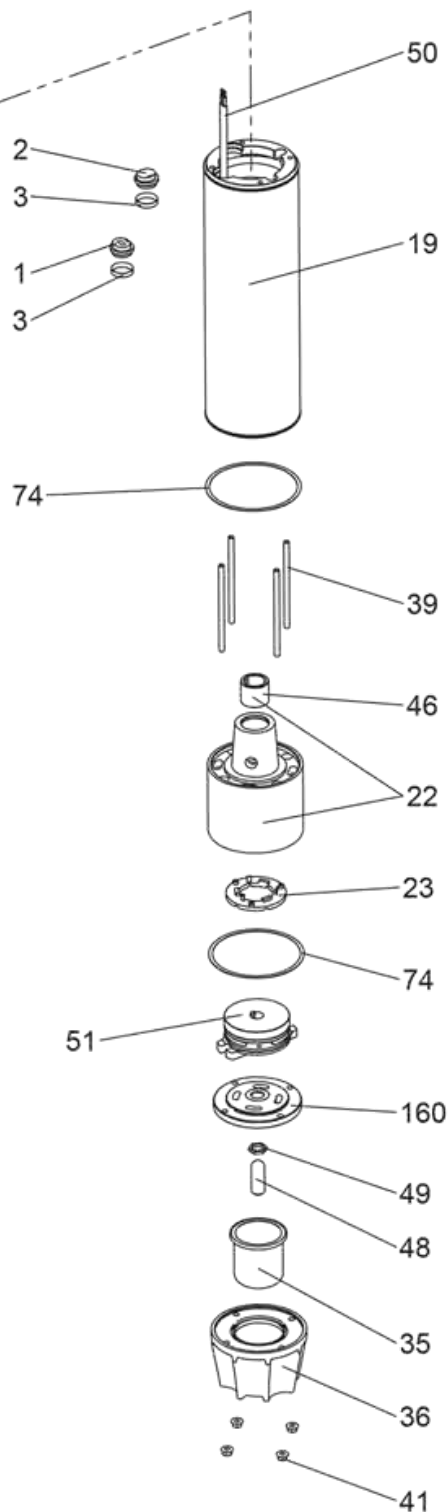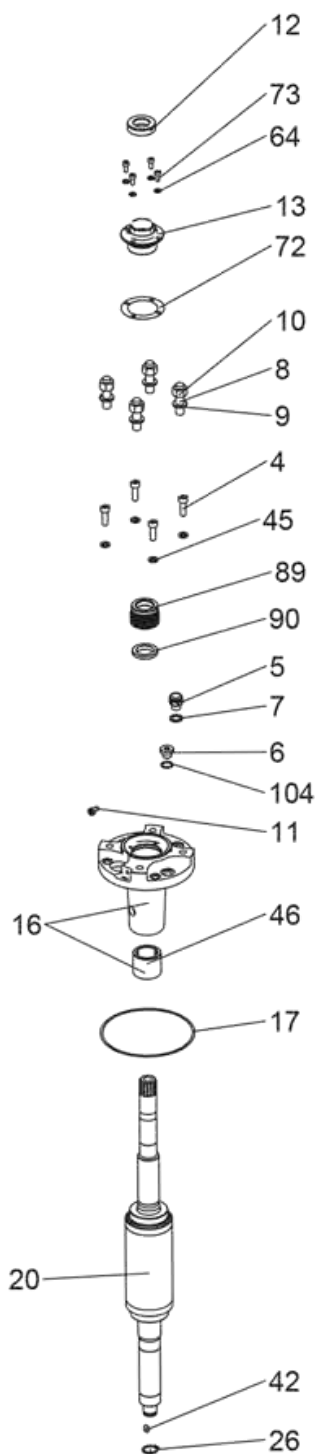


- 12 Sand guard
- 73 Screw
- 64 Washer
- 13 Cover
- 72 Gasket
- 10 Nut
- 8 Stud
- 9 Washer
- 4 Screw
- 45 Washer
- 89 Mechanical seal
- 90 Spacer
- 5 Valve
- 7 Washer
- 6 Plug
- 104 Washer
- 11 Grounding screw
- 16 Upper bracket
- 46 Bushing
- 17 Gasket
- 20 Rotor
- 42 Parallel key
- 26 Retaining ring
- 50 Cable
- 19 Stator
- 3 Cable gland seal
- 2 Cable clamp blind seal
- 1 Cable clamp seal
- 74 Gasket
- 39 Tied rod stud
- 22 Lower bracket
- 23 Counter-thrust ring
- 51 Thrust bearing
- 160 Guide disk
- 49 Nut
- 48 Adjustment screw
- 35 Diaphragm
- 36 Diaphragm cover
- 41 Nut

Motor data 50Hz

8" Motor Type		Nominal Power		Voltage	Efficiency		Power Factor (Cosφ)		I n Nominal Current	Ma/Mn	Ia/I n			Speed
		HP	kW	[V]	4/4	3/4	4/4	3/4	[A]		DOL	Y/D	Statoric	[rpm]
Three Phase 50Hz	GM850	50	37	380	84,2	86,1	0,88	0,850	75,8	1,2	4,74	1,56	3,32	2860
				400	85,2	86,1	0,855	0,81	73,3	1,3	4,90	1,62	3,43	2880
	GM860	60	45	380	84,8	86,6	0,87	0,845	92,7	1,1	4,48	1,48	3,13	2857
				400	85,5	86,6	0,84	0,800	90,2	1,2	4,60	1,52	3,22	2875
	GM875	75	55	380	84,7	85	0,885	0,860	111,8	1,3	4,74	1,56	3,32	2846
				400	85,3	86,6	0,86	0,82	108,2	1,45	4,90	1,62	3,43	2865
	GM880	80	59	380	84,8	87,7	0,875	0,825	120,7	1,3	4,57	1,51	3,20	2871
				400	85,8	86,4	0,845	0,80	117,4	1,45	4,70	1,55	3,29	2886
	GM885	85	63	380	83,4	86,9	0,880	0,85	130,3	1,3	4,53	1,50	3,17	2830
				400	84,4	85,9	0,855	0,815	125,7	1,45	4,70	1,55	3,29	2850
	GM890	90	66	380	83,7	83,7	0,875	0,840	137,0	1,3	4,53	1,50	3,17	2860
				400	85	85	0,84	0,795	133,5	1,45	4,70	1,55	3,29	2880
	GM895	95	70	380	85,5	87,3	0,88	0,85	140,8	1,4	5,06	1,67	3,54	2853
				400	86,2	87,3	0,855	0,805	137,1	1,6	5,20	1,72	3,64	2870
	GM8100	100	75	380	86	87,9	0,875	0,845	151,5	1,4	5,07	1,67	3,55	2856
				400	86,7	88	0,845	0,79	147,6	1,6	5,20	1,72	3,64	2875
	GM8110	110	81	380	86,4	86,9	0,87	0,835	163,8	1,4	5,08	1,68	3,56	2868
				400	87	87	0,84	0,785	160	1,6	5,22	1,73	3,65	2880
	GM8125	125	92	380	86,3	86,2	0,870	0,835	186,0	1,4	5,08	1,68	3,55	2865
				400	87	87	0,84	0,785	181,6	1,6	5,22	1,73	3,65	2880
	GM8150	150	110	380	85	86	0,86	0,85	226	1,6	5,07	2,78	3,55	2880
				400	85,6	85,3	0,86	0,82	219	1,8	5,4	2,9	3,68	2900

Ma=starting torque / Mn=nominal torque / Ia=starting current / In=nominal current

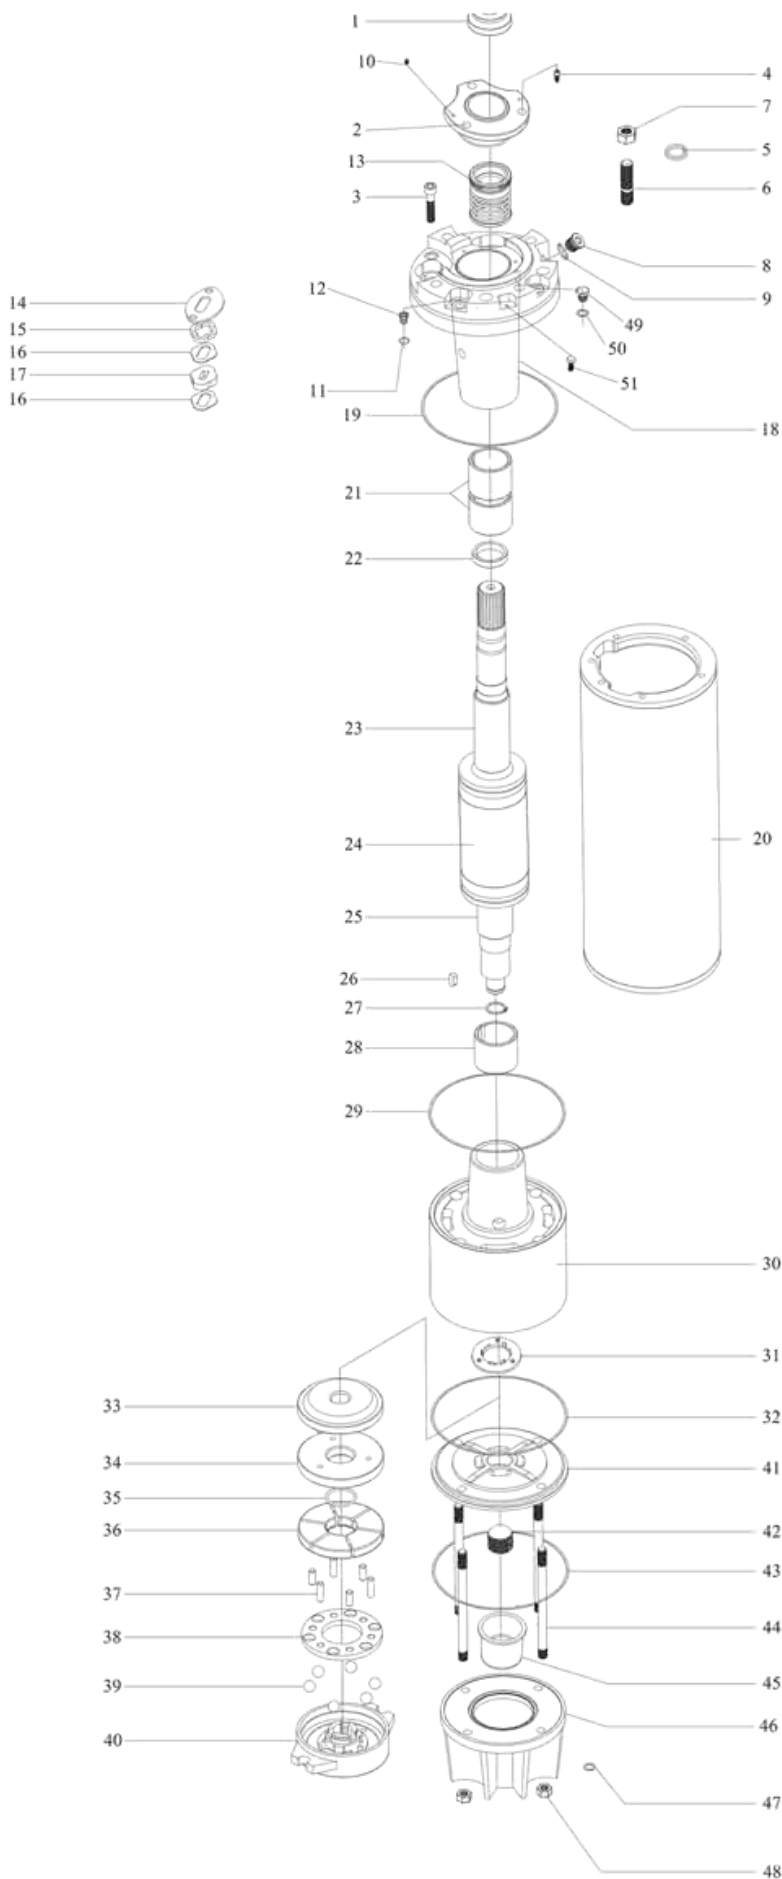


- 1 Sand guard
- 2 Mechanical seal housing
- 3 Screw
- 4 Screw
- 5 Washer
- 6 Stud
- 7 Nut
- 8 Water plug
- 9 O-ring
- 10 Dowel
- 11 Gasket
- 12 Valve
- 13 Mechanical seal
- 14 Cable clamp flange
- 15 Cable clamp plastic
- 16 Cable clamp washer
- 17 Cable clamp seal
- 18 Upper bracket
- 19 Gasket
- 20 Stator casing
- 21 Bushing
- 22 Mechanical seal ring
- 23 Chrome bush
- 24 Rotor
- 25 Chrome bush
- 26 Key
- 27 Circlip
- 28 Bushing
- 29 Gasket
- 30 Lower bracket
- 31 Counter thrust ring
- 32 Gasket
- 33 Disc
- 34 Disc holder
- 35 Oring
- 36 Segment
- 37 Pin
- 38 Bearing support
- 39 Bearing ball
- 40 Bearing box
- 41 Adjustment cover
- 42 Adjustment screw
- 43 Gasket
- 44 Stud
- 45 Diaphragm
- 46 Diaphragm cover
- 47 Washer
- 48 Nut
- 49 PT100 plug
- 50 Gasket
- 51 Earthing screw

Motor data 50Hz

10" Motor Type		Nominal Power		Voltage	Efficiency		Power Factor (Cosφ)		I n Nominal Current	Ma/Mn	Ia/In			Speed
		HP	kW	[V]	4/4	3/4	4/4	3/4	[A]		DOL	Y/D	Statoric	[rpm]
Three Phase 50Hz	GM10150	150	110	380	84,6	85,8	0,875	0,855	226,1	1,8	6,10	2,01	4,27	2897
				400	85,2	86	0,855	0,820	218	2	6,33	2,09	4,43	2910
	GM10175	175	129	380	85,9	86,7	0,880	0,860	261,6	1,35	5,70	1,89	4,01	2914
				400	86,4	86,7	0,860	0,830	252,4	1,5	5,95	1,96	4,16	2925
	GM10200	200	147	380	86,2	87,4	0,880	0,860	301,0	1,45	5,80	1,91	4,05	2911
				400	86	86	0,850	0,820	291	1,6	5,98	1,97	4,19	2920
	GM10225	225	165	380	87,3	88,4	0,870	0,845	330,2	1,5	6,03	1,99	4,22	2916
				400	87,8	88,3	0,840	0,805	321,0	1,65	6,20	2,05	4,34	2925
	GM101250	250	185	380	86,8	87,9	0,880	0,860	368,5	1,7	6,50	2,14	4,54	2914
				400	87,4	88,1	0,860	0,820	357	1,9	6,70	2,21	4,69	2925

Ma=starting torque / Mn=nominal torque / Ia=starting current / In=nominal current

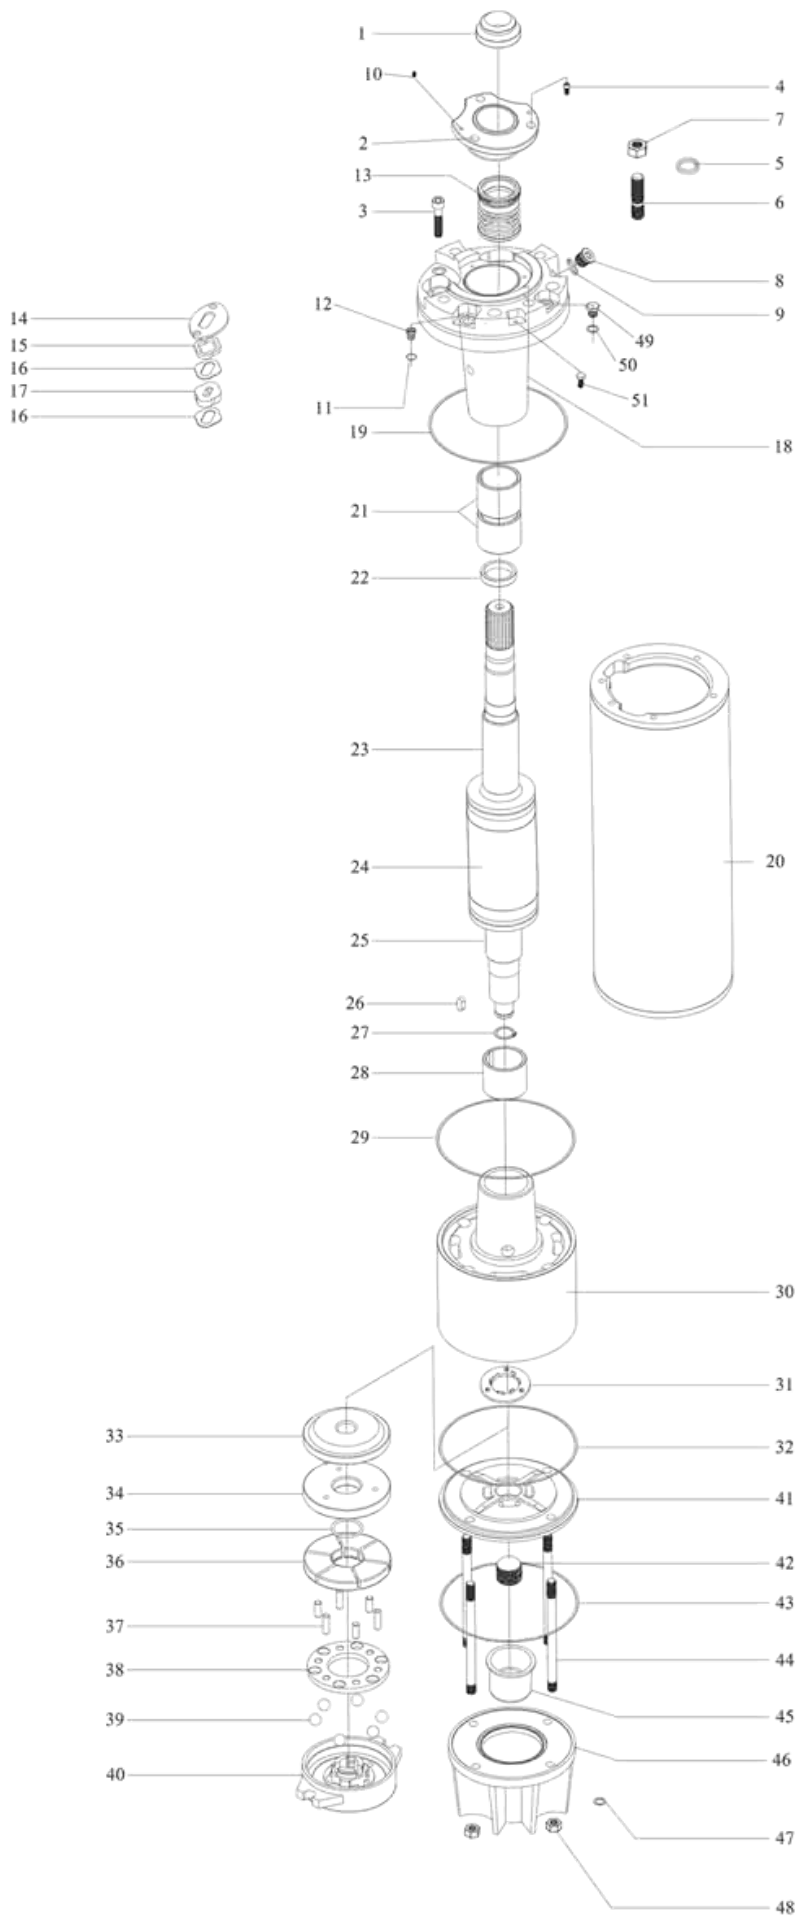


- 1 Sand guard
- 2 Mechanical seal housing
- 3 Screw
- 4 Screw
- 5 Washer
- 6 Stud
- 7 Nut
- 8 Water plug
- 9 O-ring
- 10 Dowel
- 11 Gasket
- 12 Valve
- 13 Mechanical seal
- 14 Cable clamp flange
- 15 Cable clamp plastic
- 16 Cable clamp washer
- 17 Cable clamp seal
- 18 Upper bracket
- 19 Gasket
- 20 Stator casing
- 21 Bushing
- 22 Mechanical seal ring
- 23 Chrome bush
- 24 Rotor
- 25 Chrome bush
- 26 Key
- 27 Circlip
- 28 Bushing
- 29 Gasket
- 30 Lower bracket
- 31 Counter thrust ring
- 32 Gasket
- 33 Disc
- 34 Disc holder
- 35 Oring
- 36 Segment
- 37 Pin
- 38 Bearing support
- 39 Bearing ball
- 40 Bearing box
- 41 Adjustment cover
- 42 Adjustment screw
- 43 Gasket
- 44 Stud
- 45 Diaphragm
- 46 Diaphragm cover
- 47 Washer
- 48 Nut
- 49 PT100 plug
- 50 Gasket
- 51 Earthing screw

GOLD

Dalgıç Pompa Submersible Pump



GOLD

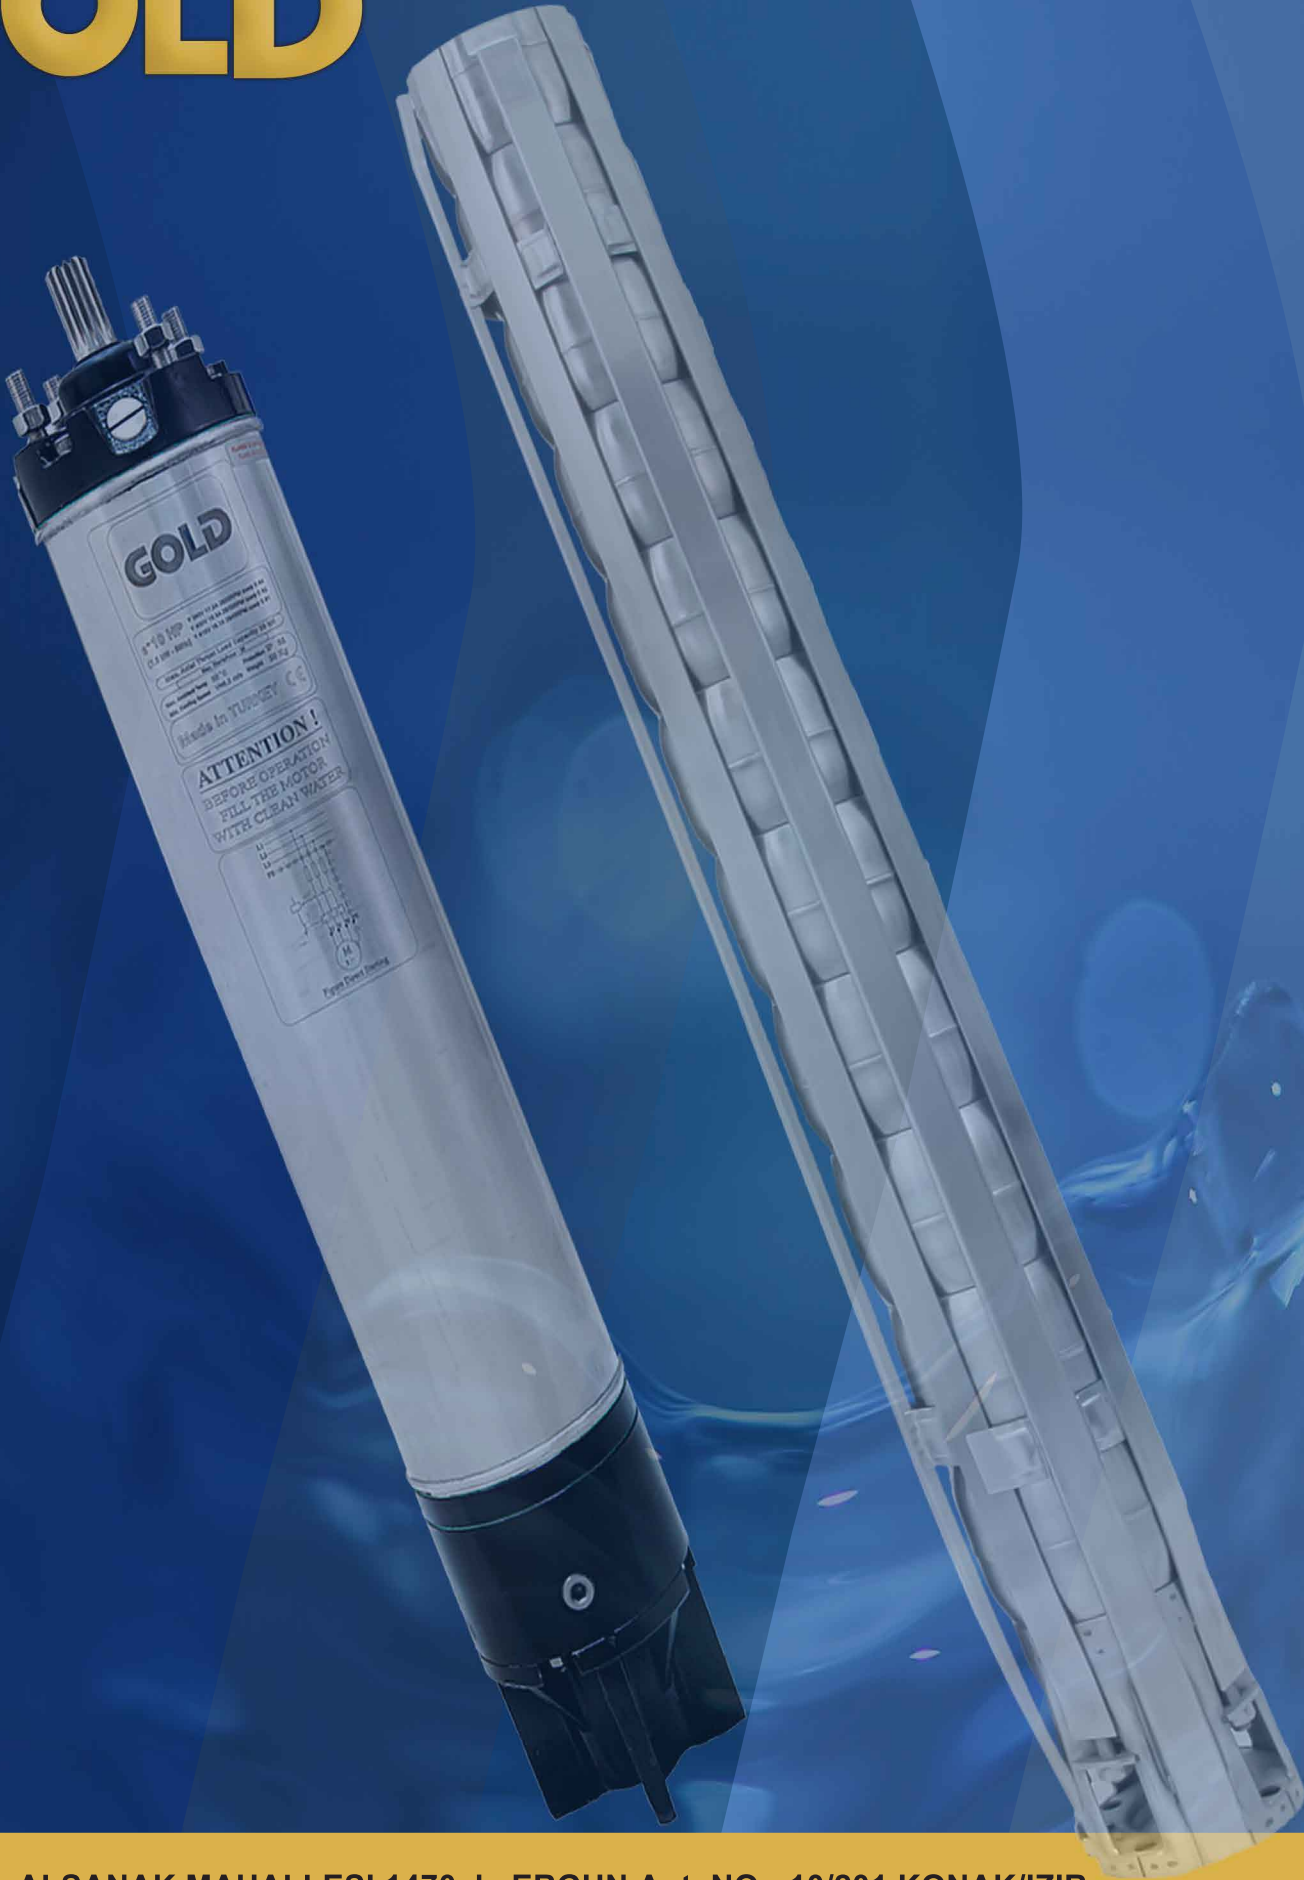

ALSANAK MAHALLESİ 1470sk. ERGUN Apt. NO : 10/201 KONAK/İZİR
KORDON V.D4691062223 Konak / İZMİR - TURKEY